Pumper, PUC

Pumper, PUC, Aluminum

CHASSIS

Enforcer Chassis, PUC

CHASSIS

AXLE, FRONT, CUSTOM
18,000 lb Dana Axle

AXLE, REAR

27,000 lb Dana Axle

ENGINE

400 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

26" Extended Painted Underslung

CAB

7010 Enforcer Cab, PUC

BODY

WATER TANK 750 Gallon Poly Water Tank

COMPT, PUMPER, REAR

46.50" FF Rollup Rear Compt w/Tailboard, PUC

COMPT, PUMPER, LEFT SIDE

177" Rollup Full Height & Depth Front & Rear, PUC

COMPT, PUMPER, RIGHT SIDE
177" Rollup Full Height & Depth Front & Rear, PUC

FIRE SUPPRESSION

PUMPHOUSE

Control Zone, PUC

PUMP

1500 GPM Pierce PUC

CROSSLAYS, 1.50"
(2) 1.50", Poly Trays, 200'

CROSSLAYS, 2.50"
(1) 2.50", Poly Tray, 200'


GENERATOR Smart Power HR 6.2 Hydraulic

Foam System

Husky 12 Single Agent Foam System

Foam Cell

(2) 20 Gallon Foam Cells, Not Reduced Water, PUC

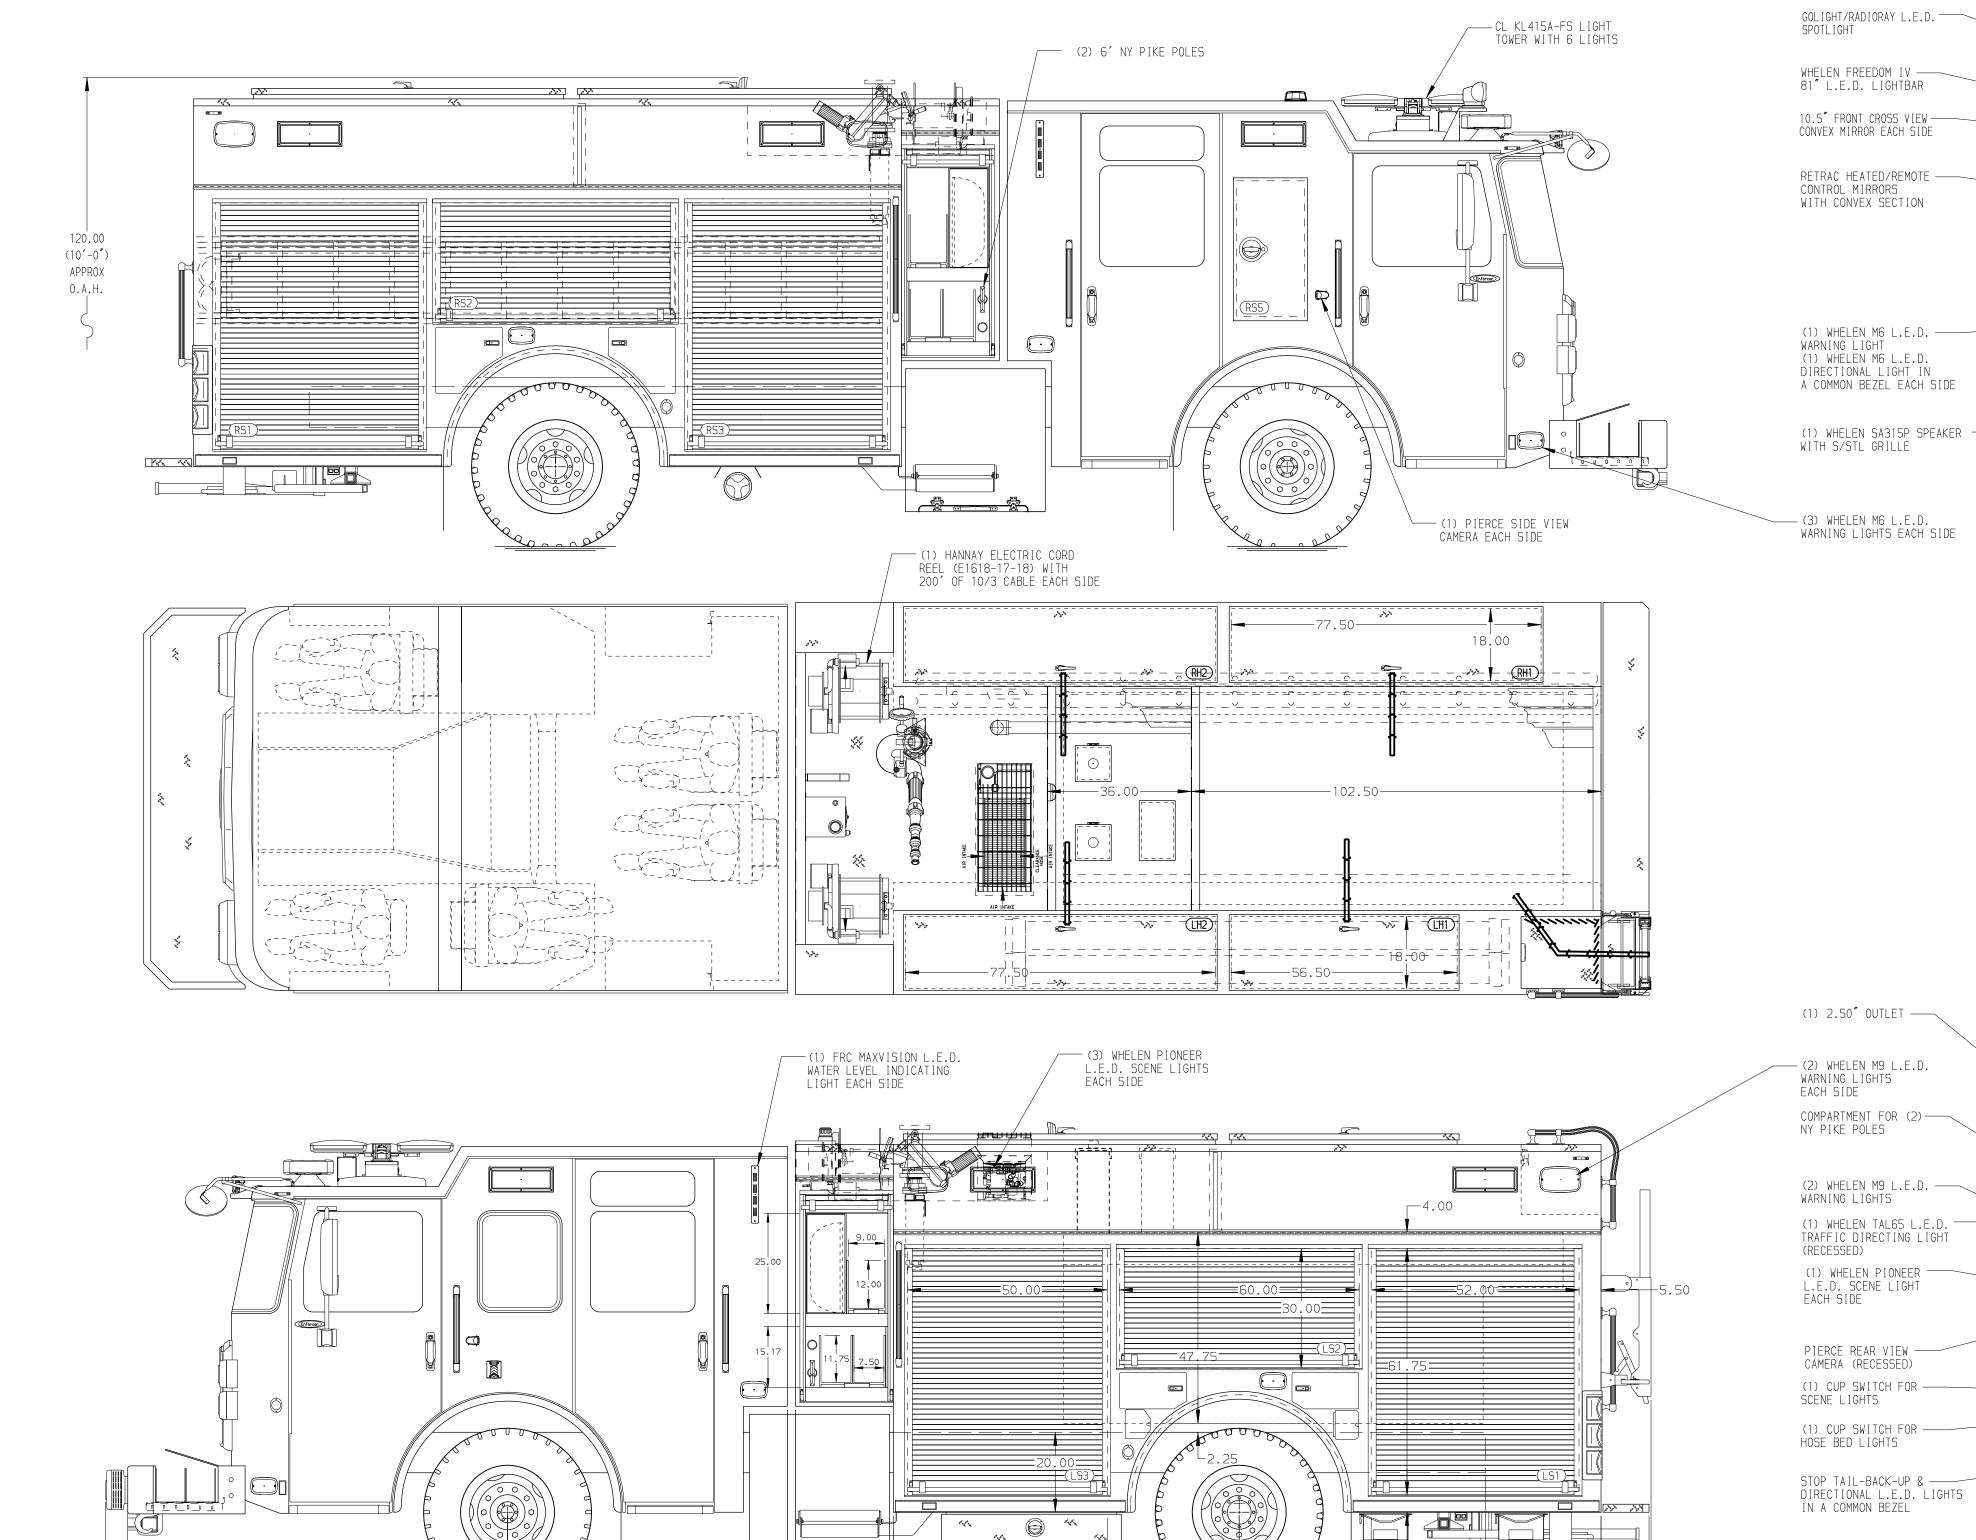


2.00 → ← 24.50 ←

-386.50 (32'-2.50") APPROX OAL

└-4.25 ****

33.00 33.00

8.00° NFPA MIN.

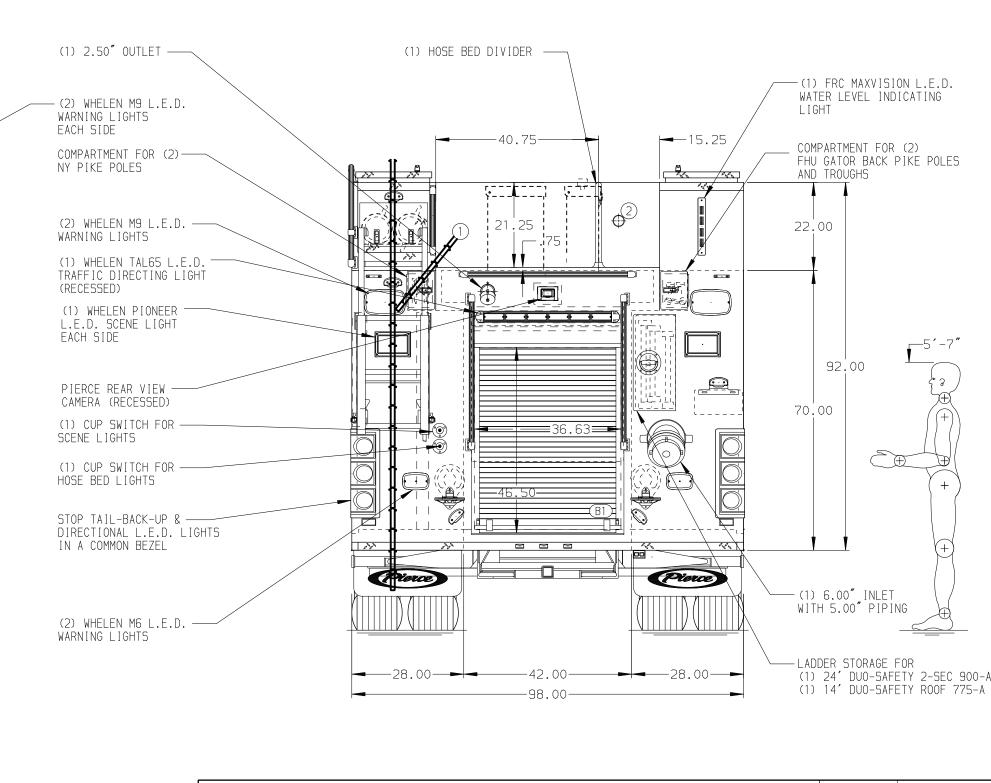

(2) GROVER AIR HORNS —

WHELEN HOWLER SYSTEM ----

—— (1) WHELEN PIONEER L.E.D. VISOR LIGHT

— CENTER HOSE TRAY FOR (2) 150' OF 1.75" HOSE BEDS

HOSEBED CAPACITY

BED 1

1000' OF 5.00" D.J. POLY HOSE

BED 2

600' OF 2.50" D.J. POLY HOSE

— (1) FEDERAL Q2B SIREN

IOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.

MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIYEL LOCATED IN CENTER BUMPER TRAY
2. BLUE SEA SURE EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR OUTLET WITH SHUT OFF VALVE ON THE DRIVER SIDE PUMP PANEL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. NINE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. THREE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
8. ONE SLIDE-OUT TRAY LOCATED IN COMPARTMENT PER SHOP ORDER
9. ONE SWING-OUT TOOLBOARD LOCATED IN COMPARTMENT PER SHOP ORDER
10. TWO TOOLBOARDS ADDED TO SLIDE-OUT TRAY LOCATED IN COMPARTMENT PER SHOP ORDER

5.50-

8.00° NFPA MIN.

> JOB NO. 3660(MANUFACTURING INC. SCALE DATE 1:24 DRAWN BY Pierce PUC Pumper Approval Drawing CHASSIS DATA 27APR21 MMF MAKE CHECKED BY Tippecanoe Twp VFD 7 | 11AUG21 | MMF | GKH 28APR21 COL B/ | 21 JUN21 | MMF | GKH PIERCE SHEET SIZE SHEET NO. MODEL A | 03MAY21 | MMF | COL DWG 36600AD REV DATE BY CH ENFORCER NO.

View File Created 23-AUG-2021 13:54:48