

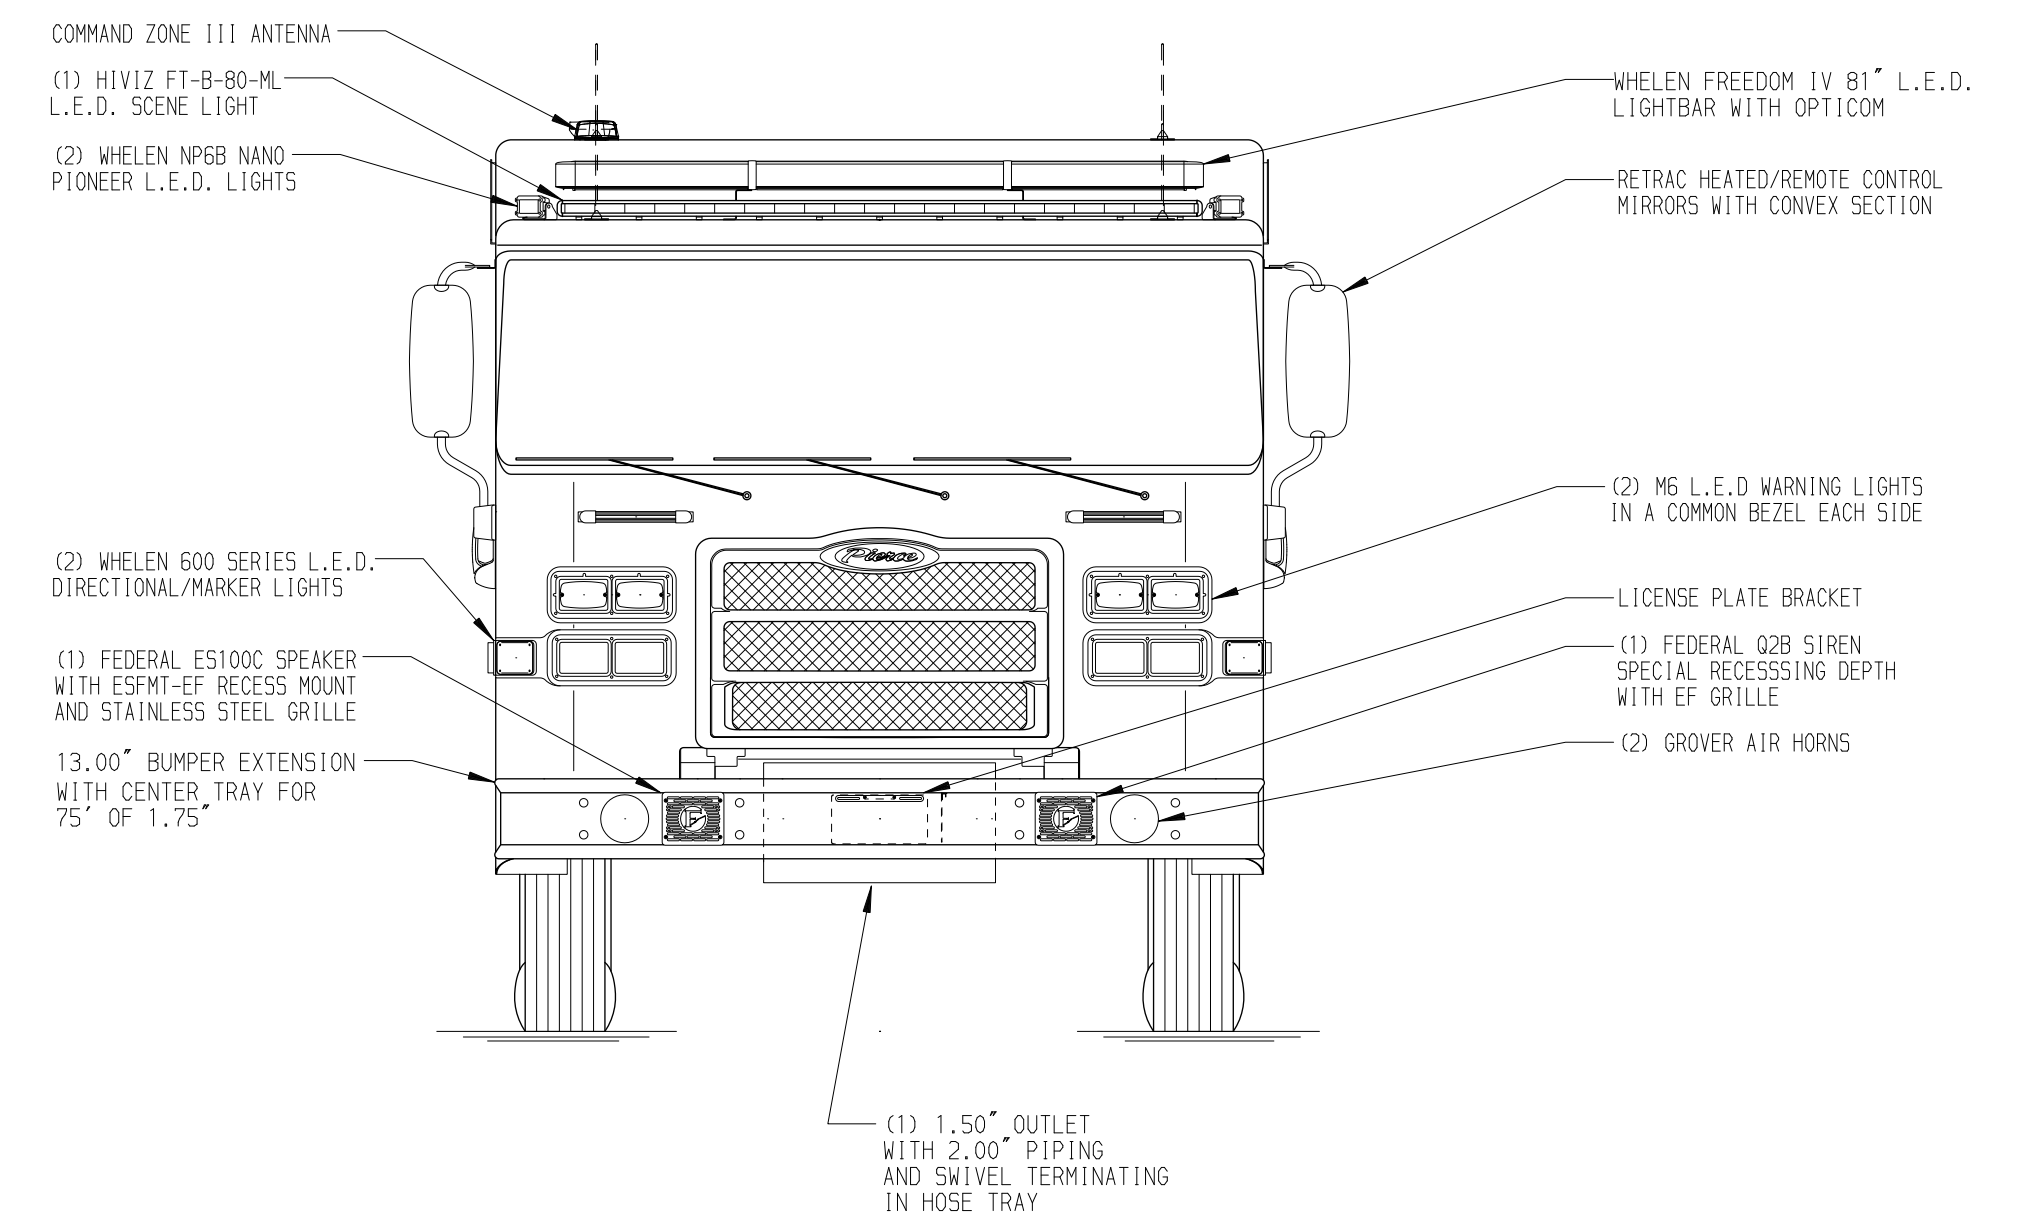


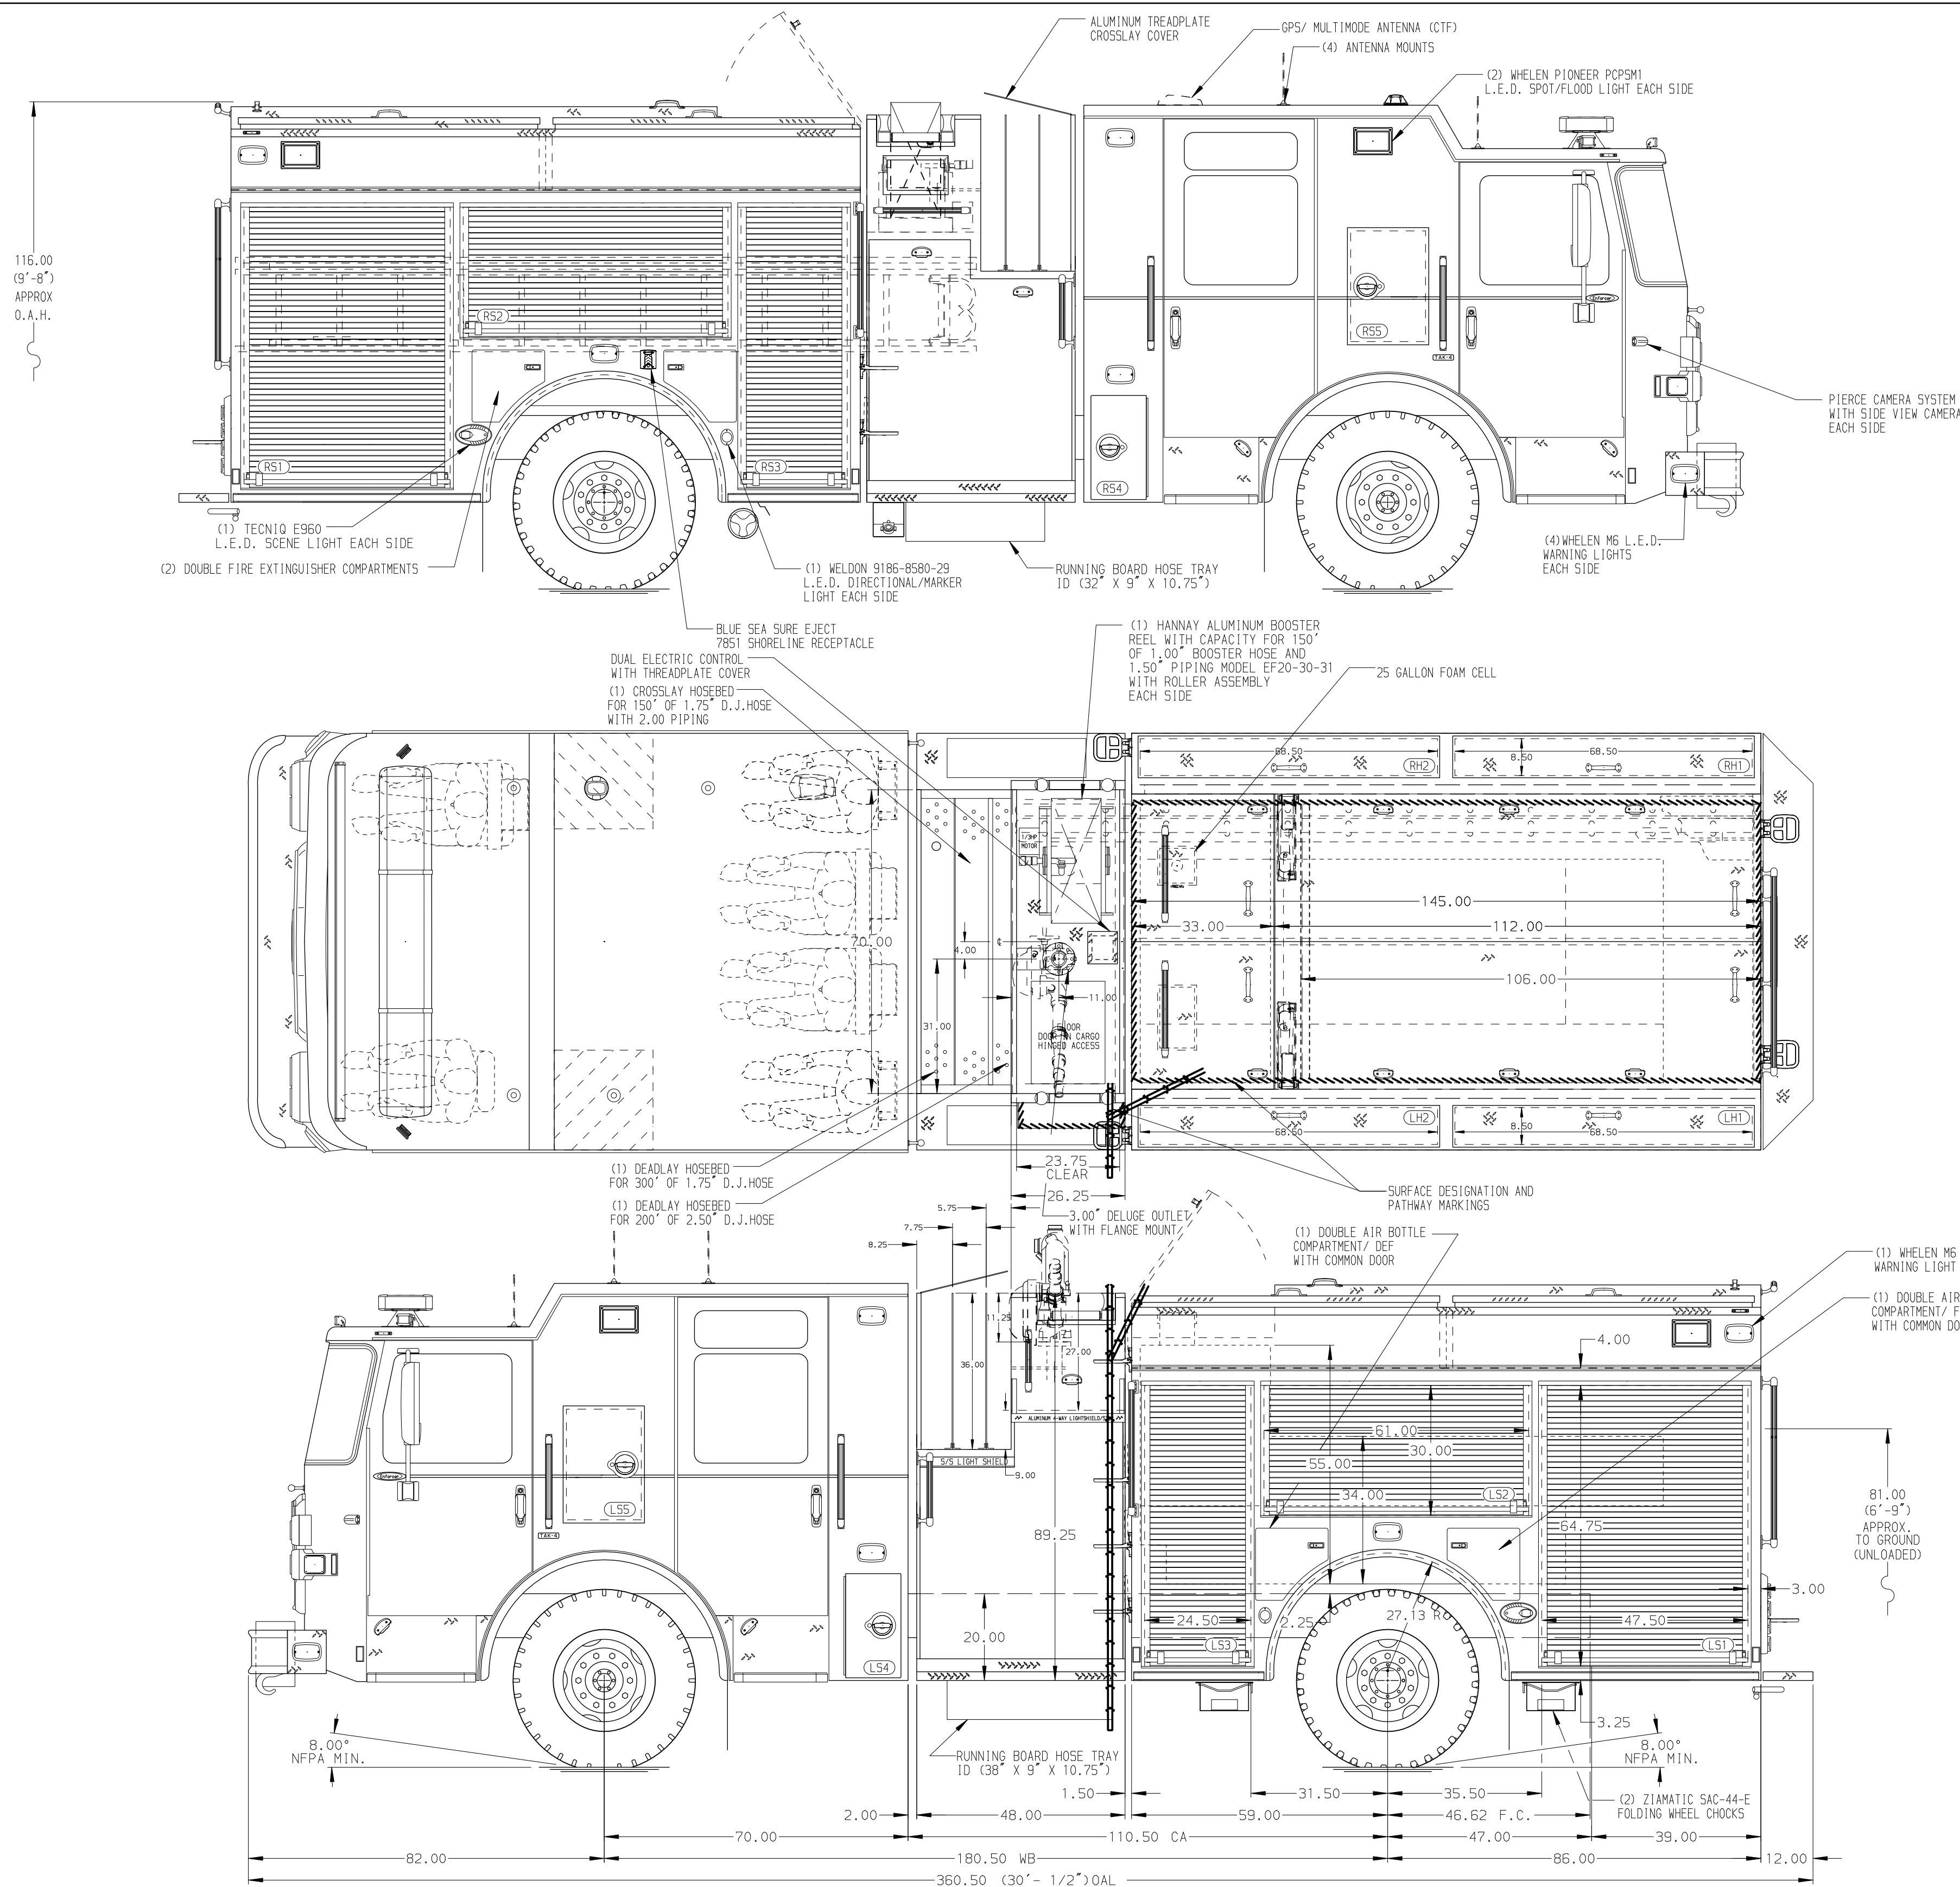

- HOSEBED CAPACITIES
- ① 1000' OF 5.00" D.J.POLY HOSE
 - ② 600' OF 2.50" D.J.POLY HOSE
 - ③ 300' OF 1.75" D.J.POLY HOSE
 - ④ 200' OF 3.00" D.J.POLY HOSE
 - ⑤ 200' OF 3.00" D.J.POLY HOSE

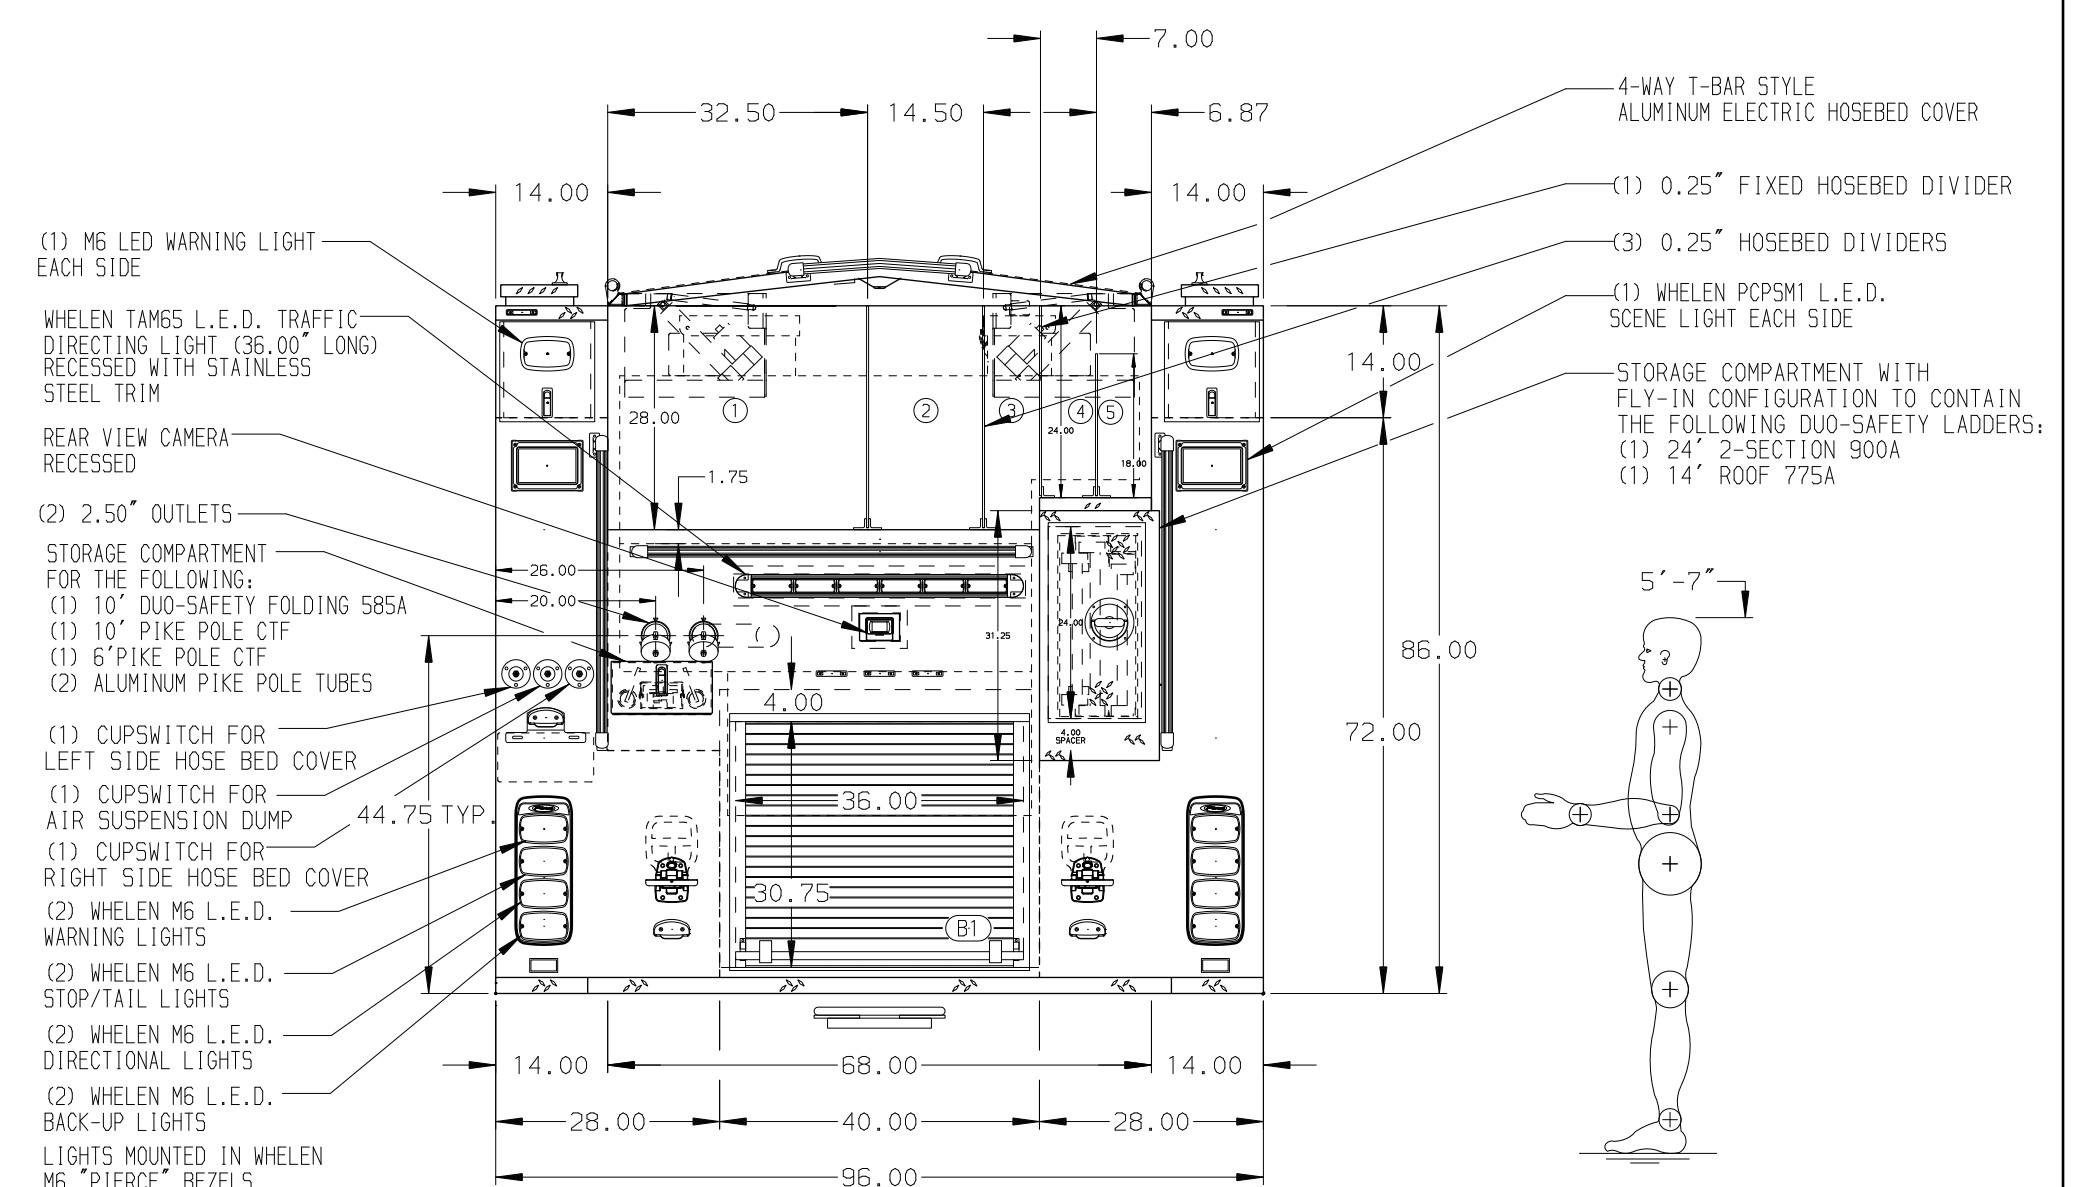

(ALUMINUM BODY)

MAXIMUM O.A.L. 361.50"

MAXIMUM O.A.H. 118.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
2. AMBOR DUAL LED LIGHT STRIPS LOCATED IN HOSE BED
3. FOAM PRO 2002 FOAM SYSTEM
4. BACKBAORD STORAGE COMPARTMENT FOR 3.00' x 18.00' x 72.00' BACKBOARD WITH A 4.50' x 19.50' x 73.50' INSIDE CLEAR DIMENSION SHIPPED LOOSE

				CHASSIS DATA
	20SEP21	LST	BSE	MAKE
	10AUG21	LST	BSE	PIERCE
	21MAY21	LST	BSE	MODEL
REV	DATE	BY	CH	ENFORCE

 MANUFACTURING INC.		JOB NO.	36221 (01-03)
		SCALE 1:24	DATE
TITLE	1500-D-700 WATER/25 FOAM, 145" (EXTENDED 140") BODY (1) CROSSLAY, (2) DEADLAYS, DELUGE		DRAWN BY LST
FOR	SACRAMENTO METROPOLITAN FIRE DISTRICT MATHER, CALIFORNIA		CHECKED BY BSE
DWG NO	36221 AD-SH1		SHEET SIZE D
			SHEET NO. 1 OF 2