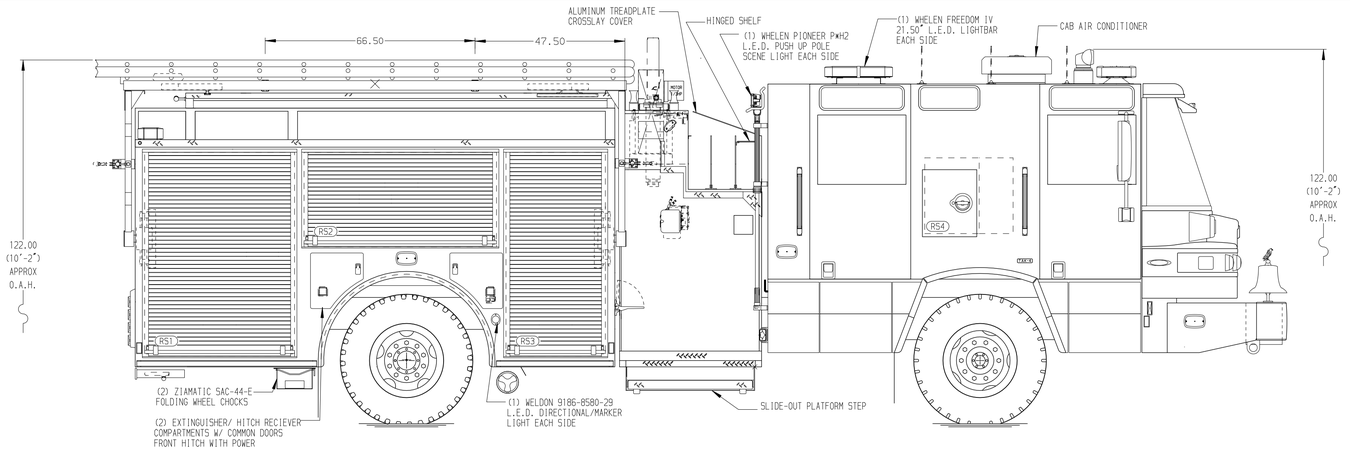

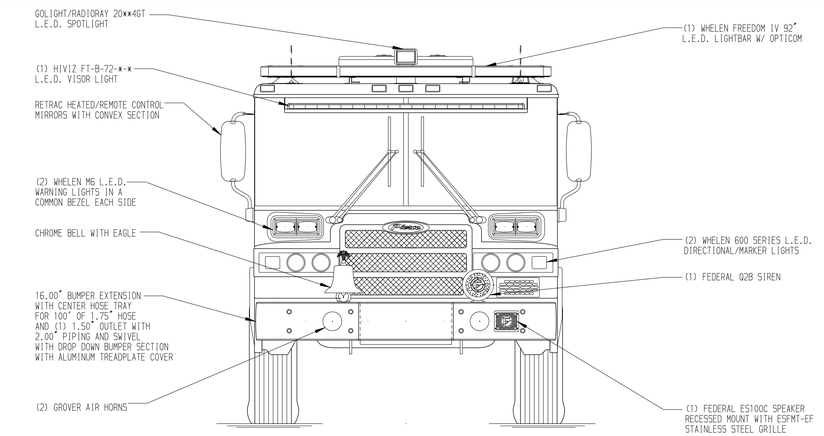

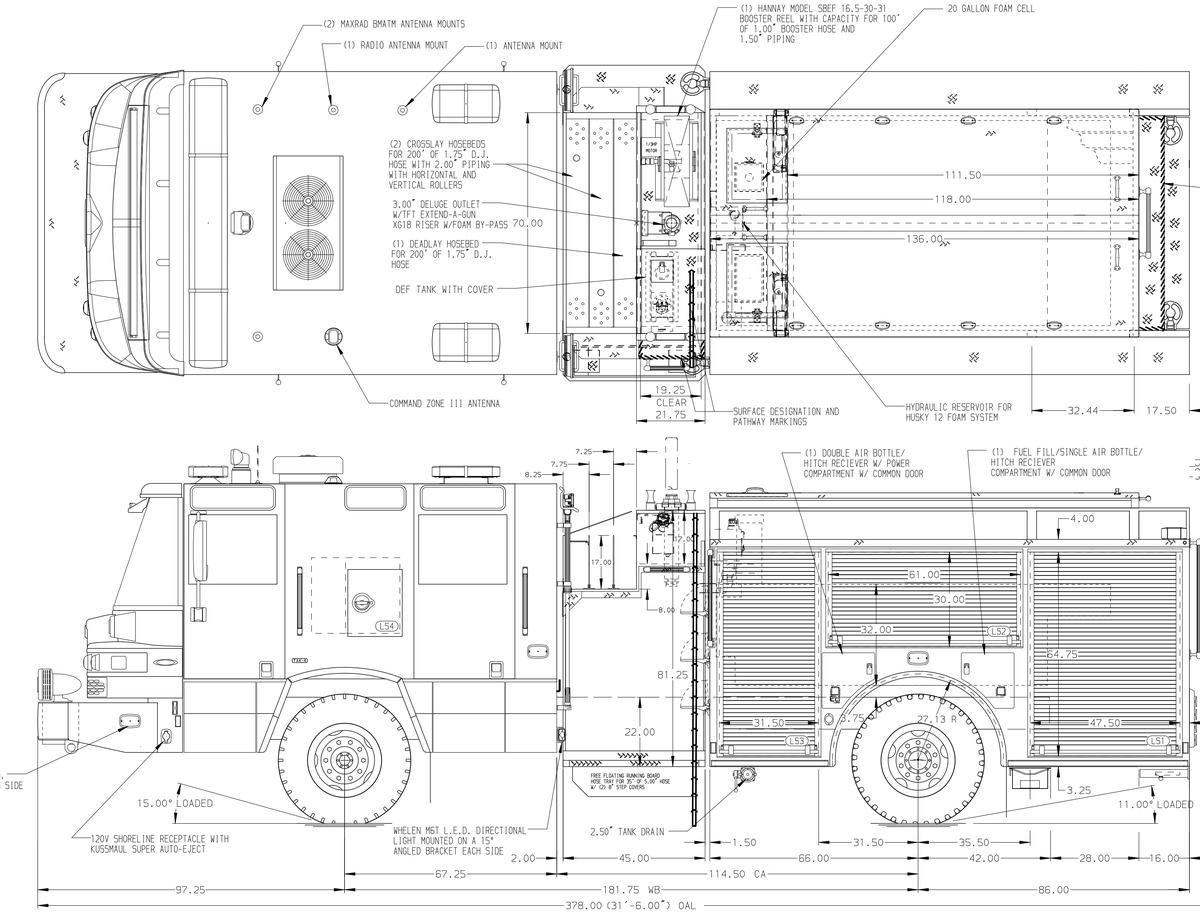

HOSEBED CAPACITIES

1. 250' OF 3.00" D.J. POLY HOSE
2. 600' OF 3.00" D.J. POLY HOSE
3. 900' OF 5.00" D.J. R.L. HOSE
4. 250' OF 1.75" D.J. R.L. HOSE

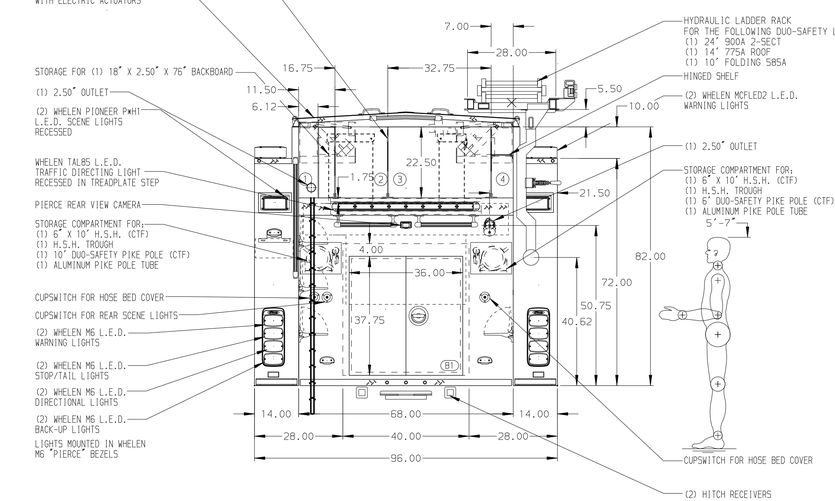

ALUMINUM BODY

MAXIMUM O.A.H. 122.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET/OUTLET WITH DISCONNECT FITTING ON D.S. PUMP PANEL
2. BATTERY CHARGER LOCATED IN CREW CAB SEAT RISER
3. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. L.E.D. LIGHT STRIP LOCATED IN HOSE BEDS PER SHOP ORDER
5. SIX DRIP PAN GUARDS FOR ROLL-UP DOORS LOCATED PER SHOP ORDER
6. ELEVEN FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED 2
7. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
8. ONE CTECH FOUR DRAWER CABINET ASSEMBLY LOCATED PER SHOP ORDER
9. ONE SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN LOCATED PER SHOP ORDER
10. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
11. ONE FULL HEIGHT VERTICAL PARTITION LOCATED PER SHOP ORDER
12. TWO PAC TRACS LOCATED PER SHOP ORDER
13. ONE AIR BOTTLE HOLDER W/ CRS STRAP LOCATED PER SHOP ORDER
14. XANTREX INVERTER LOCATED ?
15. TWO 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

REV	DATE	BY	CH
▽	-	-	-

CHASSIS DATA

MAKE: PIERCE

MODEL: QUANTUM

PIERCE MANUFACTURING INC.

TITLE: 1500-D-600P, 580 GAL OF WATER W/ 20 GAL FOAM CELL
152" FH FDLER, HYDRAULIC LADDER RACK, (2) X-LAYS

FOR: COASTSIDE FIRE DISTRICT
HALF MOON BAY, CALIFORNIA

DWG NO. 36939AD

JOB NO.	36939 01-02
SCALE	1:24
DATE	
DRAWN BY	LST 19JAN22
CHECKED BY	CZA 24JAN23
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 24-JAN-2022 14:33:13