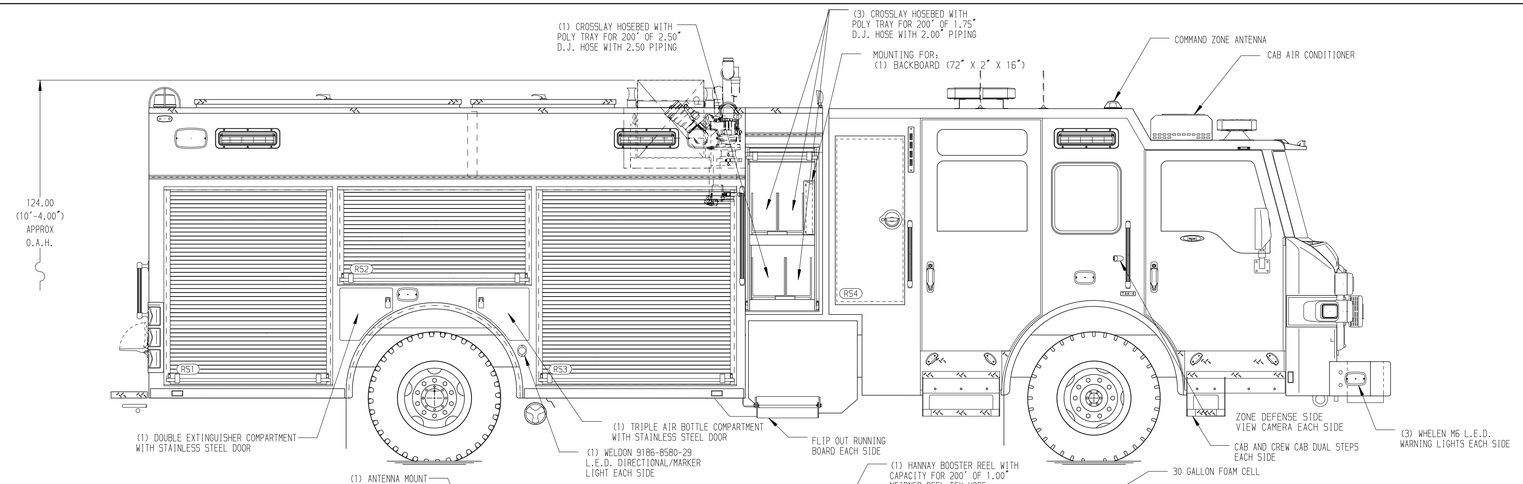

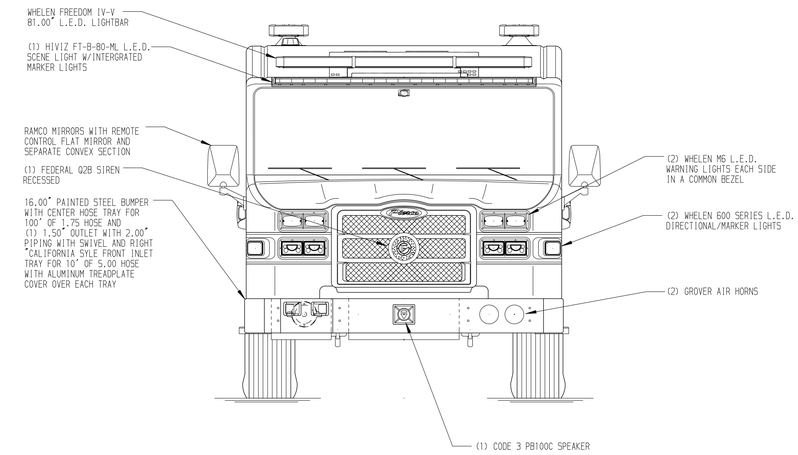

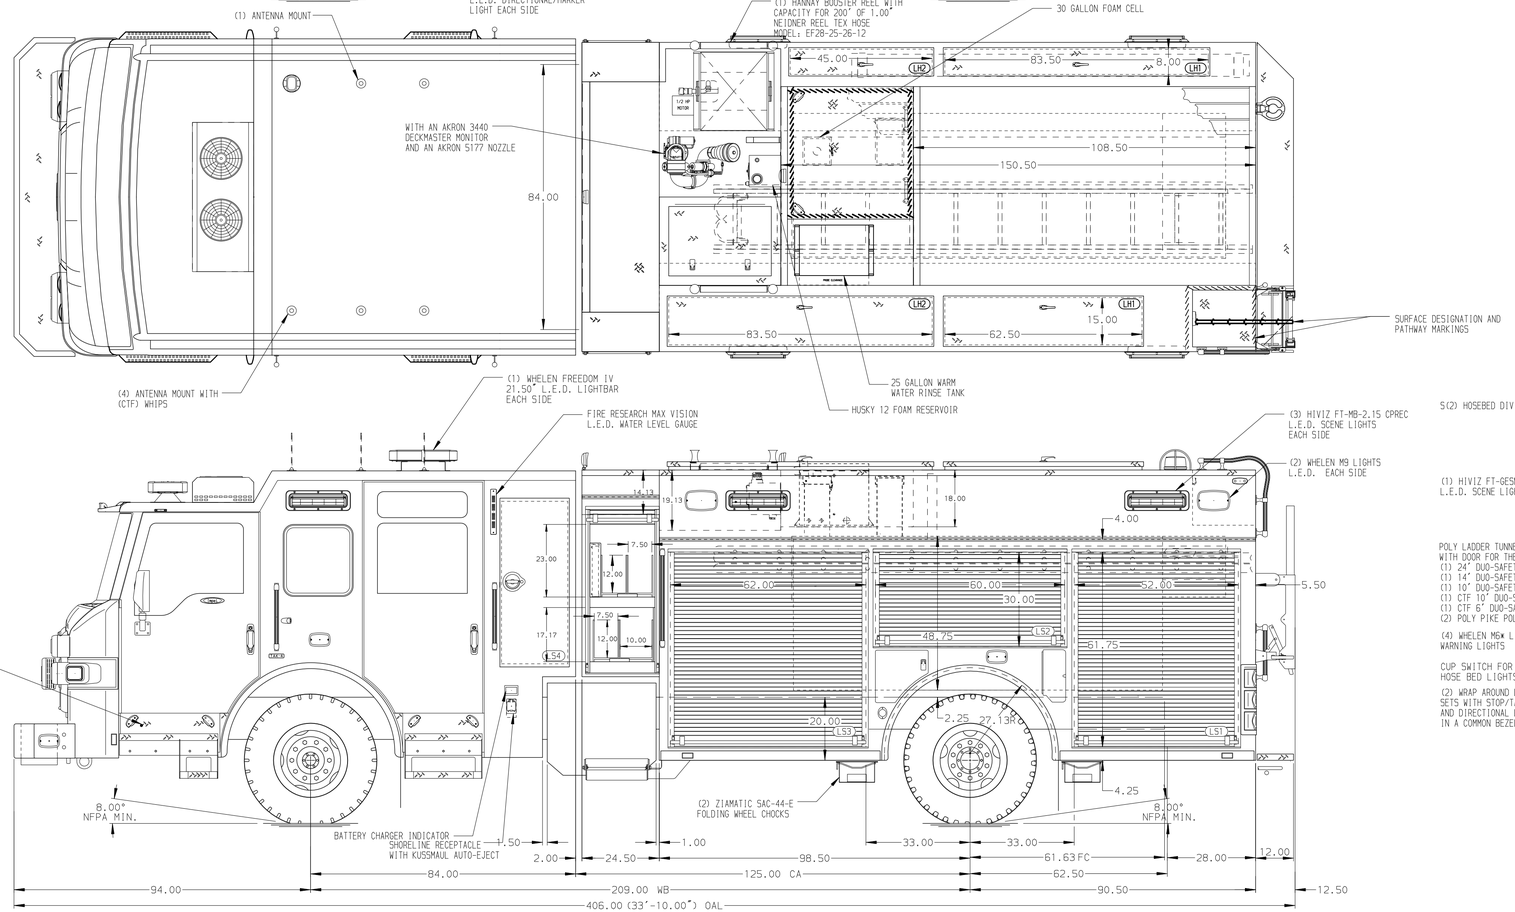

HOSEBED CAPACITIES
(1) 200' OF 2.50" HOSE
(2) 600' OF 2.50" HOSE
(3) 1000' OF 5.00" HOSE

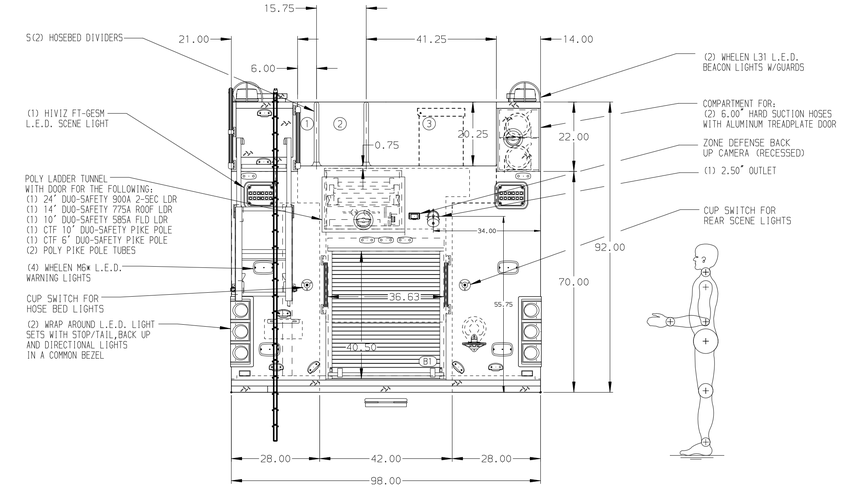

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER/AIR COMPRESSOR LOCATED IN COMPARTMENT LS3
2. 22 POINT VOGEL LUBE SYSTEM
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENTS LS1,B1; TWO IN RS1,RS3
5. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENTS LS2,RS2
6. ONE SLIDE-OUT TOOLBOARD WITH PEGBOARD PATTERN AND BRUSHED FINISH IN COMPARTMENT RS1; TWO IN LS3
7. ONE VERTICAL PARTITION LOCATED IN COMPARTMENTS LS1,RS1,RS3
8. ONE FULL WIDTH/DEPTH FIXED SHELF LOCATED IN COMPARTMENT LS3
9. ONE CTECH (2 DRAWER) CABINET LOCATED IN COMPARTMENT LS3
10. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT B1

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

REV	DATE	BY	CH
▽	-	-	-

CHASSIS DATA
MAKE: PIERCE
MODEL: IMPEL FR

Pierce MANUFACTURING INC.

TITLE: 1500-D-650P, 620 GAL OF WATER W/ 30 GAL FOAM CELL 189" PUC RESCUE, LADDERS THRU TANK, (4) X-LAYS

FOR: GILA RIVER INDIAN COMMUNITY
GILA RIVER, ARIZONA

DWG NO. 36992AD

JOB NO.	36992
SCALE 1:24	DATE
DRAWN BY LME	28JAN22
CHECKED BY NPE	28JAN22
SHEET SIZE D	SHEET NO. 1 OF 1

View File Created 31-JAN-2022 07:11:02