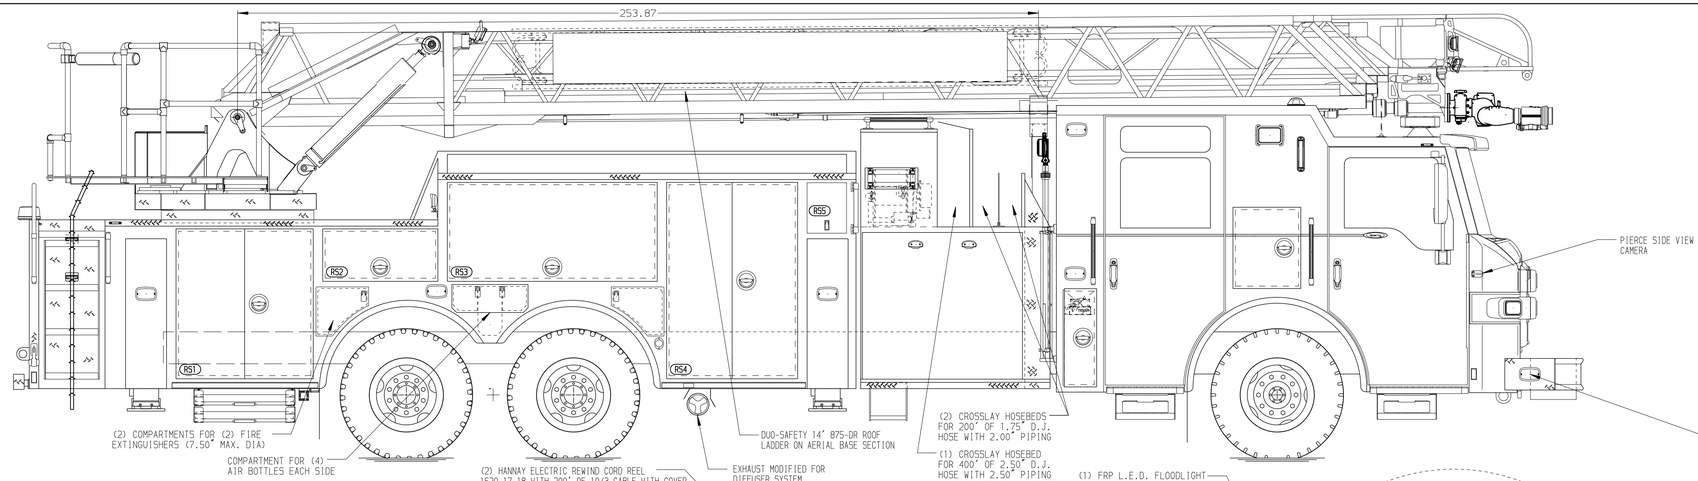

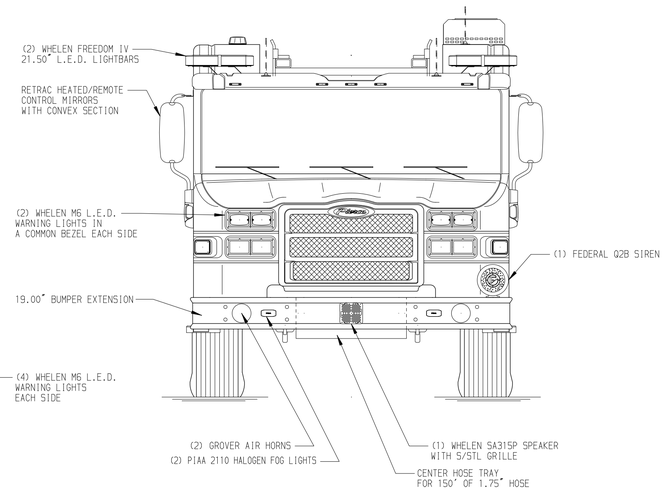

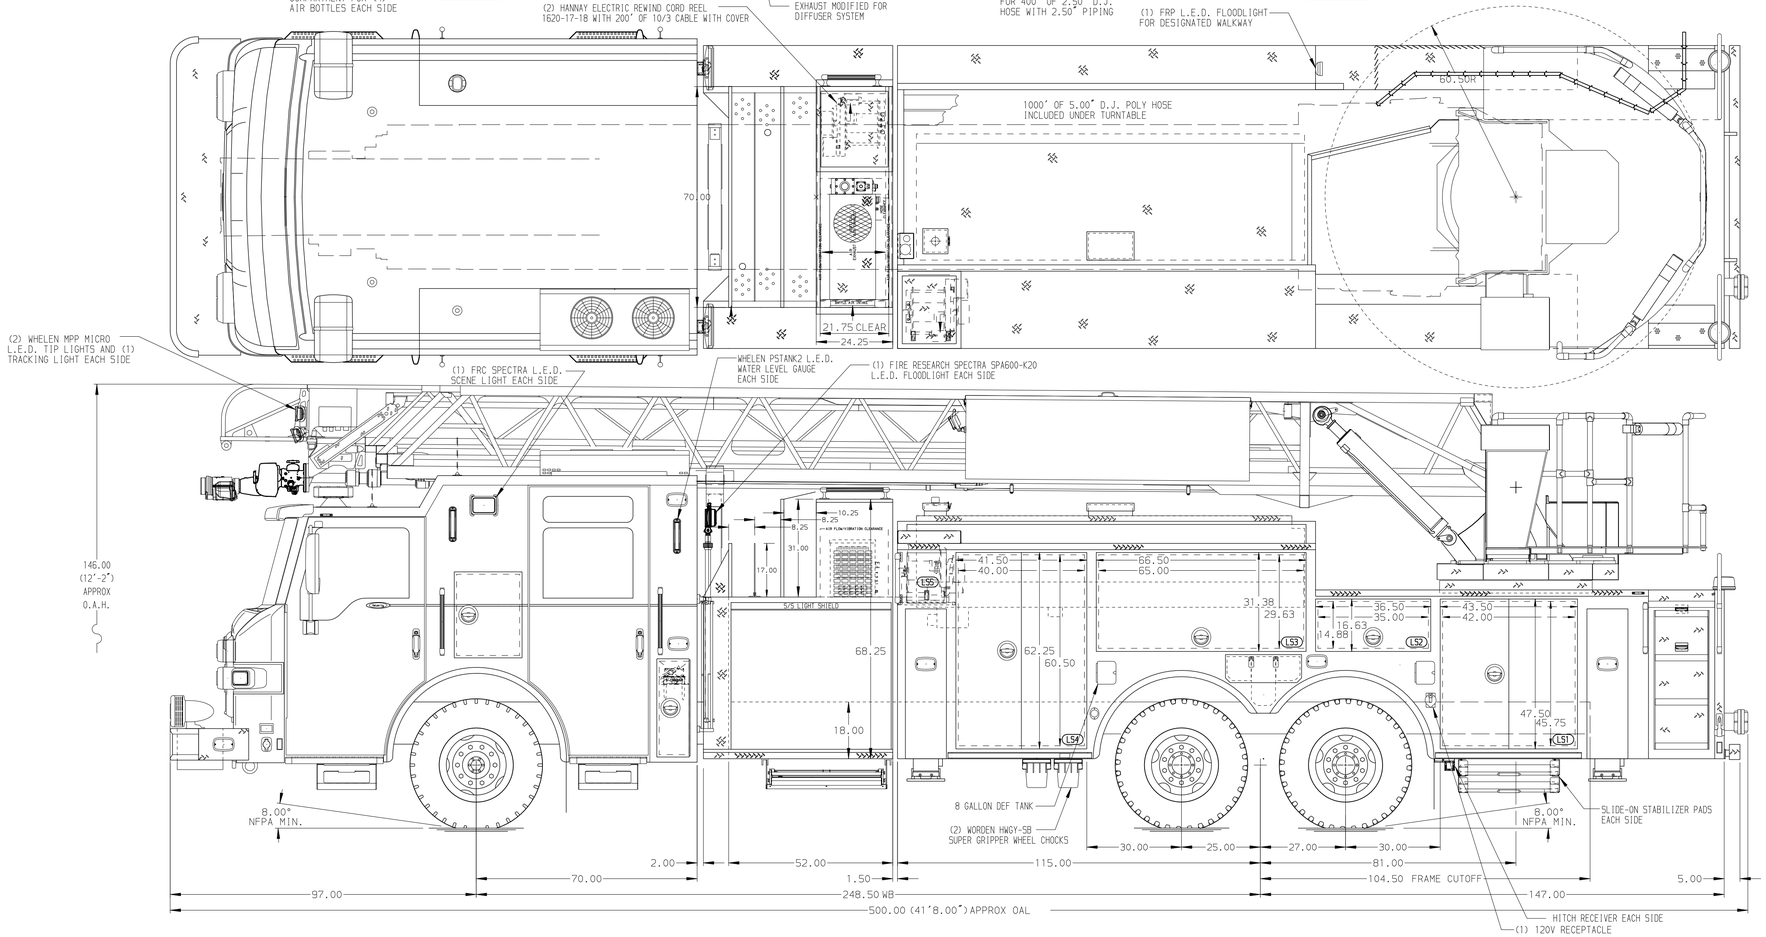

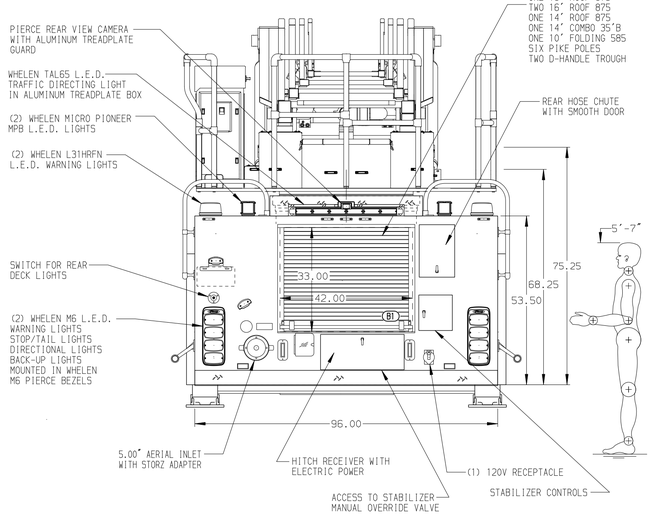

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE FRONT CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED IN CAB PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVERS SIDE FRONT CAB
6. TWELVE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER
8. 3.00" RAISED AERIAL PEDESTAL
9. LIFTING EYE ROPE RESCUE ATTACHMENT AT AERIAL TIP
10. HUSKY 12 FOAM SYSTEM RESERVOIR LOCATED IN PUMP HOUSE
11. PAC BRACKET FOR HALLEGAN TOOL MOUNTED AT FINAL INSPECTION
12. PAC BRACKET FOR PICK HEAD AXE MOUNTED AT FINAL INSPECTION
13. TWO ADJ SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER
14. TWO ADJ TILT/SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER
15. ONE ADJ TOOLBOARD ADDED TO SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
16. CIRCUIT BREAKER PANEL IN COMPARTMENT PER SHOP ORDER
17. RUNG LIGHTING ON AERIAL LADDER
18. 2-WAY INTERCOM SYSTEM BETWEEN AERIAL TIP AND TURNTABLE
19. NO LIMITED RETRACTION NEEDED

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

REV	DATE	BY	CH
▽	-	-	-

CHASSIS DATA
MAKE PIERCE
MODEL VELOCITY

Pierce MANUFACTURING INC.

TITLE: 107' AERIAL LADDER AND BODY ASSEMBLY
500 GALLON TANK, 475 GALLONS WATER, 25 GALLONS FOAM

FOR: YUBA, CITY OF
YUBA, CA

DWG NO. 37088AD

JOB NO.	37088
SCALE	DATE
1:24	
DRAWN BY	
LWE	14JAN22
CHECKED BY	
NDA	18JAN22
SHEET SIZE	SHEET NO.
D	1 OF 1

View File Created 19-JAN-2022 07:09:44