

Saber FR Chassis

27,000 lb Meritor Axle

450 HP Cummins L9 Engine

19" Extended Stainless Steel

7010 Saber FR Cab

44.50" FF Rollup Rear Compt

161" Rollup Full Height Front & Rear FDLER

161" Rollup Full Height Front & Rear FDLER

1500 GPM Waterous CSU

(2) 1.50" Standard Capacity




(1) 2.50" Standard Capacity

Speedlays Not Required

Generator Not Required

Husky 3 Single Agent Foam System

20 Gallon Foam Cell, Reduced Water

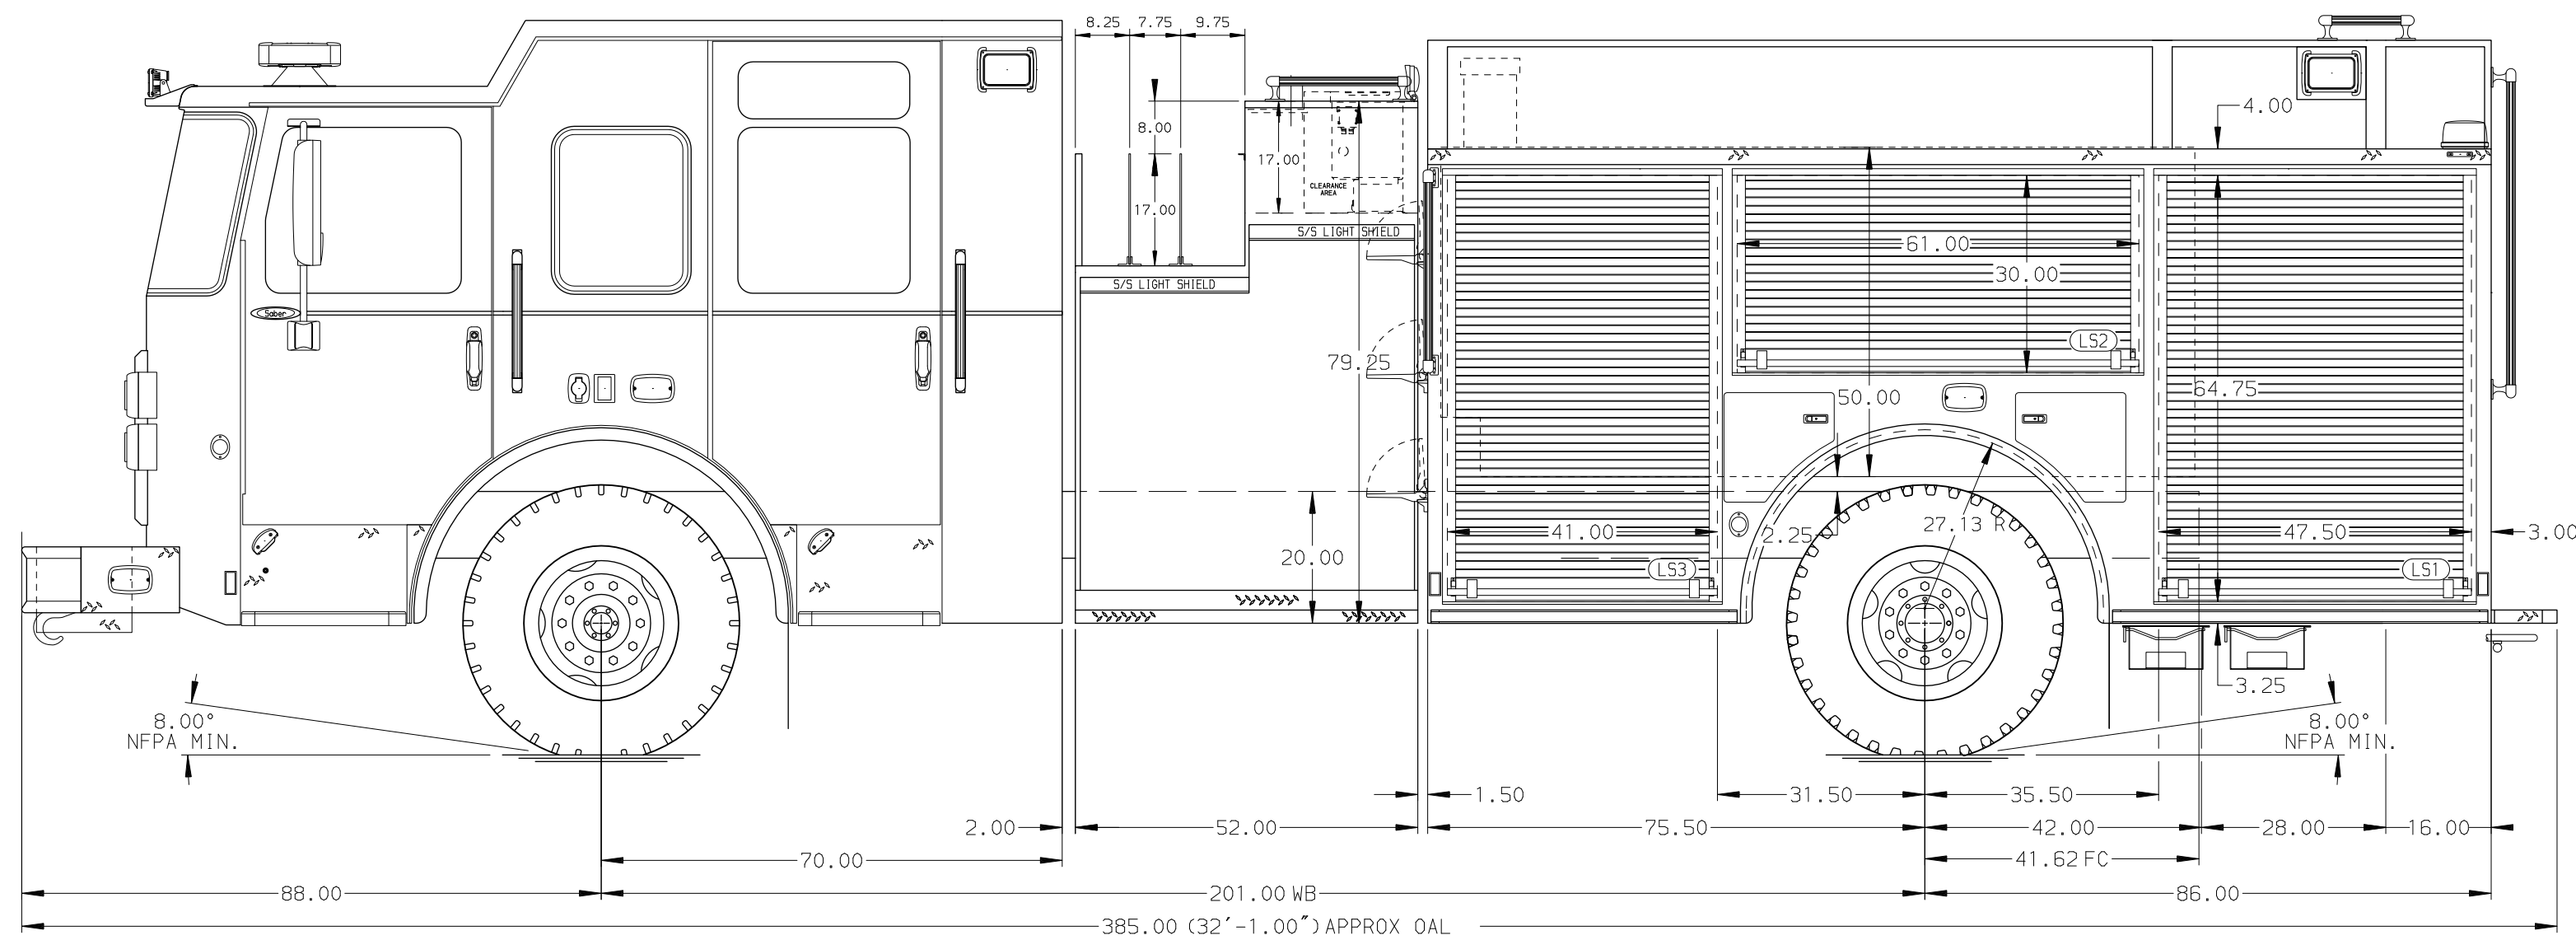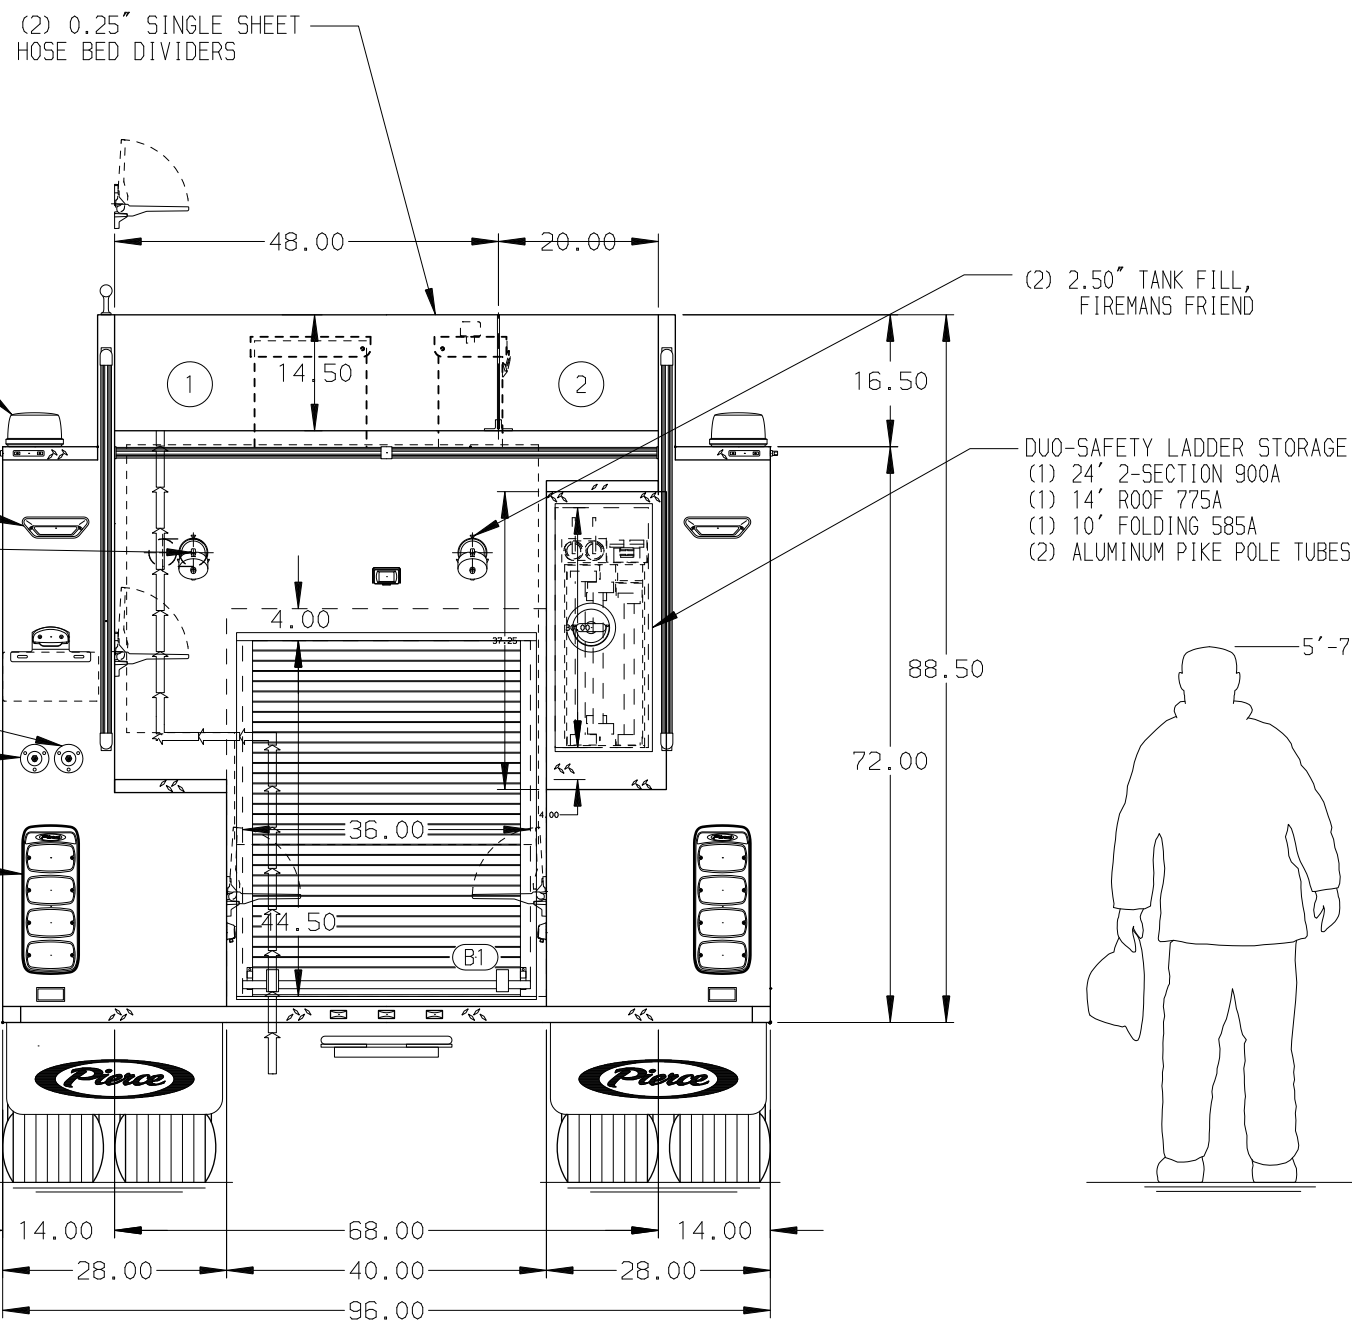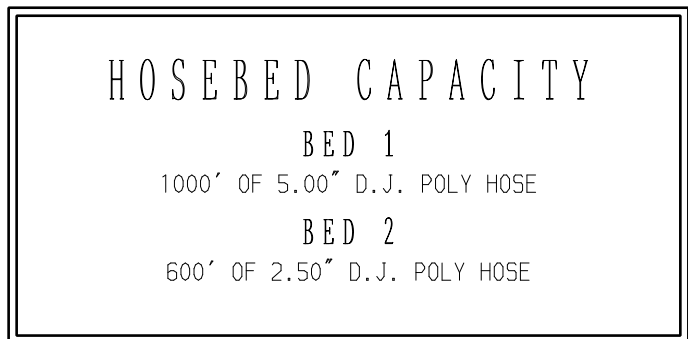

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED BEHIND CAB DOOR
6. ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
8. MOUNTING PROVISIONS FOR FRONT INLET
9. MOUNTING PROVISIONS FOR WILL BURR NIGH SCAN POWERLITE NS 3.0 10" ON CAB

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	DRAWN BY	25MA21
				MAKE	FOR	Pierce Field Unit	CHECKED BY	26MAR21
				PIERCE		Bradenton, Florida	CAG	
	03JUN21	RHU	CAG	MODEL	DWG		SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	SABER FR	NO.	36604AD	D	1 OF 1