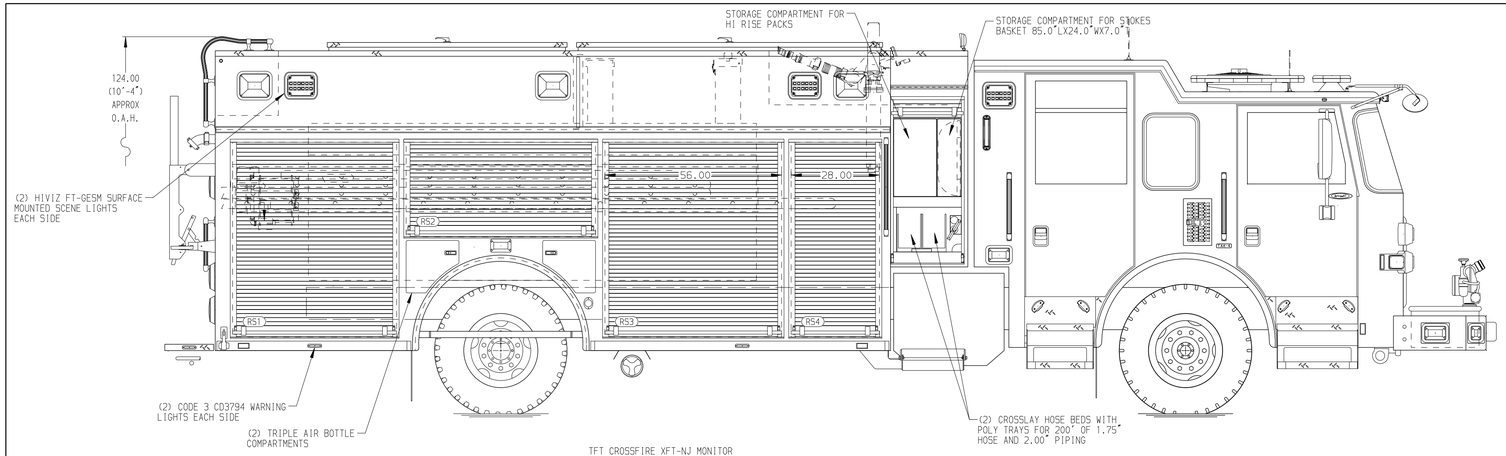

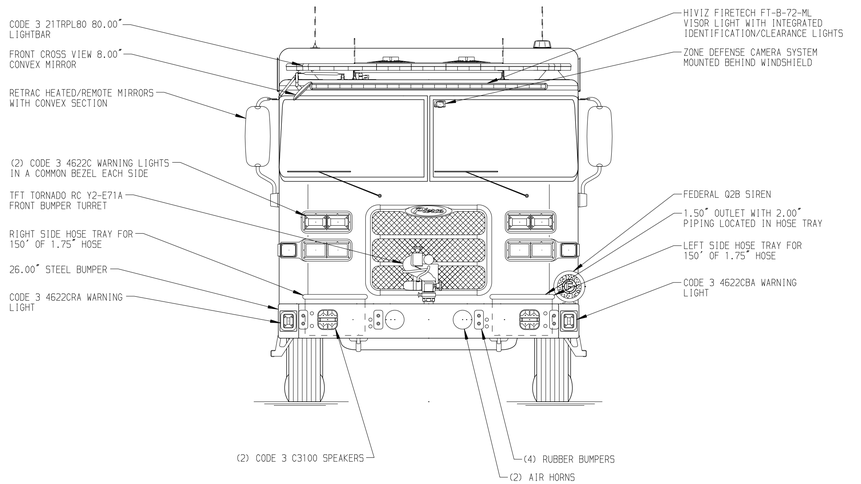

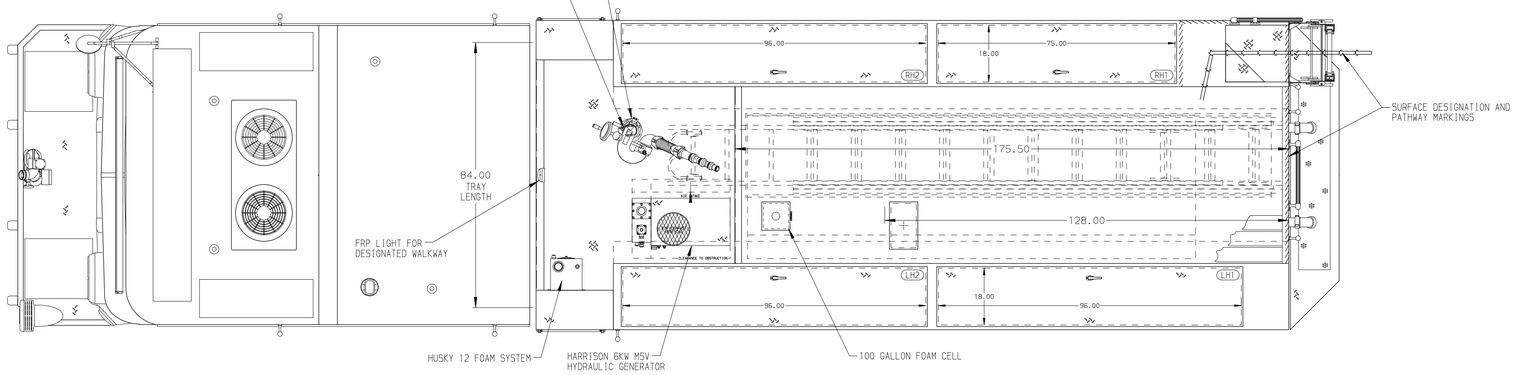

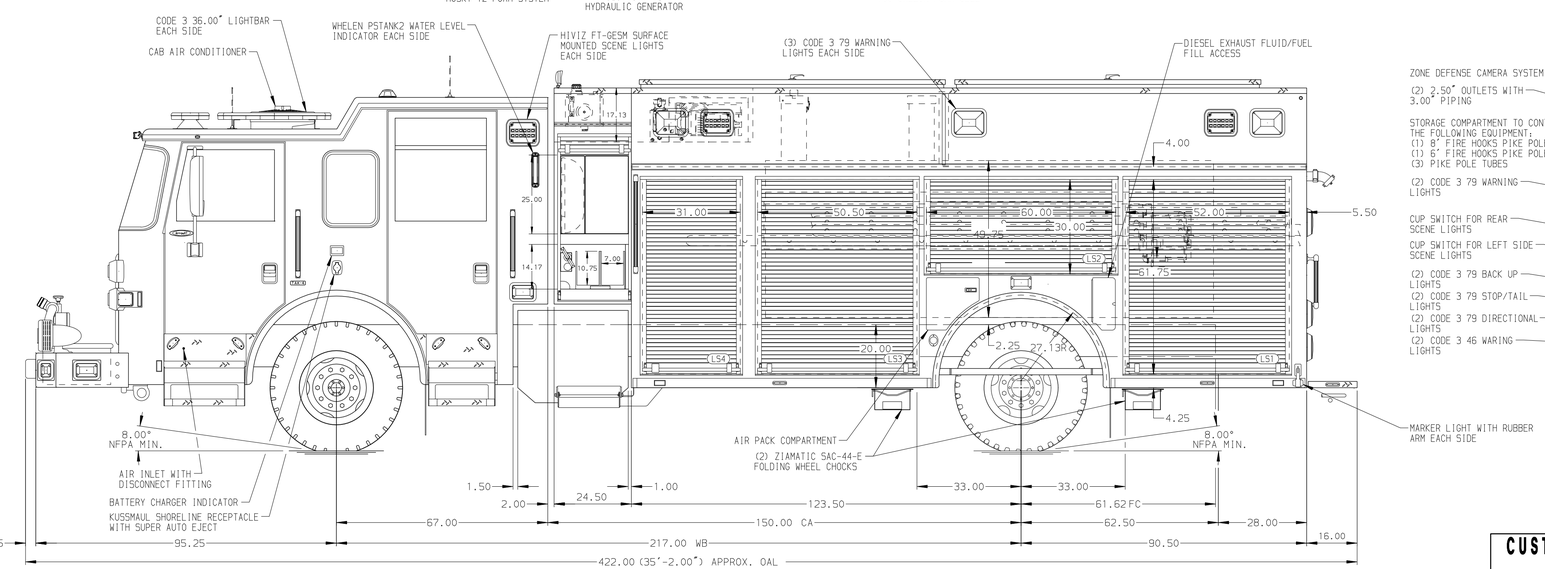

HOSEBED CAPACITIES

1. 500' OF 1.75" D.J. POLY HOSE
2. 500' OF 3.00" D.J. POLY HOSE
3. 1000' OF 5.00" RUBBER HOSE
4. 250' OF 3.00" D.J. POLY HOSE

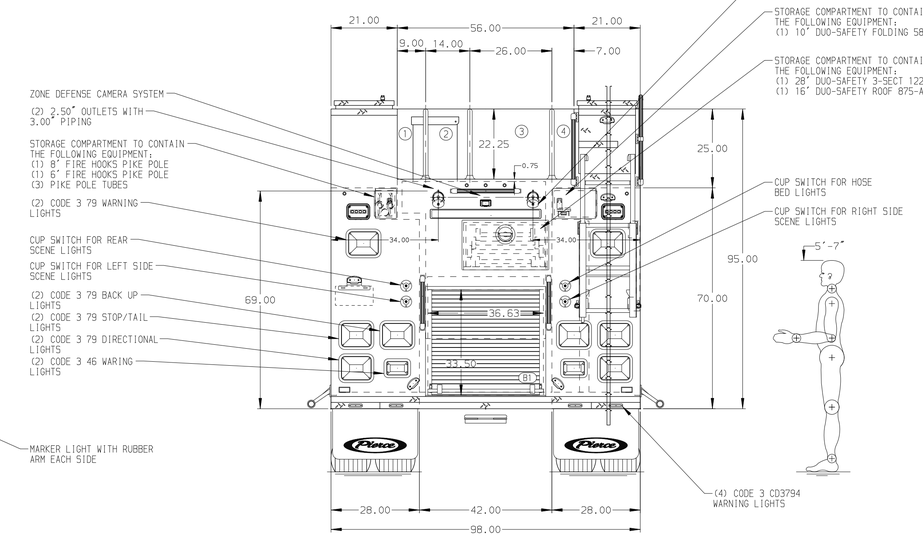

ALUMINUM BODY | SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. TWO HANNAY ECR1618-17-18 3-WIRE ELECTRIC REWIND CORD REEL WITH 200' OF 10/3 CABLE LOCATED IN REAR BODY COMPARTMENTS PER ORDER
2. ONSPOT TIRE CHAINS PROVIDED AT THE REAR
3. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON LEFT SIDE PUMP PANEL PER ORDER
4. BATTERY CHARGER LOCATED PER ORDER
5. EIGHT FULL WIDTH/DEPTH ADJUSTABLE SHELVES WITH SIDES LOCATED PER ORDER
6. ONE ADJUSTABLE SLIDE-OUT TRAY WITH SIDES LOCATED PER ORDER
7. TWO ADJUSTABLE TILT/SLIDE-OUT TRAYS LOCATED PER ORDER
8. FIVE FLOOR MOUNTED SLIDE-OUT TRAYS WITH SIDES LOCATED PER ORDER
9. ONE SWING-OUT TOOLBOARD WITH PEGBOARD PATTERN LOCATED PER ORDER
10. PEGBOARD WITH TRACKS ON REAR WALL LOCATED PER ORDER
11. ONE ADJUSTABLE SUPPORT PLATE LOCATED PER ORDER
12. STORAGE BIN FOR (4) EXTINGUISHERS LOCATED PER ORDER
13. CIRCUIT BREAKER PANEL LOCATED PER ORDER
14. SEVEN 120V DUPLEX RECEPTACLES IN REAR BODY COMPARTMENTS LOCATED PER ORDER

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

Pierce MANUFACTURING INC.

REV	DATE	BY	CH	
▽	-	-	-	MODEL: ARROW XT

CHASSIS DATA
MAKE: PIERCE

TITLE: 1500-D-800P,700 GAL WATER W/100 GAL FOAM CELL 214" PUC RESCUE BODY,LADDERS THRU TANK,DELUGE
FOR: PORT AUTHORITY OF NEW YORK AND NEW JERSEY NEW YORK, NY
DWG NO.: 37526AD

JOB NO.	37526
SCALE	1:24
DATE	
DRAWN BY	BST 07JUL22
CHECKED BY	MGE 07JUL22
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 08-JUL-2022 06:54:55