


PUMPER BODY Long Aluminum 2nd Gen Pumper CHASSIS Sober FR Chassis
CHASSIS AXLE, FRONT, CUSTOM 20,000 Lb Dana Axle AXLE, REAR 27,000 Lb Meritor Axle ENGINE 450 HP Cummins L9 Engine TRANSMISSION Allison 5th Gen, 3000 EVS P BUMPER 19" Extended Stainless Steel CAB 7010 Sober FR Cab
BODY WATER TANK 980 Gallon Poly Water Tank COMPT, PUMPER, REAR 44.50" FF RollUp Rear Compt COMPT, PUMPER, LEFT SIDE 161" RollUp Full Height Front & Rear FDLER COMPT, PUMPER, RIGHT SIDE 161" RollUp Full Height Front & Rear FDLER
FIRE SUPPRESSION PUMPHOUSE 52" Control Zone Side Mount PUMP 1500 GPM Waterous CSU CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" (1) 2.50" Standard Capacity SPEEDLAYS SpeedLays Not Required GENERATOR Generator Not Required Foam System Husky 3 Single Agent Foam System Foam Cell 20 Gallon Foam Cell, Reduced Water

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
- MOUNTING PROVISIONS FOR FRONT INLET
- MOUNTING PROVISIONS FOR WILL BURT NIGH SCAN POWERLITE NS 3.0 10" ON CAB

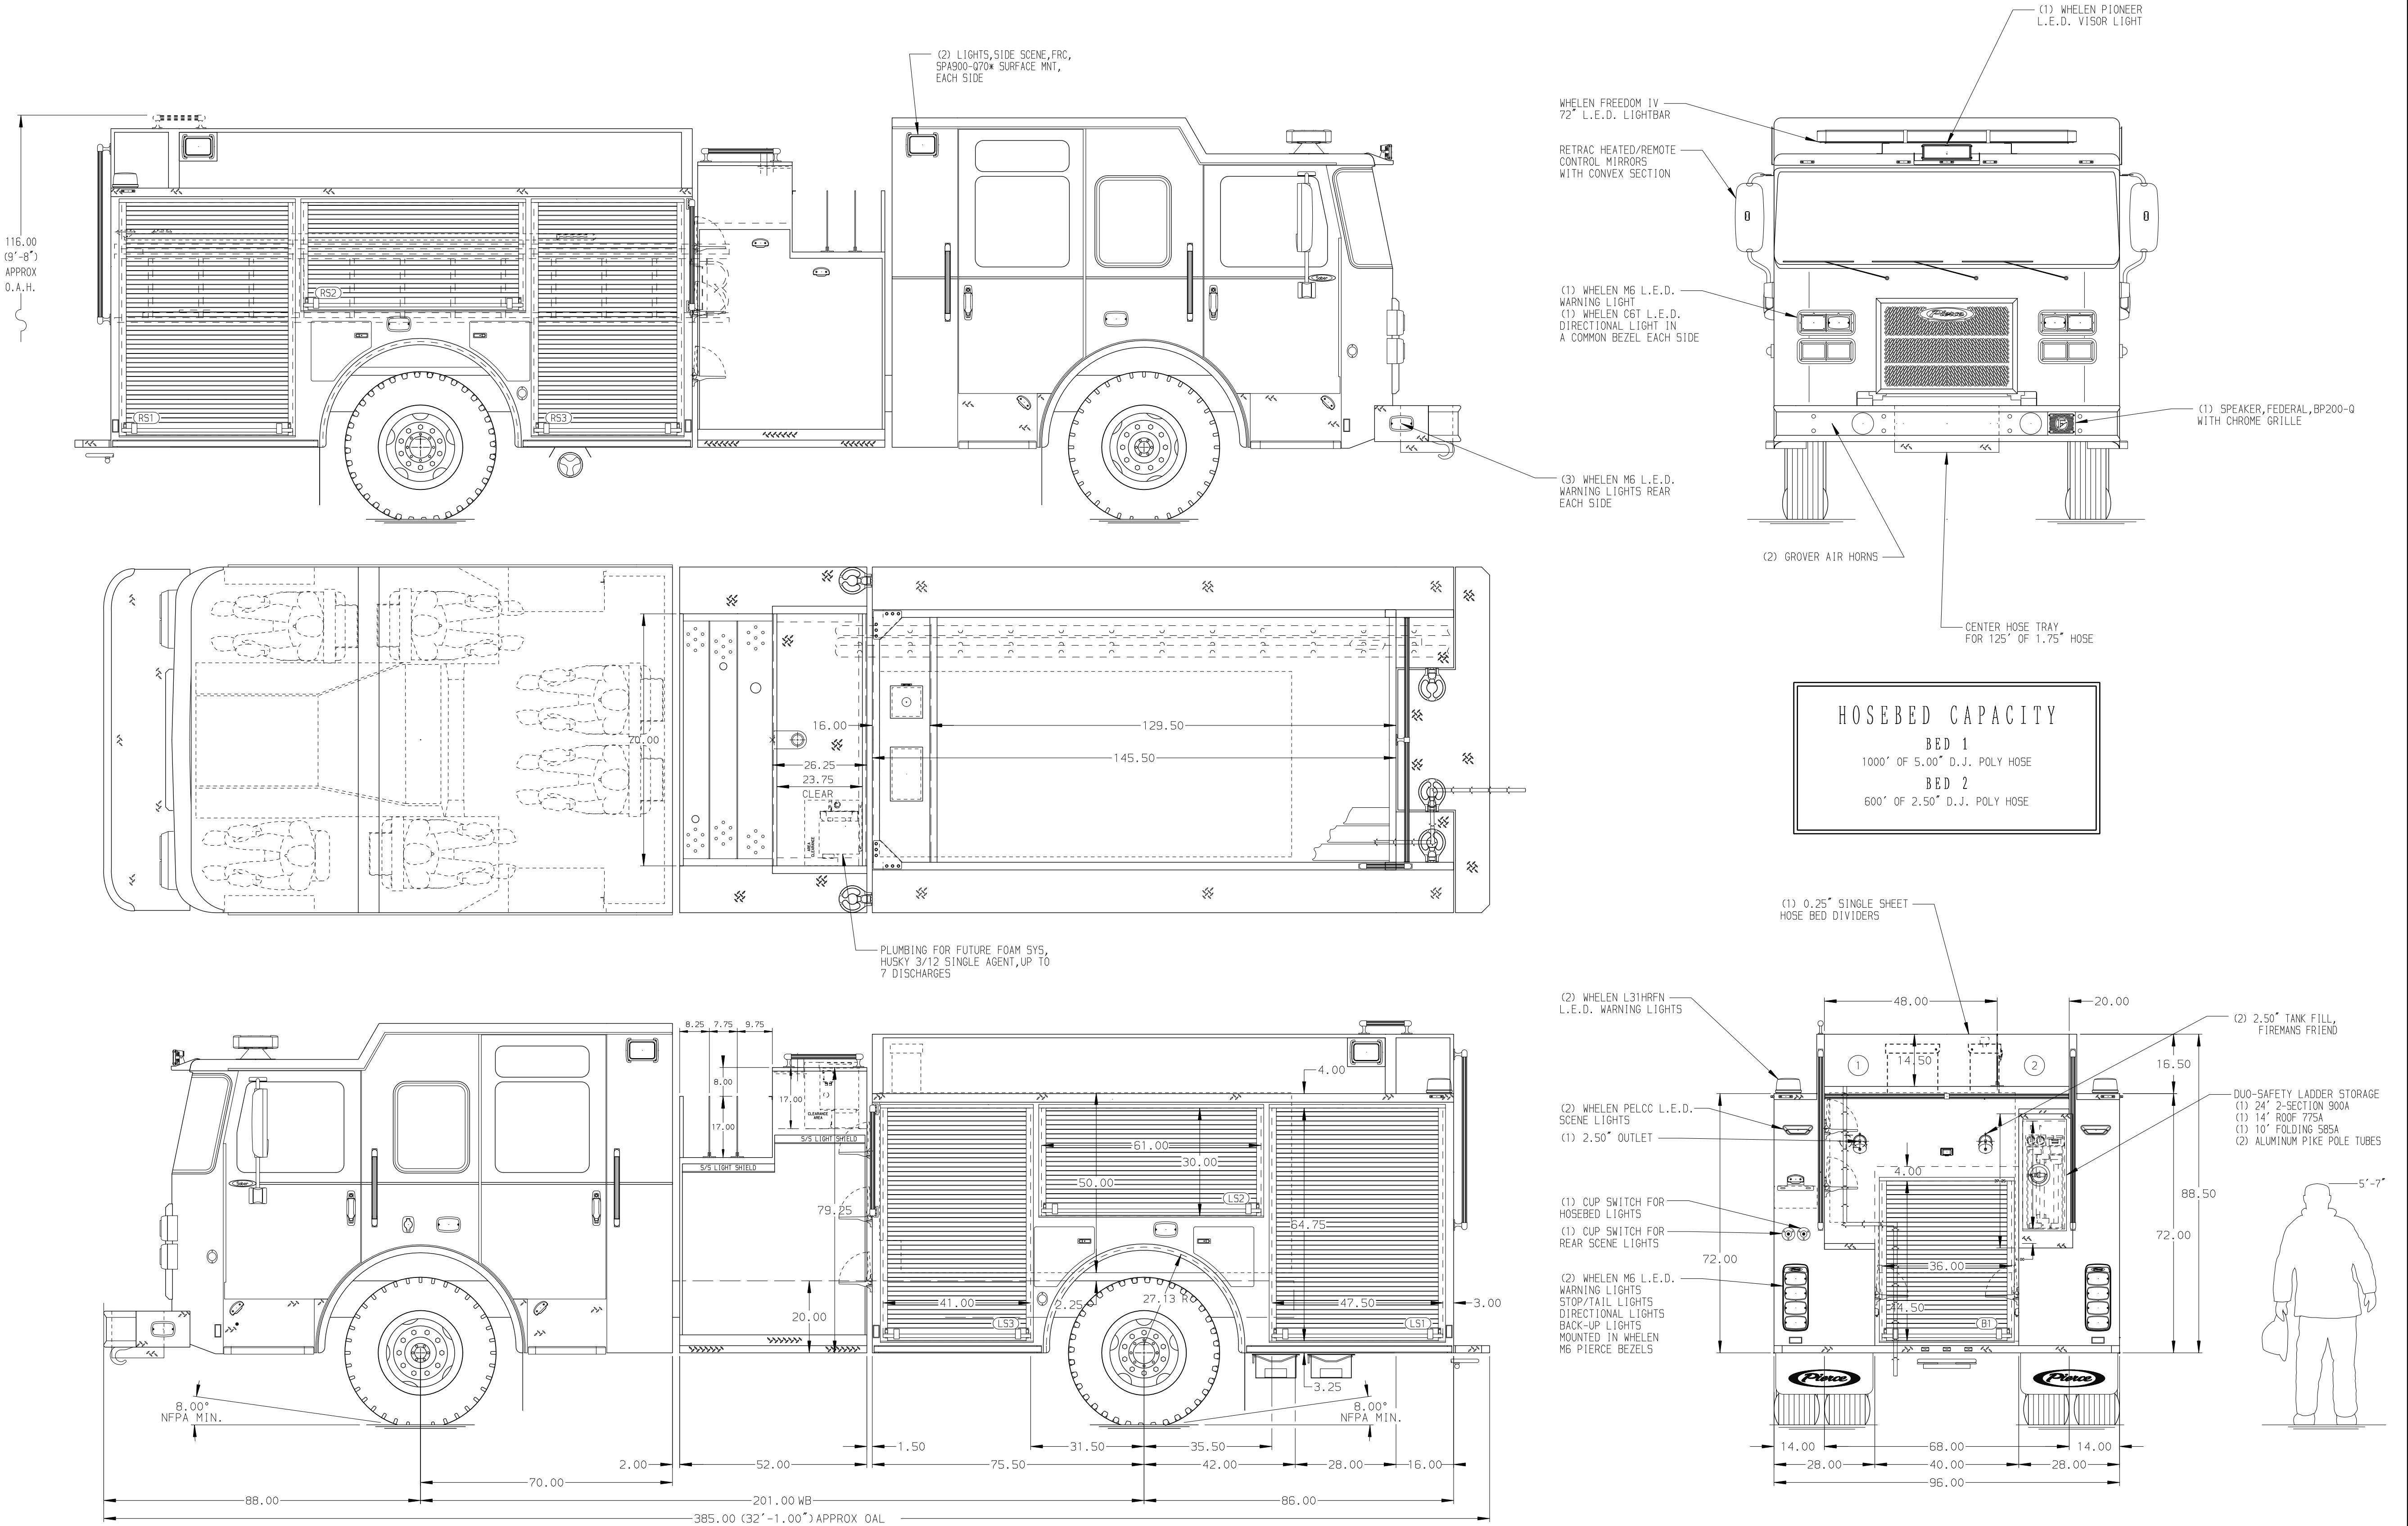

TITLE Pierce Pumper Approval Drawing

FOR Pierce Field Unit
Bradenton, Florida

DWG NO. 36683AD

JOB NO. 36683

SCALE 1:24 DATE

DRAWN BY JLA 22APR21

CHECKED BY CAG 23APR21

SHEET SIZE D SHEET NO. 1 OF 1

CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
MAKE	FOR	Pierce Field Unit Bradenton, Florida
MODEL	DWG NO.	36683AD
SABER FR	REV	DATE