RIGHT SIDE COMPARTMENTS CONTAIN THE FOLLOWING:

COMPARTMENT RS1 CONTAINS:
- (1) FALSE FLOOR
- (1) STD DEPTH ADJ SHELF
- (1) VERTICAL COMPARTMENT DIVIDER
- (1) STD DEPTH ADJ SLIDE OUT TRAY
- (1) OIL DRY HOPPER
- (1) SLIDE OUT DRAWER WITH DIVIDER
-
-
-

COMPARTMENT RS2 CONTAINS:
- (1) STD DEPTH ADJ SLIDE OUT/TILT TRAY
- (2) 20A,120V DUPLEX RECEPTCLES
-

COMPARTMENT RS3 CONTAINS:
- (1) STD DEPTH ADJ SLIDE OUT/TILT TRAY
- (4) POLY TOOL BOXES
- PEGBOARD ON RIGHT AND LEFT WALLS
-
-
-

COMPARTMENT RS4 CONTAINS:
- (1) STD DEPTH ADJ SHELF
- PEGBOARD ON RIGHT AND LEFT SIDE BODY WALLS
- (1) STD DEPTH ADJ SLIDE OUT TRAY
- (1) STD DEPTH FLOOR MOUNTED TRAY

COMPARTMENT RS5 CONTAINS:
- (2) STD DEPTH ADJ SLIDE OUT TOOL BOARDS
- (1) STD DEPTH FLOOR MOUNTED TRAY SPL SIDES
- PEGBOARD ON REAR AND SIDE BODY WALLS FULL HEIGHT ON LEFT WALL, UPPER HALF ON REAR AND RIGHT SIDE WALL
-

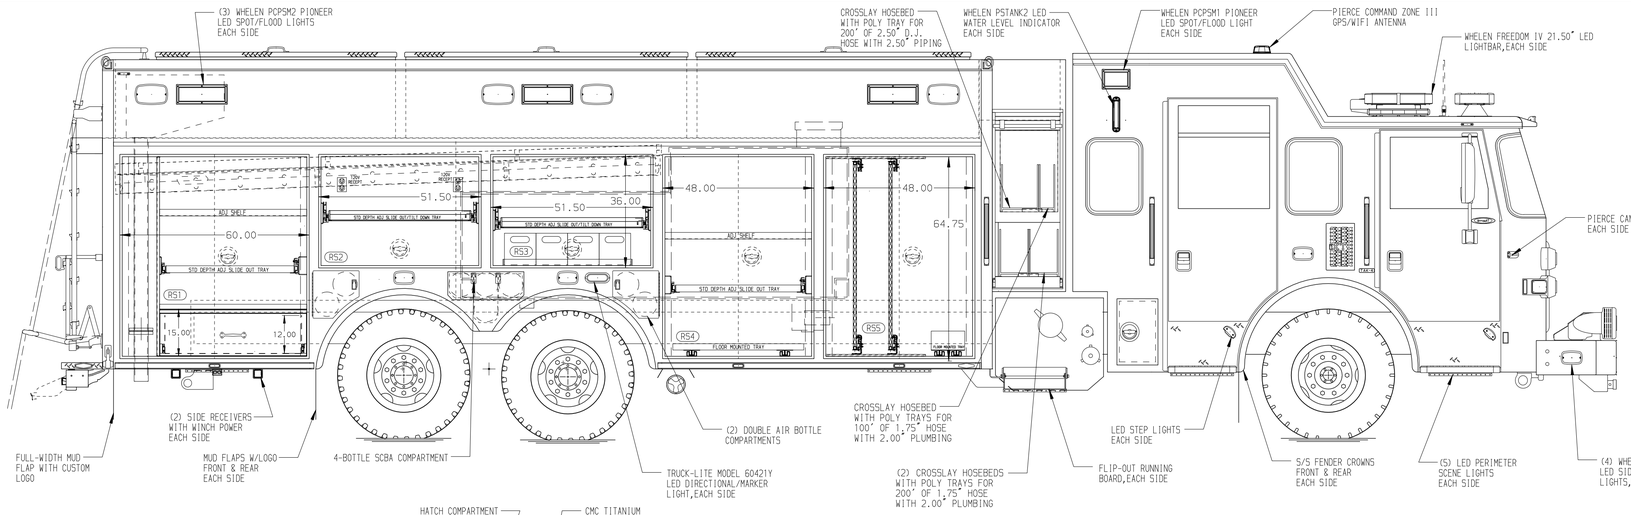

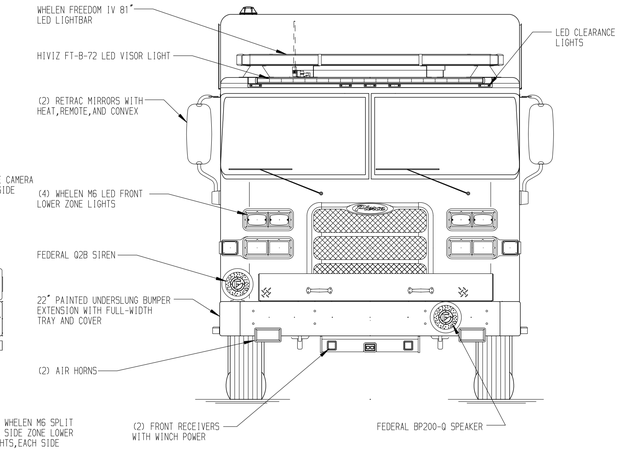

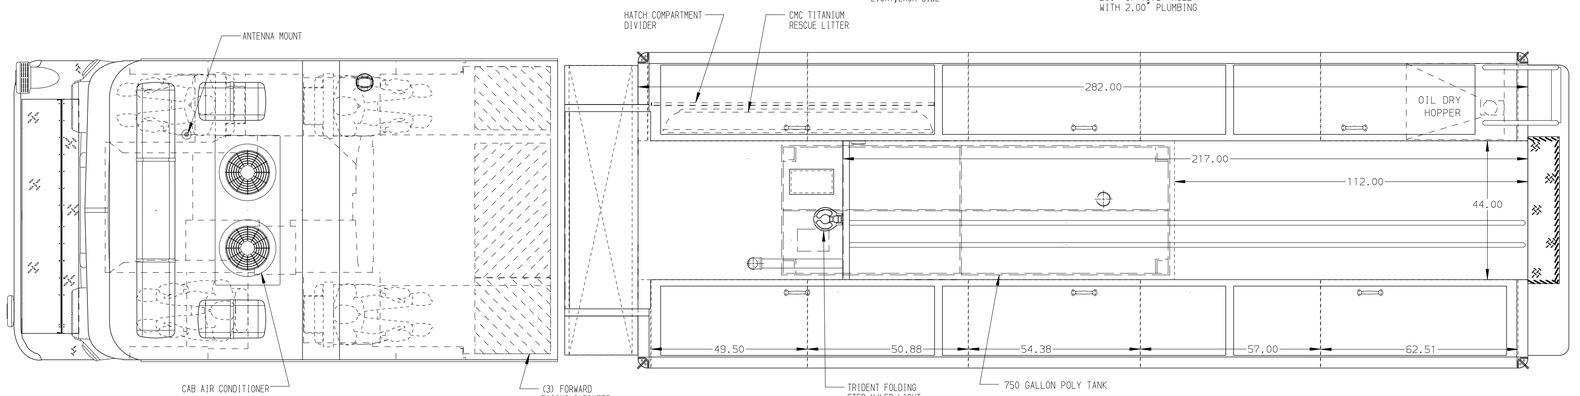

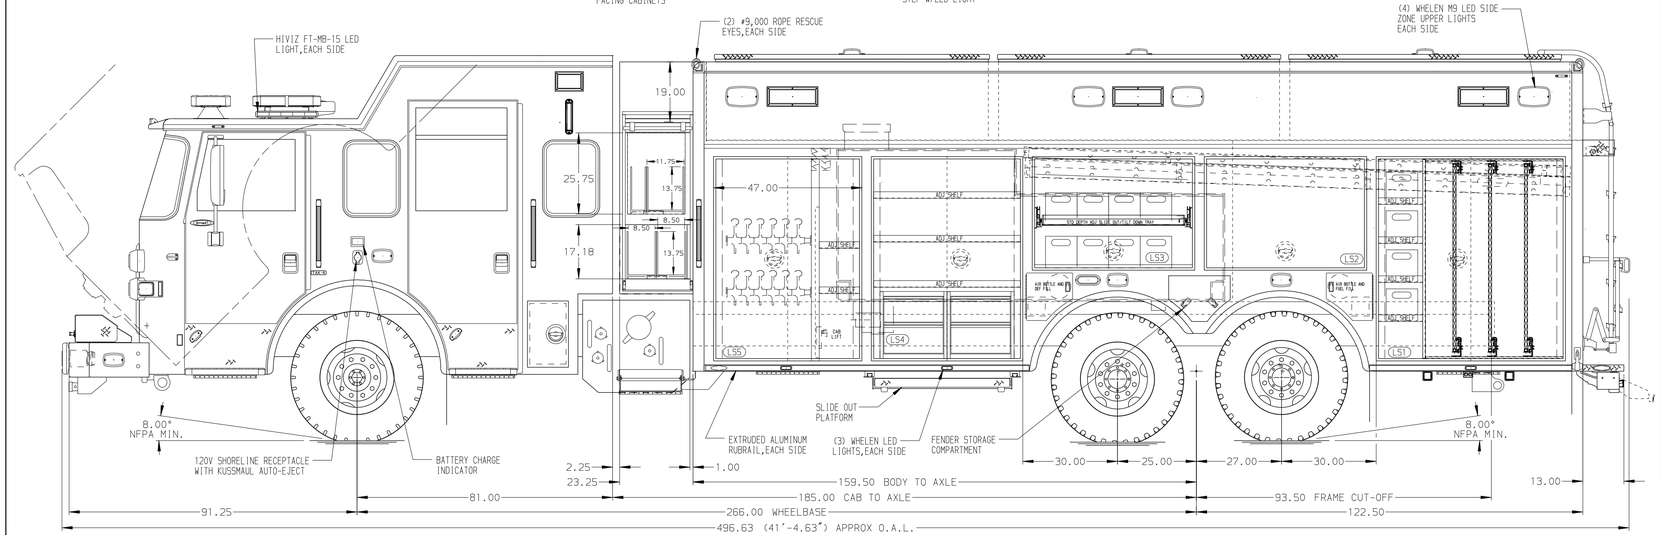

REAR COMPARTMENT CONTAINS THE FOLLOWING:

COMPARTMENT B1 CONTAINS:
- (1) RACK FOR THE FOLLOWING:
  - (8) PIKE POLES
  - (1) 24'2-SECTION LADDER
  - (1) 14' ROOF LADDER
  - (1) 10' FOLDING LADDER
- (1) 106"DP FLOOR MOUNTED SLIDE OUT TRAY WITH TOOL BOARD
- (1) STD DEPTH FLOOR MOUNTED TRAY WITH SIDE SLIDES
- (1) HORIZONTAL FLOOR EXTENSION
-
-
-

HOSEBED CAPACITY

1. 300' OF 2.50" HOSE (PRE-CONNECT)
2. 300' OF 2.50" HOSE (DEAD LAY)
3. 1000' OF 5.00" HOSE

LEFT SIDE COMPARTMENTS CONTAIN THE FOLLOWING:

COMPARTMENT LS1 CONTAINS:
- (1) VERTICAL PEGBOARD DIVIDER
- (4) STD DEPTH ADJ SHELVES
- (3) STD DEPTH ADJ SLIDE OUT TOOLBOARDS
- (4) POLY TOOL BOXES
- PEGBOARD ON RIGHT SIDE BODY WALL
-
-
-
-
-

COMPARTMENT LS2 CONTAINS:
-
-
-

COMPARTMENT LS3 CONTAINS:
- (1) STD DEPTH ADJ SLIDE OUT/TILT TRAY
- (8) POLY TOOL BOXES
-

COMPARTMENT LS4 CONTAINS:
- (3) STD DEPTH ADJ SHELVES
- (2) 2-DRAWER CTECH CABINETS
-

COMPARTMENT LS5 CONTAINS:
- (1) CAB LIFT CONTROLLER
- (1) KUSSMAUL 1200 PUMP PLUS CHARGER
- PEGBOARD ON RIGHT SIDE BODY WALL
- (2) STD DEPTH ADJ SHELVES

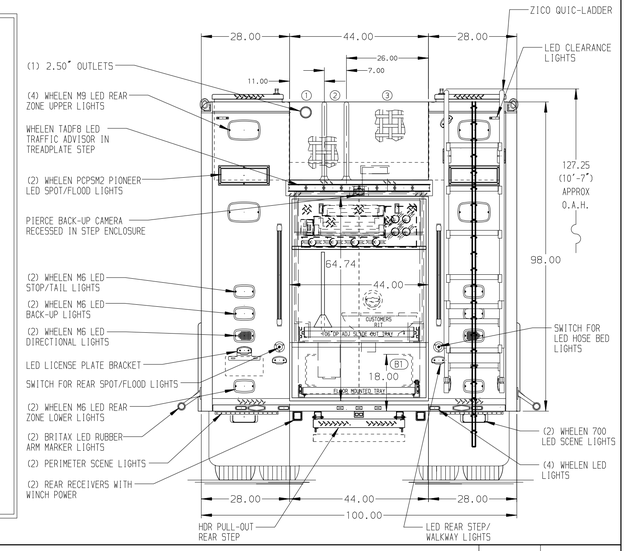

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

NOTES:
1. PIERCE 1500 GPM PUC STYLE PUMP
2. WARN #10,000 PORTABLE RECEIVER STYLE WINCH
3. PAIR OF FOLDING WHEEL CHOCKS SHIPPED LOOSE
4. POLISHED S/S SCUFFPLATES ON CAB AND CREW CAB DOOR JAMBS
5. FLOOR IN CAB AND CREW CAB TO BE ALUMINUM TREADPLATE
6. DUAL LED STRIP LIGHTS ON EACH SIDE OF THE HOSEBED
7. BRUSHED S/S SCUFFPLATES ON BODY DOOR PANS
8. PULL STRAPS IN COMPARTMENTS LS2,LS3,RS2,RS3, AND SPEED LAY DOORS
9. PIERCE LED LIGHTS IN ALL BODY AND HATCH COMPARTMENTS
10. 15A,120V 6-PLACE RECEPTACLE LOCATED IN CENTER CAB COMPARTMENT
11. NARCOTICS CABINET LOCATED IN THE FORWARD FACING CREW CAB COMPARTMENT
12. 15/20A,120V DUPLEX RECEPTACLE LOCATED IN LS AND RS EMS CABINETS

NOTE:
LAP DOORS HAVE BEEN SHOWN IN HIDDEN LINES TO CLEARLY IDENTIFY THE EQUIPMENT IN EACH COMPARTMENT. DASHED LINES ON SIDES ARE DOORS IN OPEN POSITION

CLEAR DOOR WIDTH KEY

AMDOR ROLL UP DOORS:	-2 1/4"
GORTITE ROLL UP DOORS:	-2 1/2"
PIERCE DOUBLE LAP DOORS:	-4 1/4"
PIERCE LIFT-UP LAP DOORS:	-1 1/2"

(EX: 60"F-F - 2 1/4"= 57 3/4" CLEAR)
(F-F)= FRAME TO FRAME

REV	DATE	BY	CH
1	21DEC22	DHE	CDK
2	11NOV22	DHE	AZU
3	18AUG22	DHE	AZU

CHASSIS DATA
MAKE: PIERCE
MODEL: AX8120
DWG NO.: 37615AD

Pierce MANUFACTURING INC.

TITLE: HEAVY DUTY RESCUE
NON-WALKIN/PUC 750 GALLON WATER
FOR: HANAHAN FIRE DEPARTMENT
BID # 658 COKER, LEON (TREY)

JOB NO.	37615
SCALE	1:24
DATE	
DRAWN BY	DHE
DATE	06JUL22
CHECKED BY	CDK
DATE	08JUL22
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 22-DEC-2022 10:40:06