
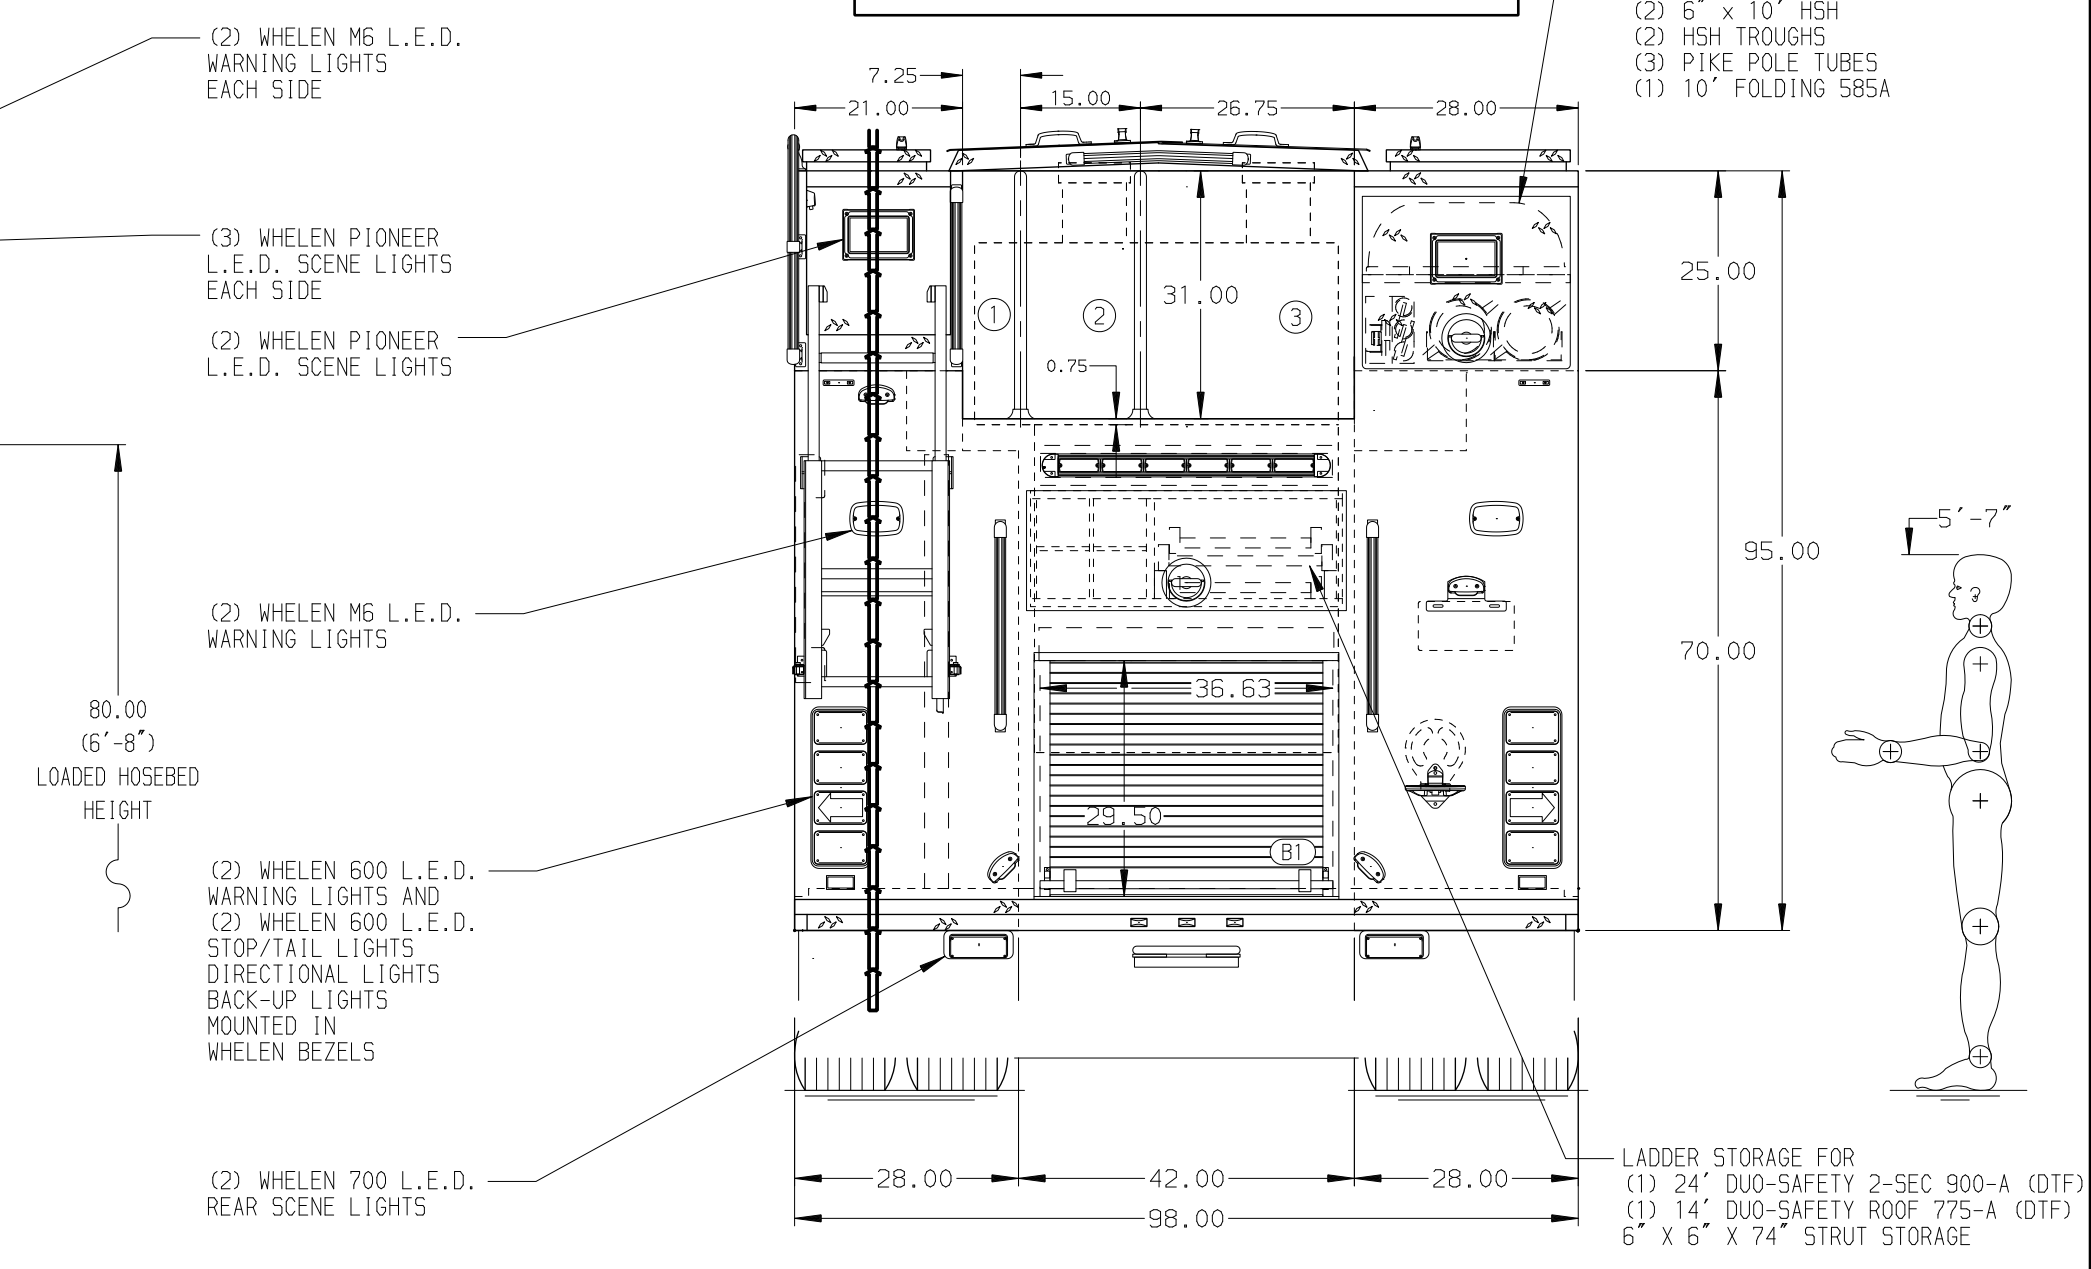


BODY Pumper, HDRP, Aluminum	WATER TANK 1000 Gallon Poly Water Tank
COMPT, LEFT SIDE 189" RollUp Full Height & Depth Front & Rear	Foam System Husky 12 Dual Agent Foam System
COMPT, RIGHT SIDE 189" RollUp Full Height & Depth Front & Rear	Foam Cell 20 & 50 Gallon Foam Cell, Reduced Water
COMPT, REAR 29.50" FF RollUp Rear Compt w/Tailboard	

HOSEBED CAPACITY	
BED 1	650' OF 1.75" D.J. POLY HOSE
BED 2	800' OF 2.50" D.J. POLY HOSE
BED 3	1150' OF 4.00" D.J. POLY HOSE

STORAGE COMPARTMENT FOR:
STOKES BASKET 84.0" X 25.0" X 9.00"
(2) 6" x 10" HSH
(2) HSH TROUGHS
(3) PIKE POLE TUBES
(1) 10" FOLDING 585A

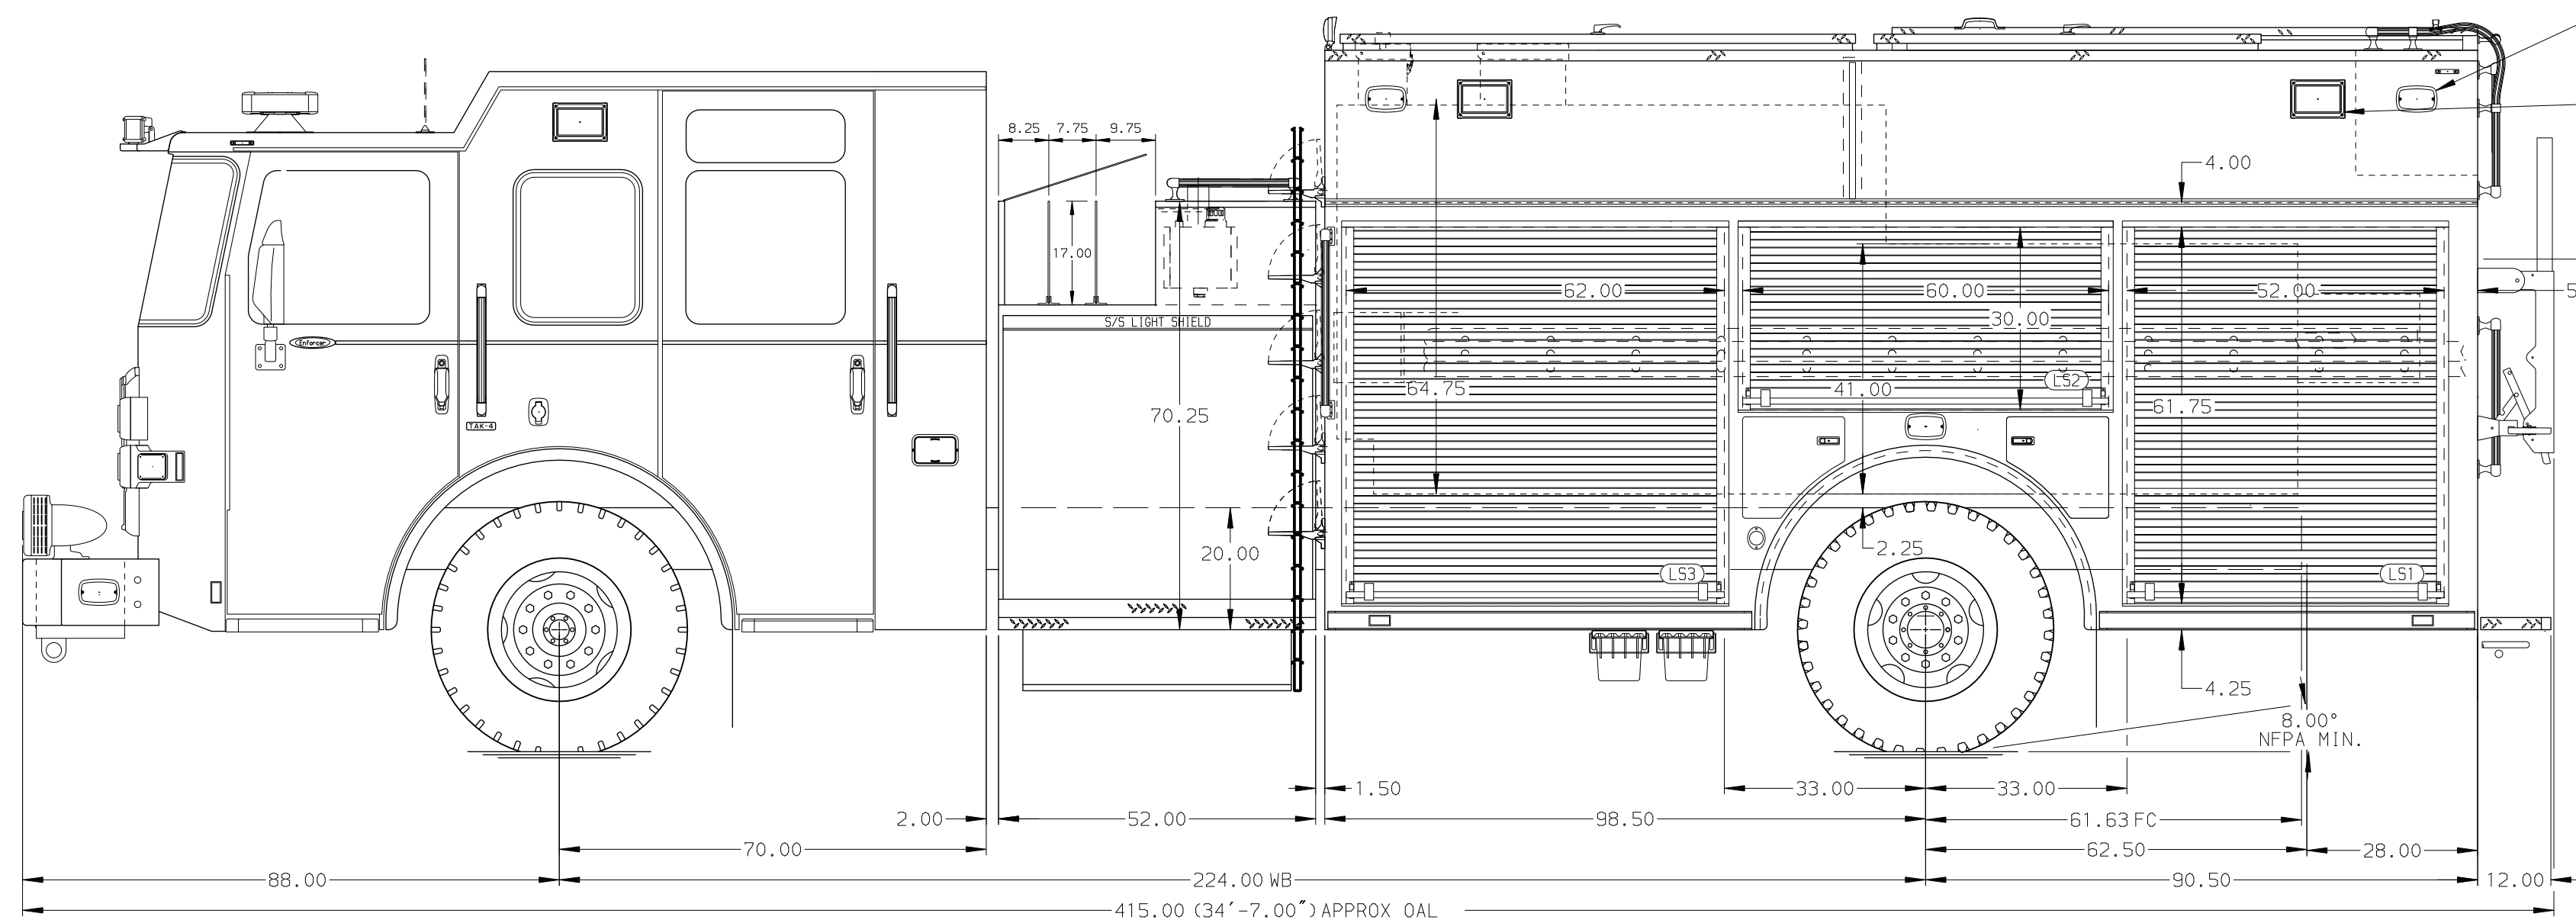

CHASSIS Enforcer Chassis	CAB 7010 Enforcer Cab	AXLE, FRONT, CUSTOM 20,050 Lb TAK-4 Axle	TRANSMISSION Allison 5th Gen, 3000 EV5 P	PUMPHOUSE 52" Control Zone Side Mount PUMP	CROSSLAYS, 1.50" (2) 1.50" Standard Capacity	SPEEDLAYS Speedlays Not Required	SAFETY Side Roll and Frontal Impact Protection
ENGINE 450 HP Cummins L9 Engine	BUMPER 19" Extended Painted Steel	AXLE, REAR 27,000 Lb Dana Axle		PUMP 2000 GPM Waterous CSU	CROSSLAYS, 2.50" (1) 2.50" Standard Capacity	GENERATOR ONAN 6KW	

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER

REV	DATE	BY	CH	ENFORCER
16NOV21	MMF	JJR		CHASSIS DATA
04NOV21	MMF	JJR		MAKE
29SEP21	MMF	JJR		PIERCE
20AUG21	MMF	JJR		MODEL
17AUG21	MMF	JJR		

		JOB NO.	36720
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	MMF
FOR	Orangeville Fire Department	CHECKED BY	COL
DWG NO.	36720AD-SH1	SHEET SIZE	SHEET NO.
		D	1 OF 2