
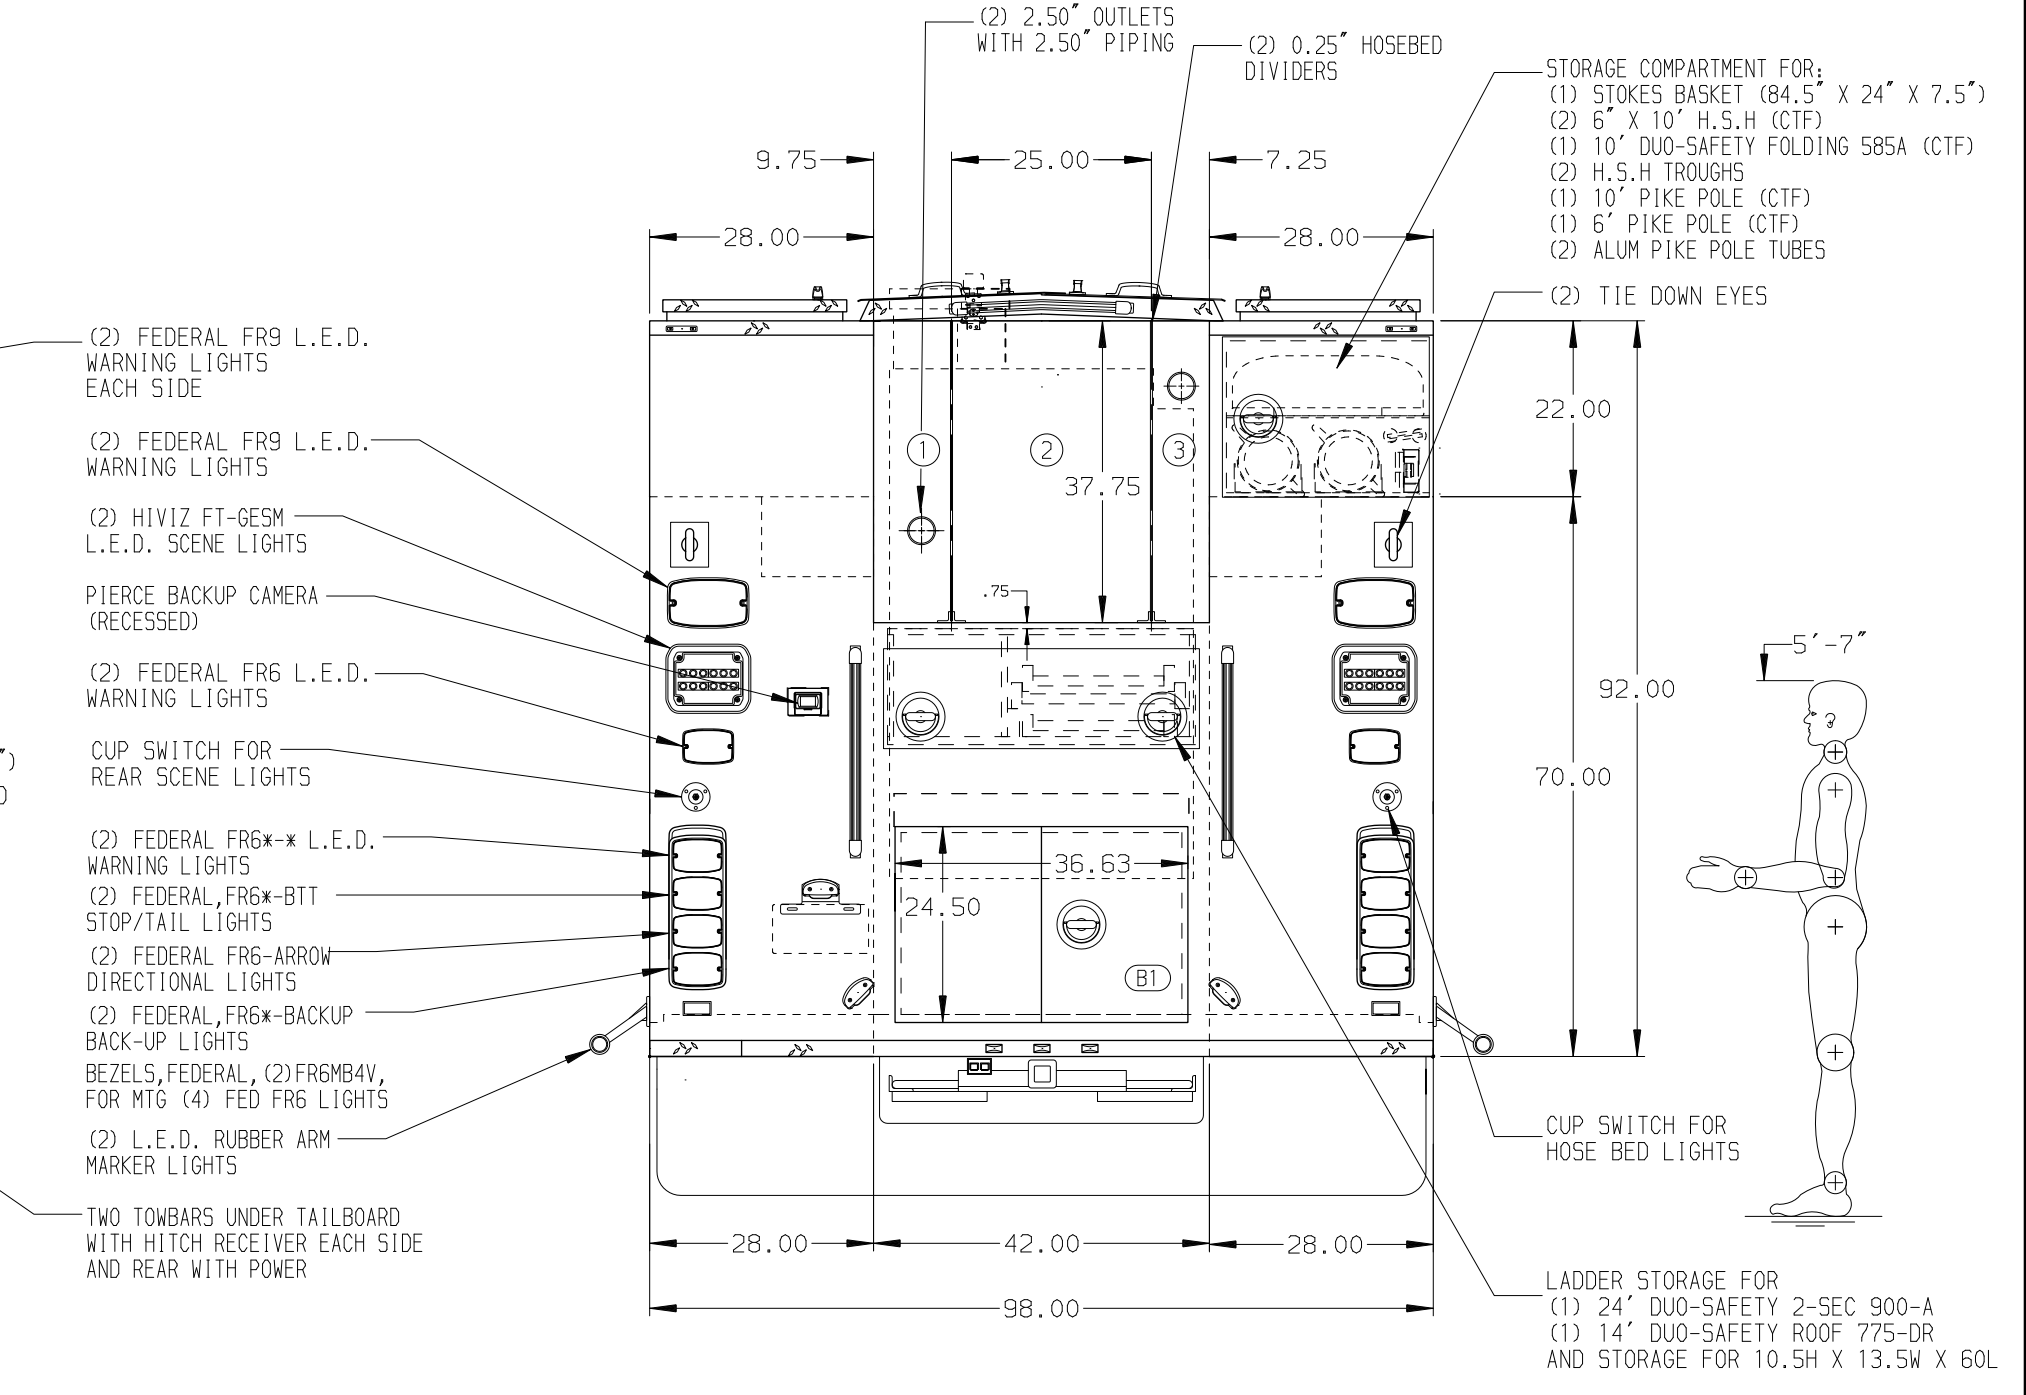


- HOSEBED CAPACITIES
- ① 400' OF 2.50" MERCEDES AQUAFLOW HOSE
 - ② 1500' OF 5.00" MERCEDES MEGAFLOW HOSE
 - ③ 500' OF 3.00" MERCEDES AQUAFLOW HOSE

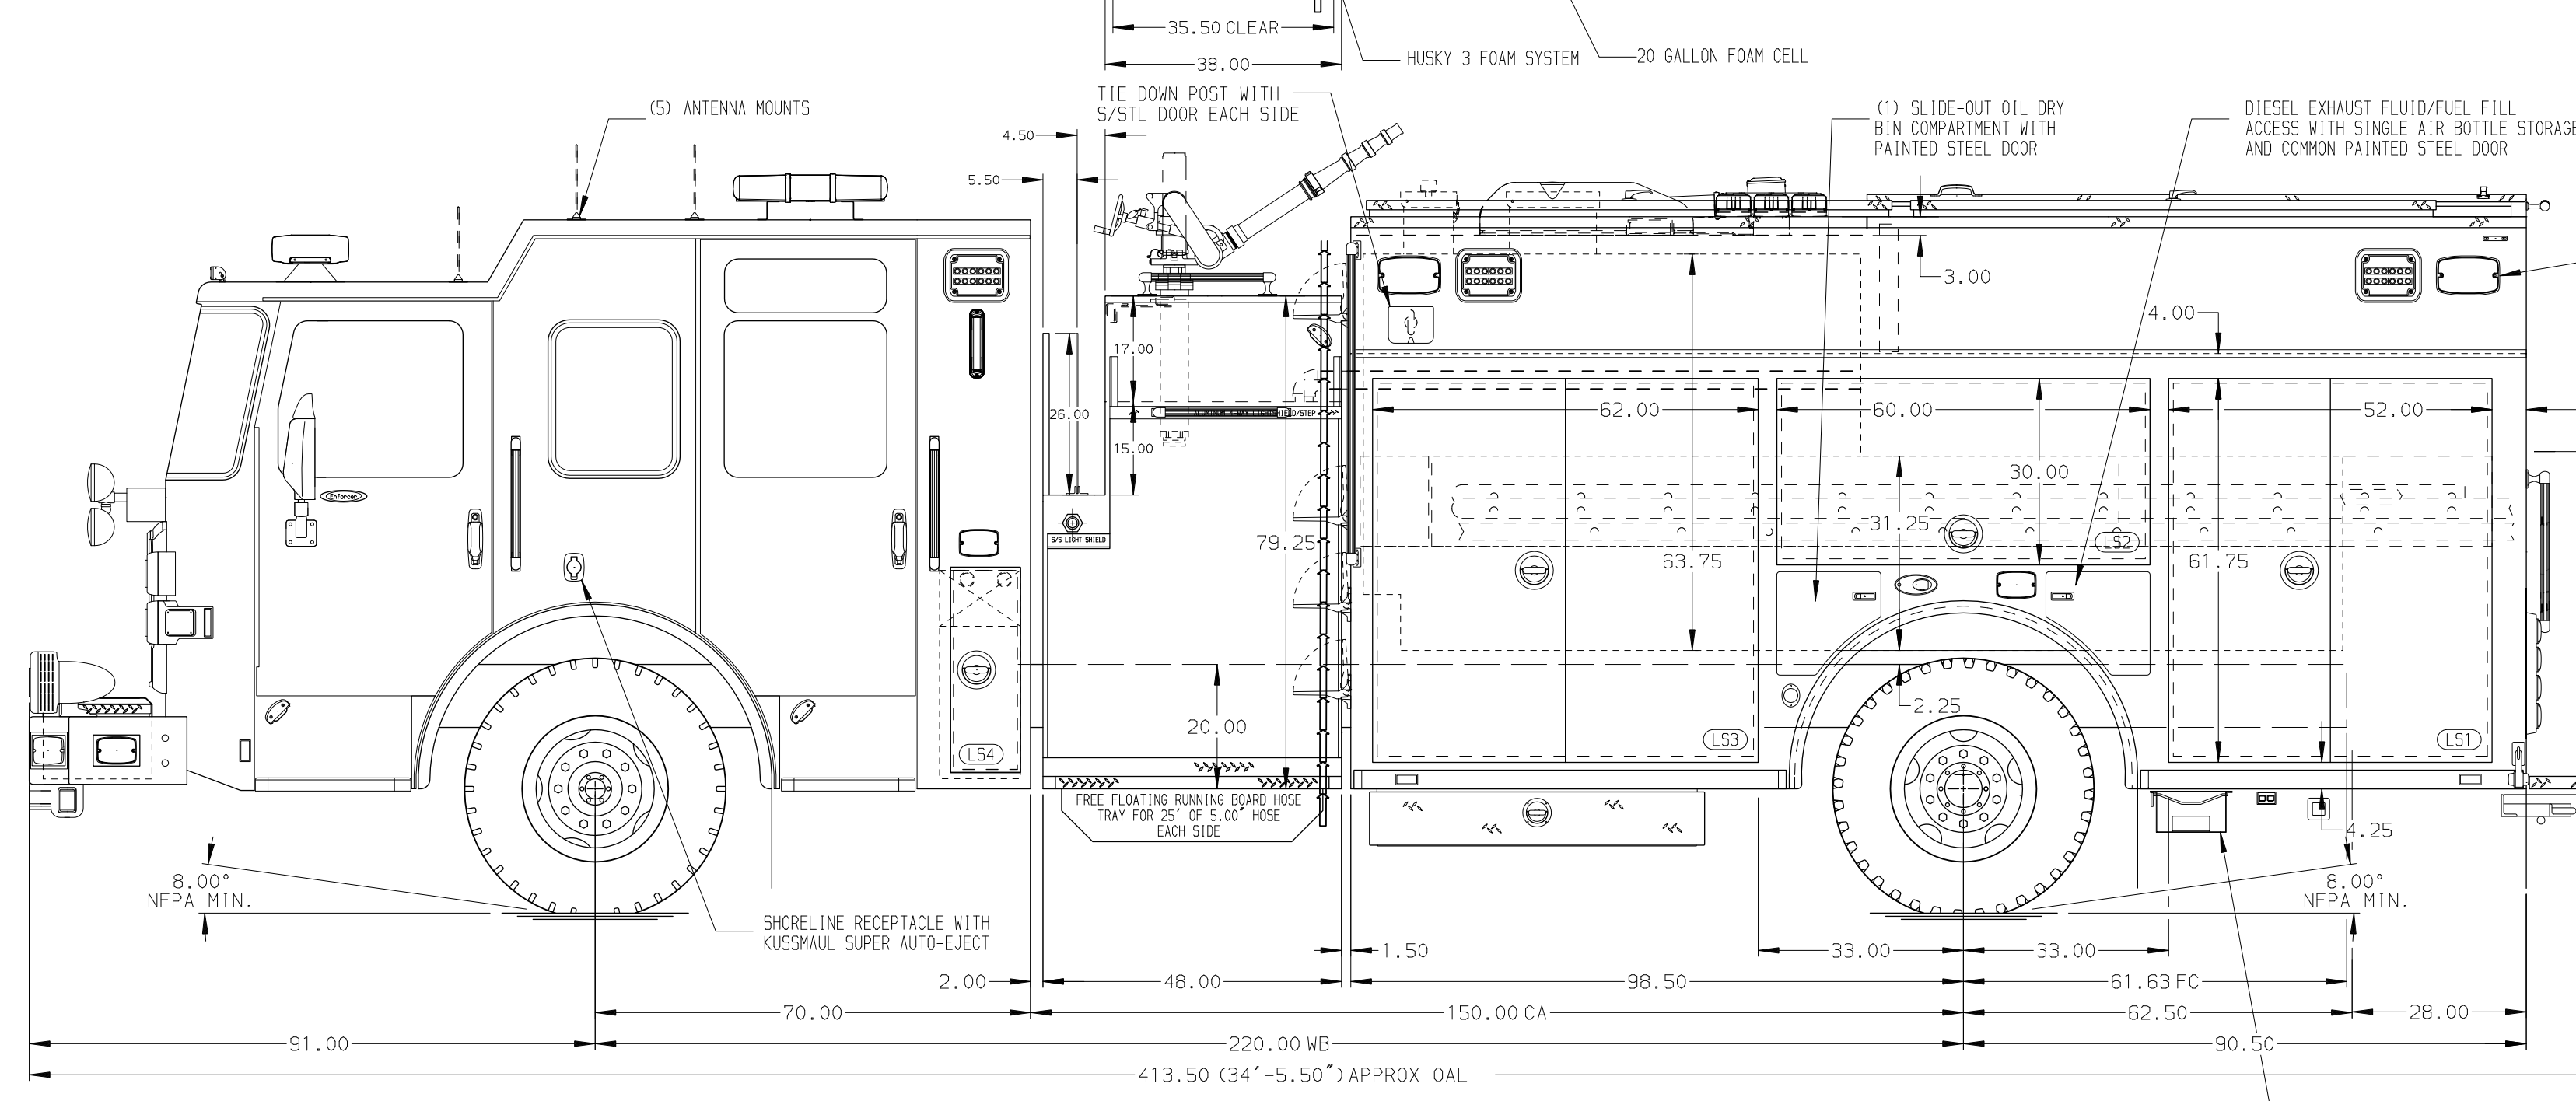

ALUMINUM BODY MAXIMUM O.A.H. 120.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. ONE 3000# WARN PORTABLE RECEIVER TYPE WINCH
3. (2) PIKE POLE TUBES LOCATED IN TRANSVERSE COMPARTMENT
4. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
5. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
6. BRUSHED STAINLESS STEEL SCUFFPLATE INSIDE EACH BODY COMPARTMENT DOOR
7. AIR INLET WITH DISCONNECT COUPLING LOCATED ON DRIVER SIDE PUMP PANEL

CUSTOMER APPROVAL	
APPROVED BY:	
DATE:	
REV	DATE
	15NOV21
	JUS
	CDU
	CH
	ENFORCER

		JOB NO.	36721
		SCALE	1:24
TITLE 1500-D-770P, 750 GAL OF WATER W/ 20 GAL FOAM CELL 189" HGRP BODY, LADDERS THRU TANK, (3) X-LAYS	MAKE PIERCE	FOR	RADNOR FIRE COMPANY WAYNE, PA
		DWG NO.	36721AD-SH1
		CHECKED BY	EGO
		SHEET SIZE	D
		SHEET NO.	1 OF 2