

Pumper, PUC
BODY

Pumper, PUC, Aluminum

CHASSIS

Enforcer Chassis, PUC

CHASSIS
AXLE, FRONT, CUSTOM

18,000 Lb TAK-4 Axle

AXLE, REAR

31,000 Lb Meritor Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

19" Extended Stainless Steel

CAB

7010 Enforcer Cab, PUC

BODY

WATER TANK

1000 Gallon Poly Water Tank

COMPT, PUMPER, REAR

40.50" FF RollUp Rear Compt w/Tailboard, PUC

COMPT, PUMPER, LEFT SIDE

189" RollUp Full Height & Depth Front & Rear, PUC

COMPT, PUMPER, RIGHT SIDE

189" RollUp Full Height & Depth Front & Rear, PUC

FIRE SUPPRESSION
PUMPHOUSE

Control Zone, PUC

PUMP

1500 GPM Pierce PUC

CROSSLAYS, 1.50"

(2) 1.50", Poly Trays, 200"

CROSSLAYS, 2.50"

(1) 2.50", Poly Tray, 200"

GENERATOR


Generator Not Required

Foam System

Husky 3 Single Agent Foam System

Foam Cell

30 Gallon Foam Cell, Not Reduced Water, PUC

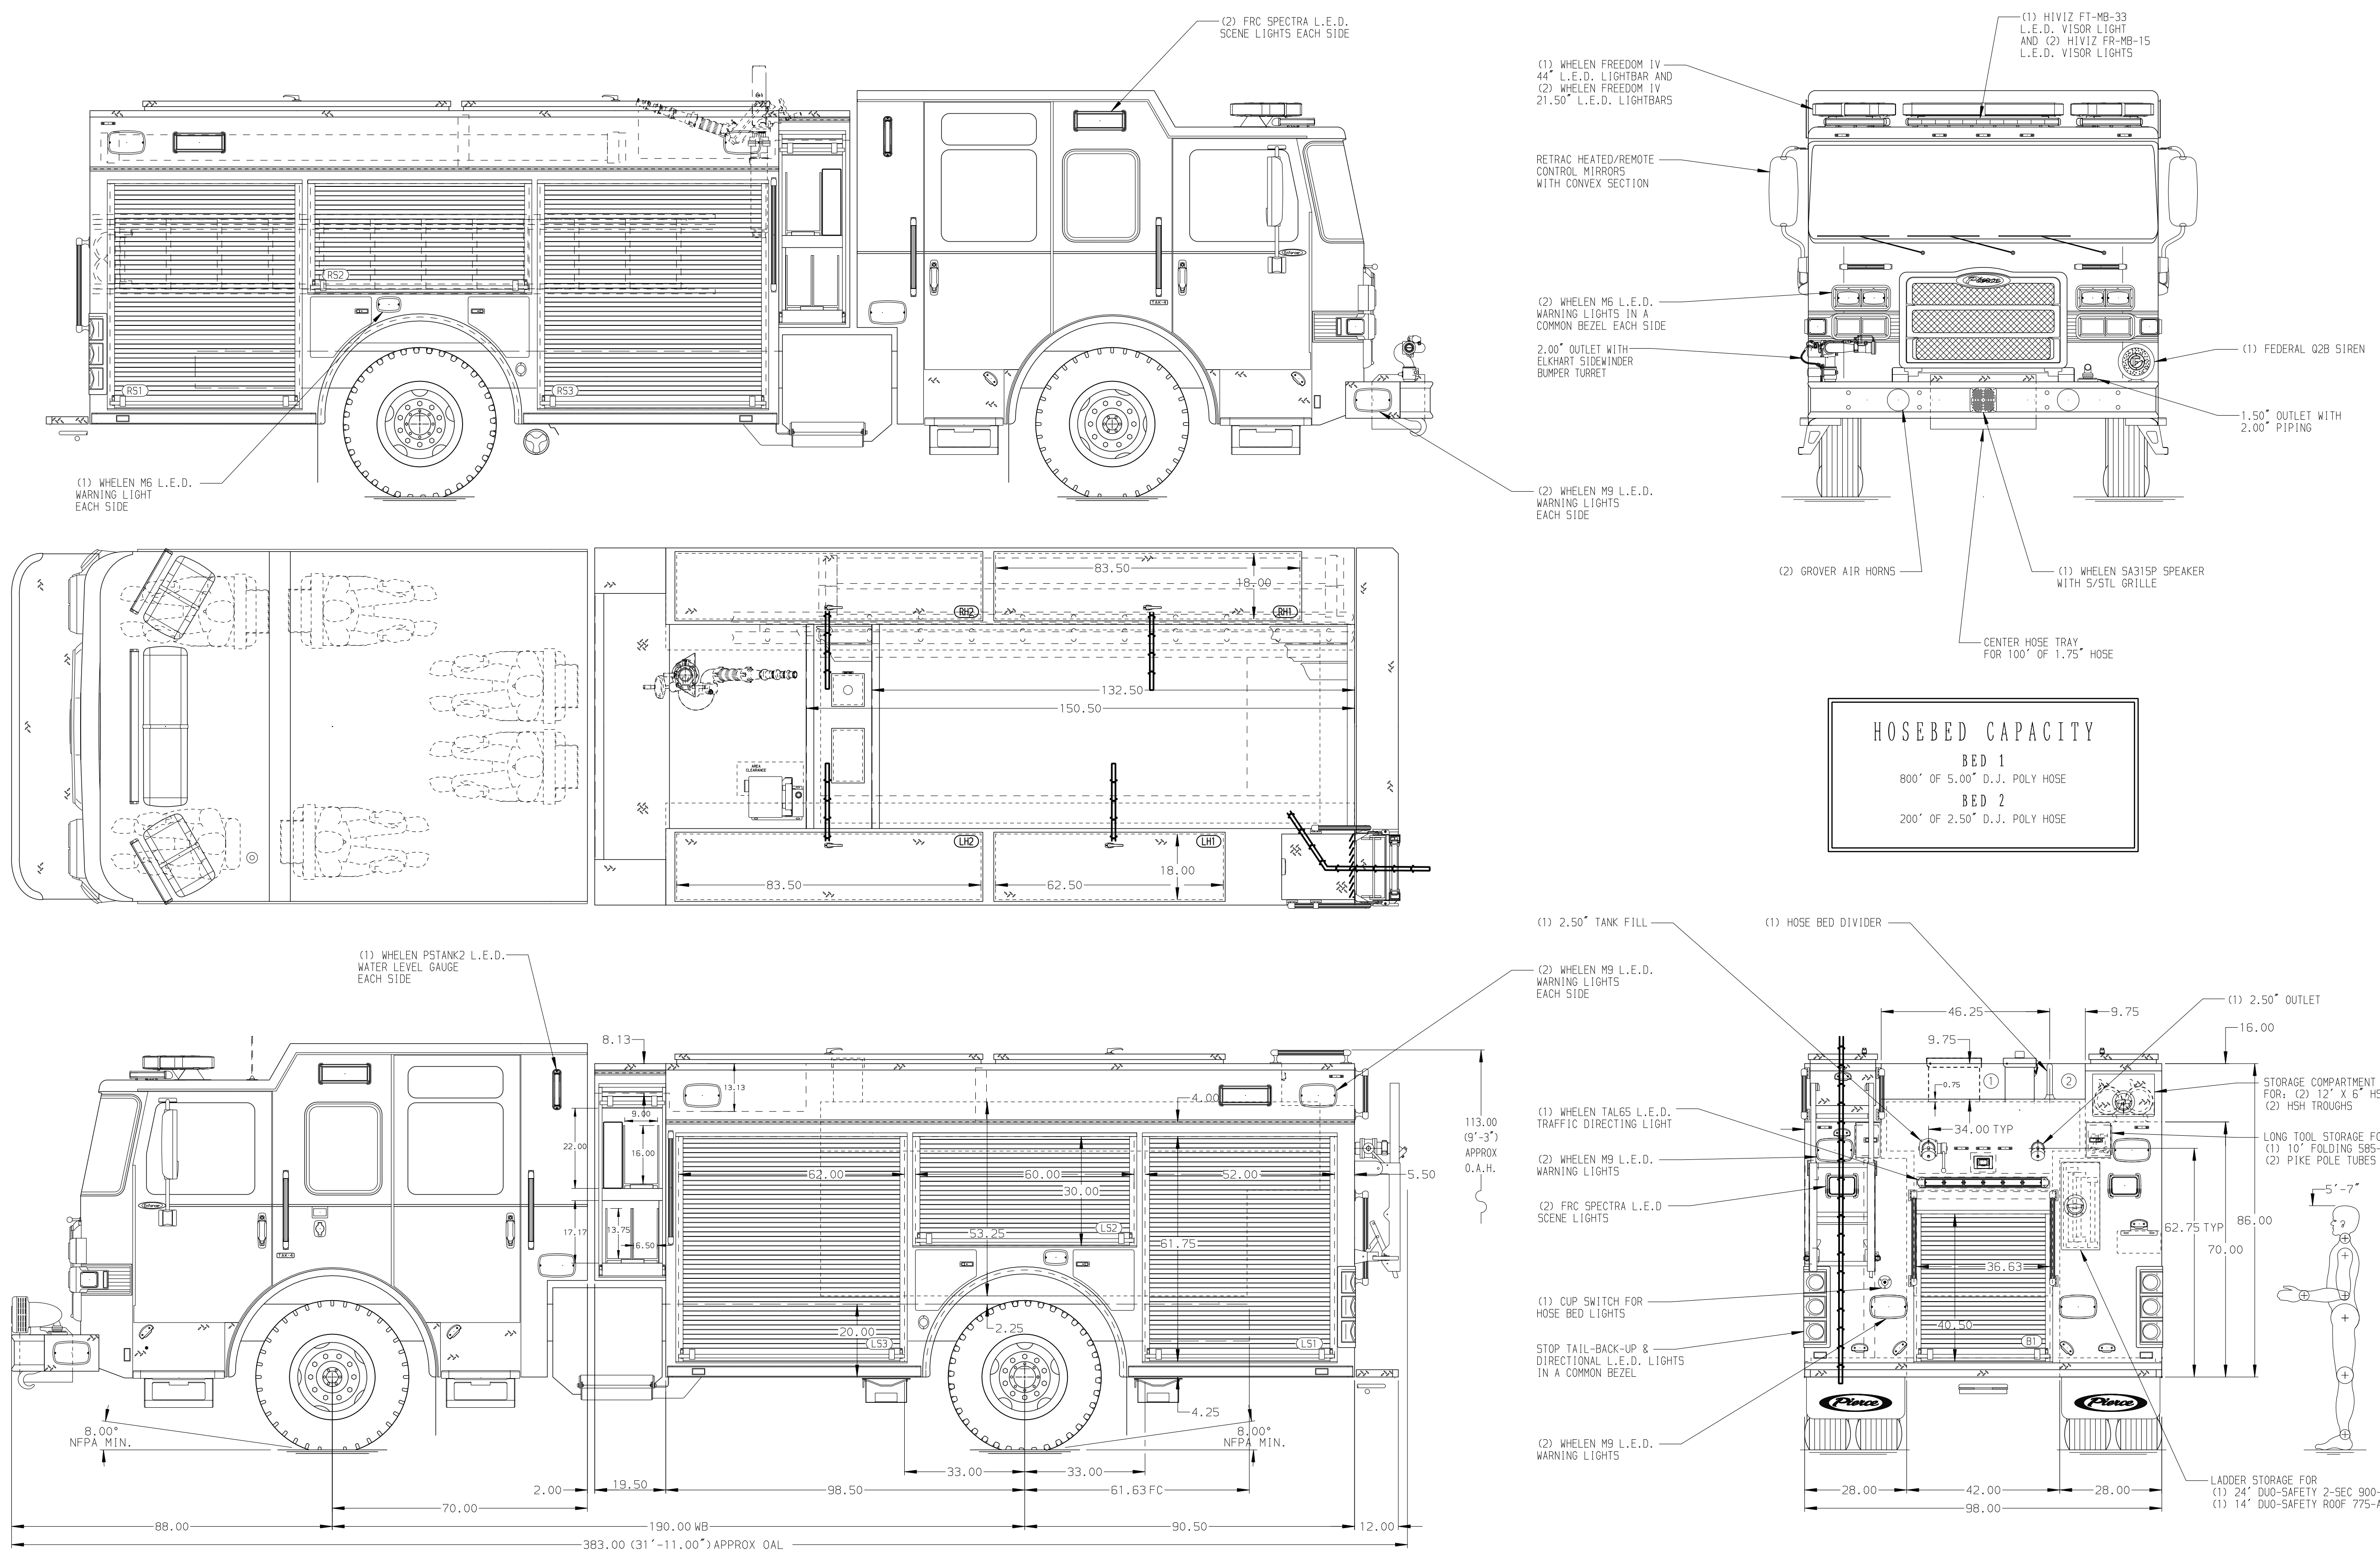

HOSEBED CAPACITY	
BED 1	800' OF 5.00" D.J. POLY HOSE
BED 2	200' OF 2.50" D.J. POLY HOSE

MAXIMUM O.A.H. 114.00"

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPMELL
3. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
4. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF THE CAB
5. TWO ADJUSTABLE SHELVES LOCATED PER ORDER
6. FIVE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
7. FOUR TILTING/SLIDE-OUT TRAYS LOCATED PER ORDER
8. TWO SLIDE-OUT TOOLBOARDS LOCATED PER ORDER
9. ONE SWING-OUT TOOLBOARD LOCATED PER ORDER
10. ONE VERTICAL PARTITION LOCATED PER ORDER

CUSTOMER APPROVAL

APPROVED BY: _____
DATE: _____



JOB NO. 38068

SCALE 1:24 DATE

REV	DATE	BY	CH	ENFORCER
-	-	-	-	-

TITLE	FOR	DWG NO.
Pierce Pumper Approval Drawing	Gasport Chemical Hose Company	38068AD

DRAWN BY	CHECKED BY	SHEET SIZE	SHEET NO.
MMF	COL	D	1 OF 1