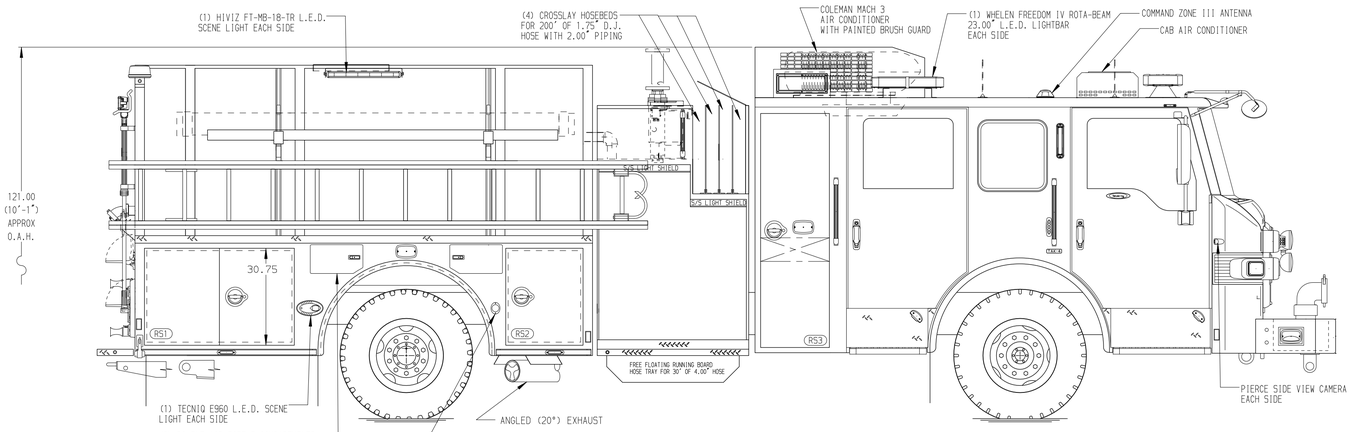

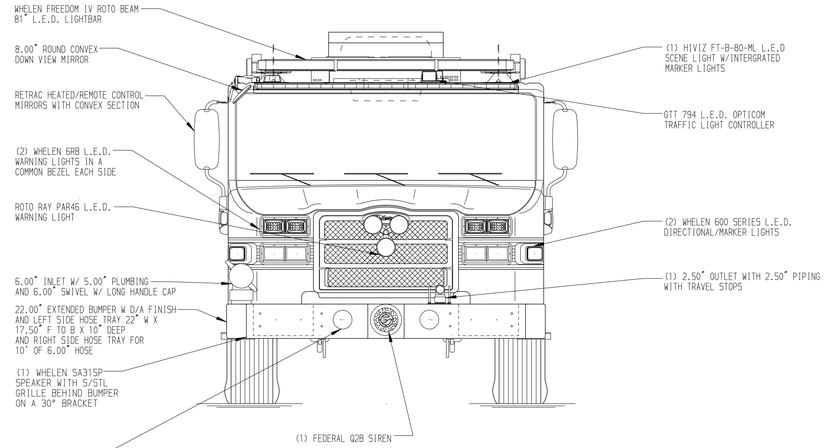

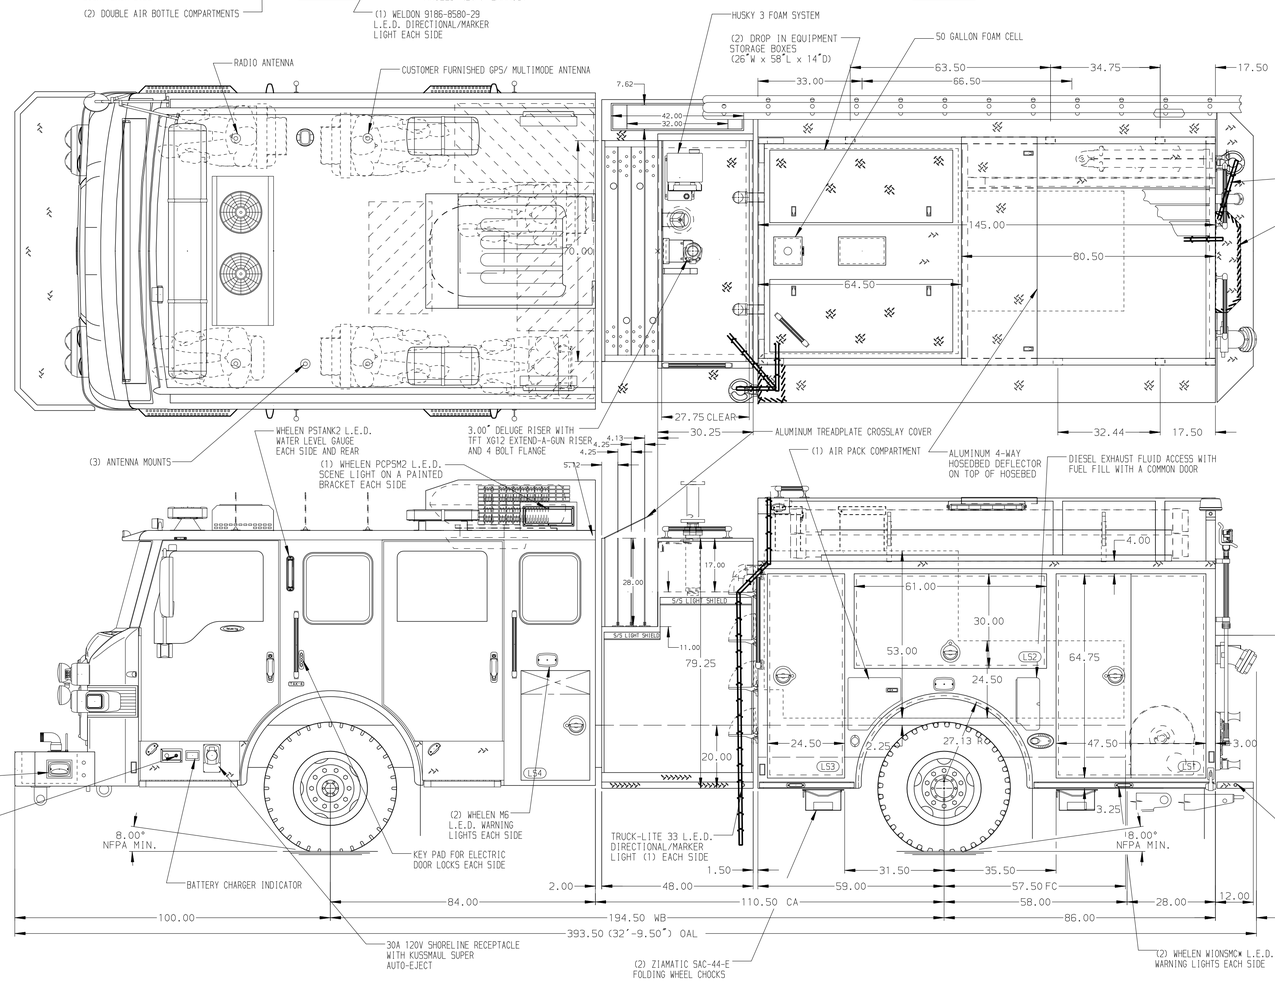

HOSEBED CAPACITIES

1. 400' OF 3.00" D.J. POLY HOSE
2. 400' OF 2.00" D.J. HOSE
3. 1100' OF 4.00" D.J. POLY HOSE
4. 250' OF 2.50" D.J. POLY HOSE
5. STORAGE FOR (1) LITTLE GIANT CLASSIC MODEL 13 LADDER AND (1) 72" X 18" X 2.50" BACKBOARD

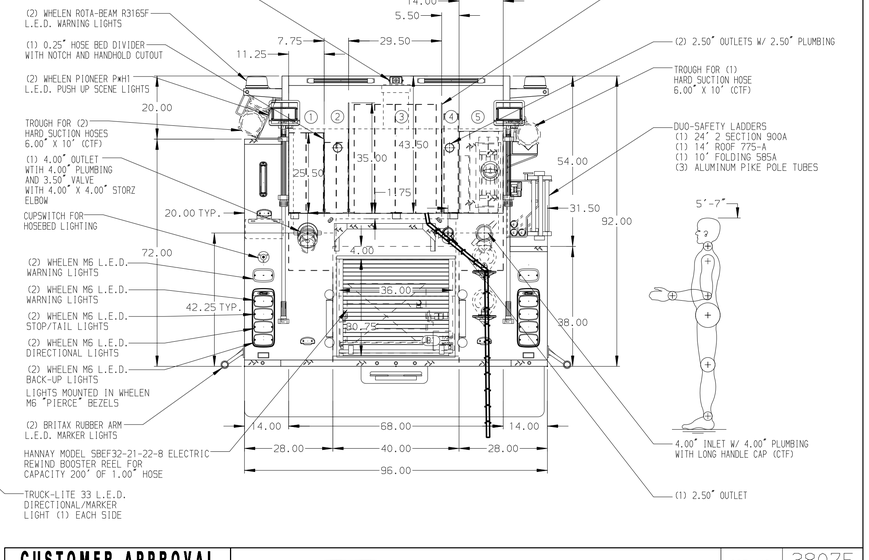

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT THE REAR
2. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
3. L.E.D. LIGHT STRIP LOCATED IN HOSE BEDS PER SHOP ORDER
4. BATTERY CHARGER LOCATED IN CAB PER SHOP ORDER
5. KEYED LOCK FOR LATCH FOR ALL SIDE BODY COMPARTMENTS
6. PULL STRAP ON DOOR IN LS2
7. REVERSED HINGED DOOR ON LS3
8. THREE FULL WIDTH/DEPTH ADJUSTABLE SHELVES WITH FRONT FLANGE DOWN LOCATED PER SHOP ORDER
9. FOUR FULL WIDTH/ DEPTH ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
10. ONE ADJUSTABLE SLIDE-OUT TRAY LOCATED PER SHOP ORDER
11. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
12. THREE PEGBOARDS MOUNTED ON THE BACK WALL LOCATED PER SHOP ORDER
13. ONE 120V 6-PLACE RECEPTACLE STRIP LOCATED IN THE CAB PER SHOP ORDER
14. ONE 120V DUPLEX RECEPTACLE LOCATED PER SHOP ORDER

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

REV	DATE	BY	CH
▽	-	-	-

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY FR

Pierce MANUFACTURING INC.

TITLE: 1500-D-800P, 750 GAL OF WATER W/ 50 GAL FOAM CELL 145" BODY, LADDER BRACKETS, (4) CROSSLAYS
FOR: STERLING VOLUNTEER FIRE COMPANY, INC. STERLING, VIRGINIA
DWG NO.: 38075AD

JOB NO.	38075 01-02
SCALE	1:24
DATE	
DRAWN BY	LST 07NOV22
CHECKED BY	NPE 18NOV22
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 21-NOV-2022 06:56:01