PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM
19,500 lb TAK-4 Axle

AXLE, REAR
24,000 lb Meritor Axle

ENGINE
500 HP Cummins X12 Engine

TRANSMISSION
Allison 6th Gen, 4000 EVS P

BUMPER
16" Extended Stainless Steel

CAB
7010 Enforcer Cab

BODY

WATER TANK
750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
152" Rollup Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE
152" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
38" Control Zone Side Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
1.50" Crosslays Not Required

CROSSLAYS, 2.50"
2.50" Crosslay Not Required

SPEEDLAYS
SpeedLays Not Required

GENERATOR
Generator Not Required

Foam System
Husky 3 Single Agent Foam System

Foam Cell
20 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

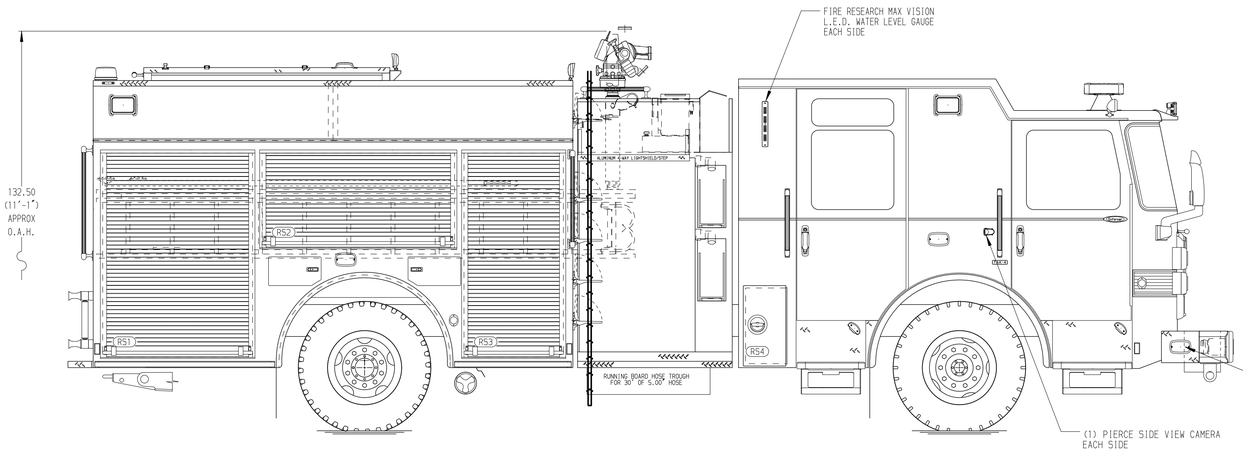

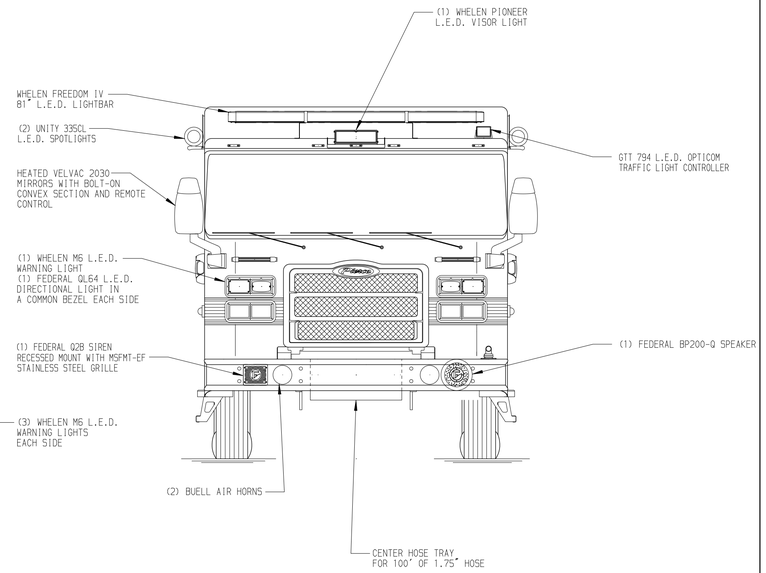

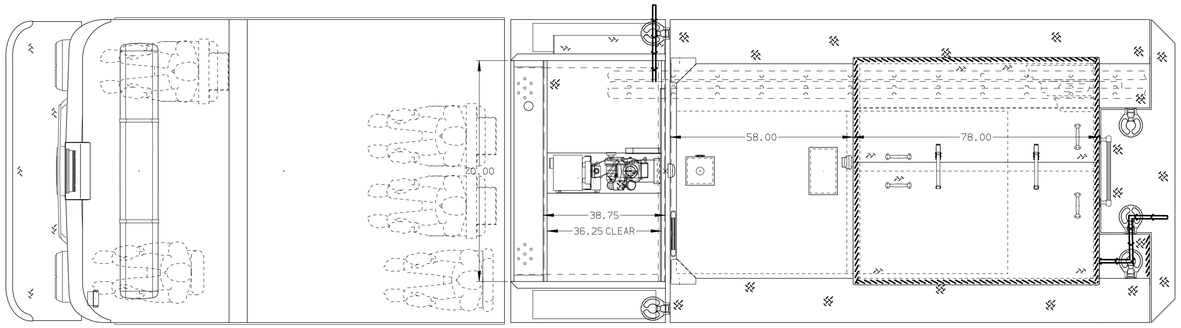

HOSEBED CAPACITY

BED 1
800' OF 3.00" D.J. POLY HOSE

BED 2
1000' OF 5.00" D.J. POLY HOSE

BED 3
OPEN

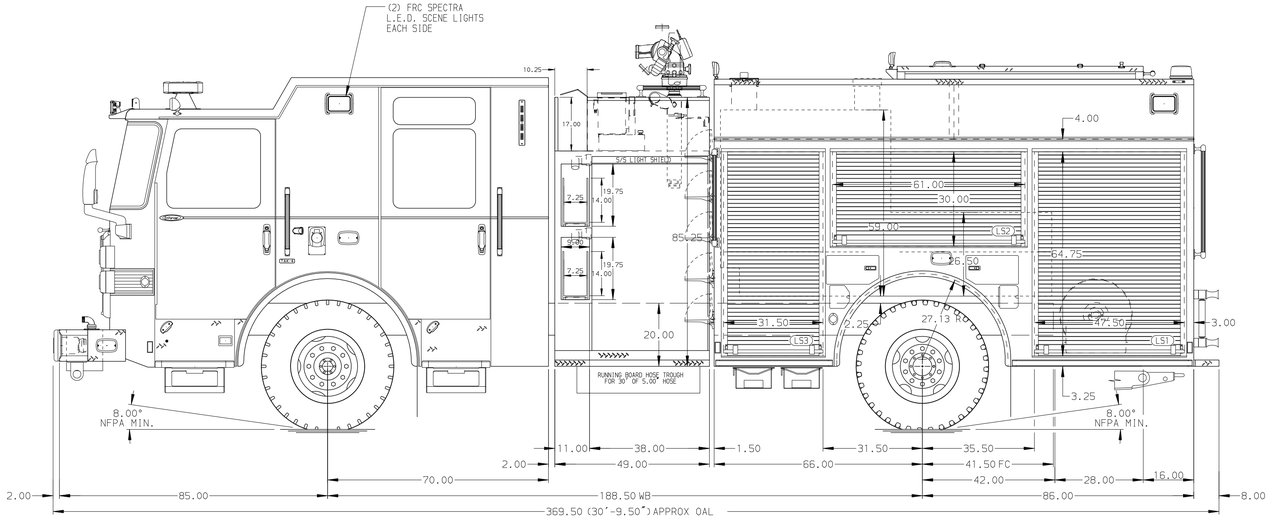

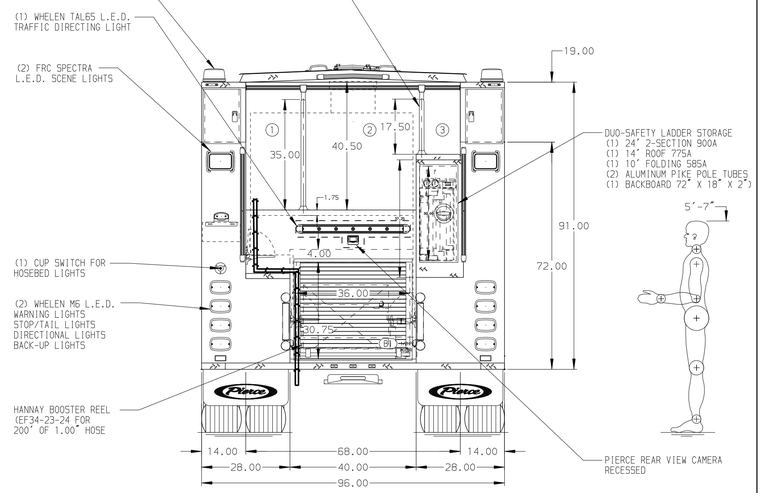

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP BUMPER LEFT SIDE
2. 30A SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. AIR OUTLET WITH SHUT OFF VALVE LOCATED DRIVER SIDE STEPWELL
6. KUSSMAUL AIR COMPRESSOR LOCATED PER SHOP ORDER
6. BATTERY CHARGE INDICATOR LOCATED DRIVER SIDE STEPWELL
7. FOUR ADJUSTABLE SHELVES LOCATED PER ORDER
8. TWO FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
9. FOUR SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
10. PAC TRAC LOCATED ON BACK WALL PER SHOP ORDER

REV	DATE	BY	CH	
V	01FEB23	MMF	DTJ	CHASSIS DATA
V	14NOV22	MMF	DTJ	MAKE
V	250CT22	COL	DTJ	PIERCE
V	060CT22	MMF	DTJ	MODEL
				ENFORCER

Pierce MANUFACTURING INC.

TITLE	Pierce Pumper Approval Drawing -	JOB NO.	38202
		SCALE	1:24
		DATE	
FOR	Shelby County Fire Department -	DRAWN BY	MMF
		DATE	30JUN22
		CHECKED BY	COL
		DATE	01JUL22
DWG NO.	38202AD	SHEET SIZE	D
		SHEET NO.	1 OF 1

View File Created 01-FEB-2023 14:58:19