
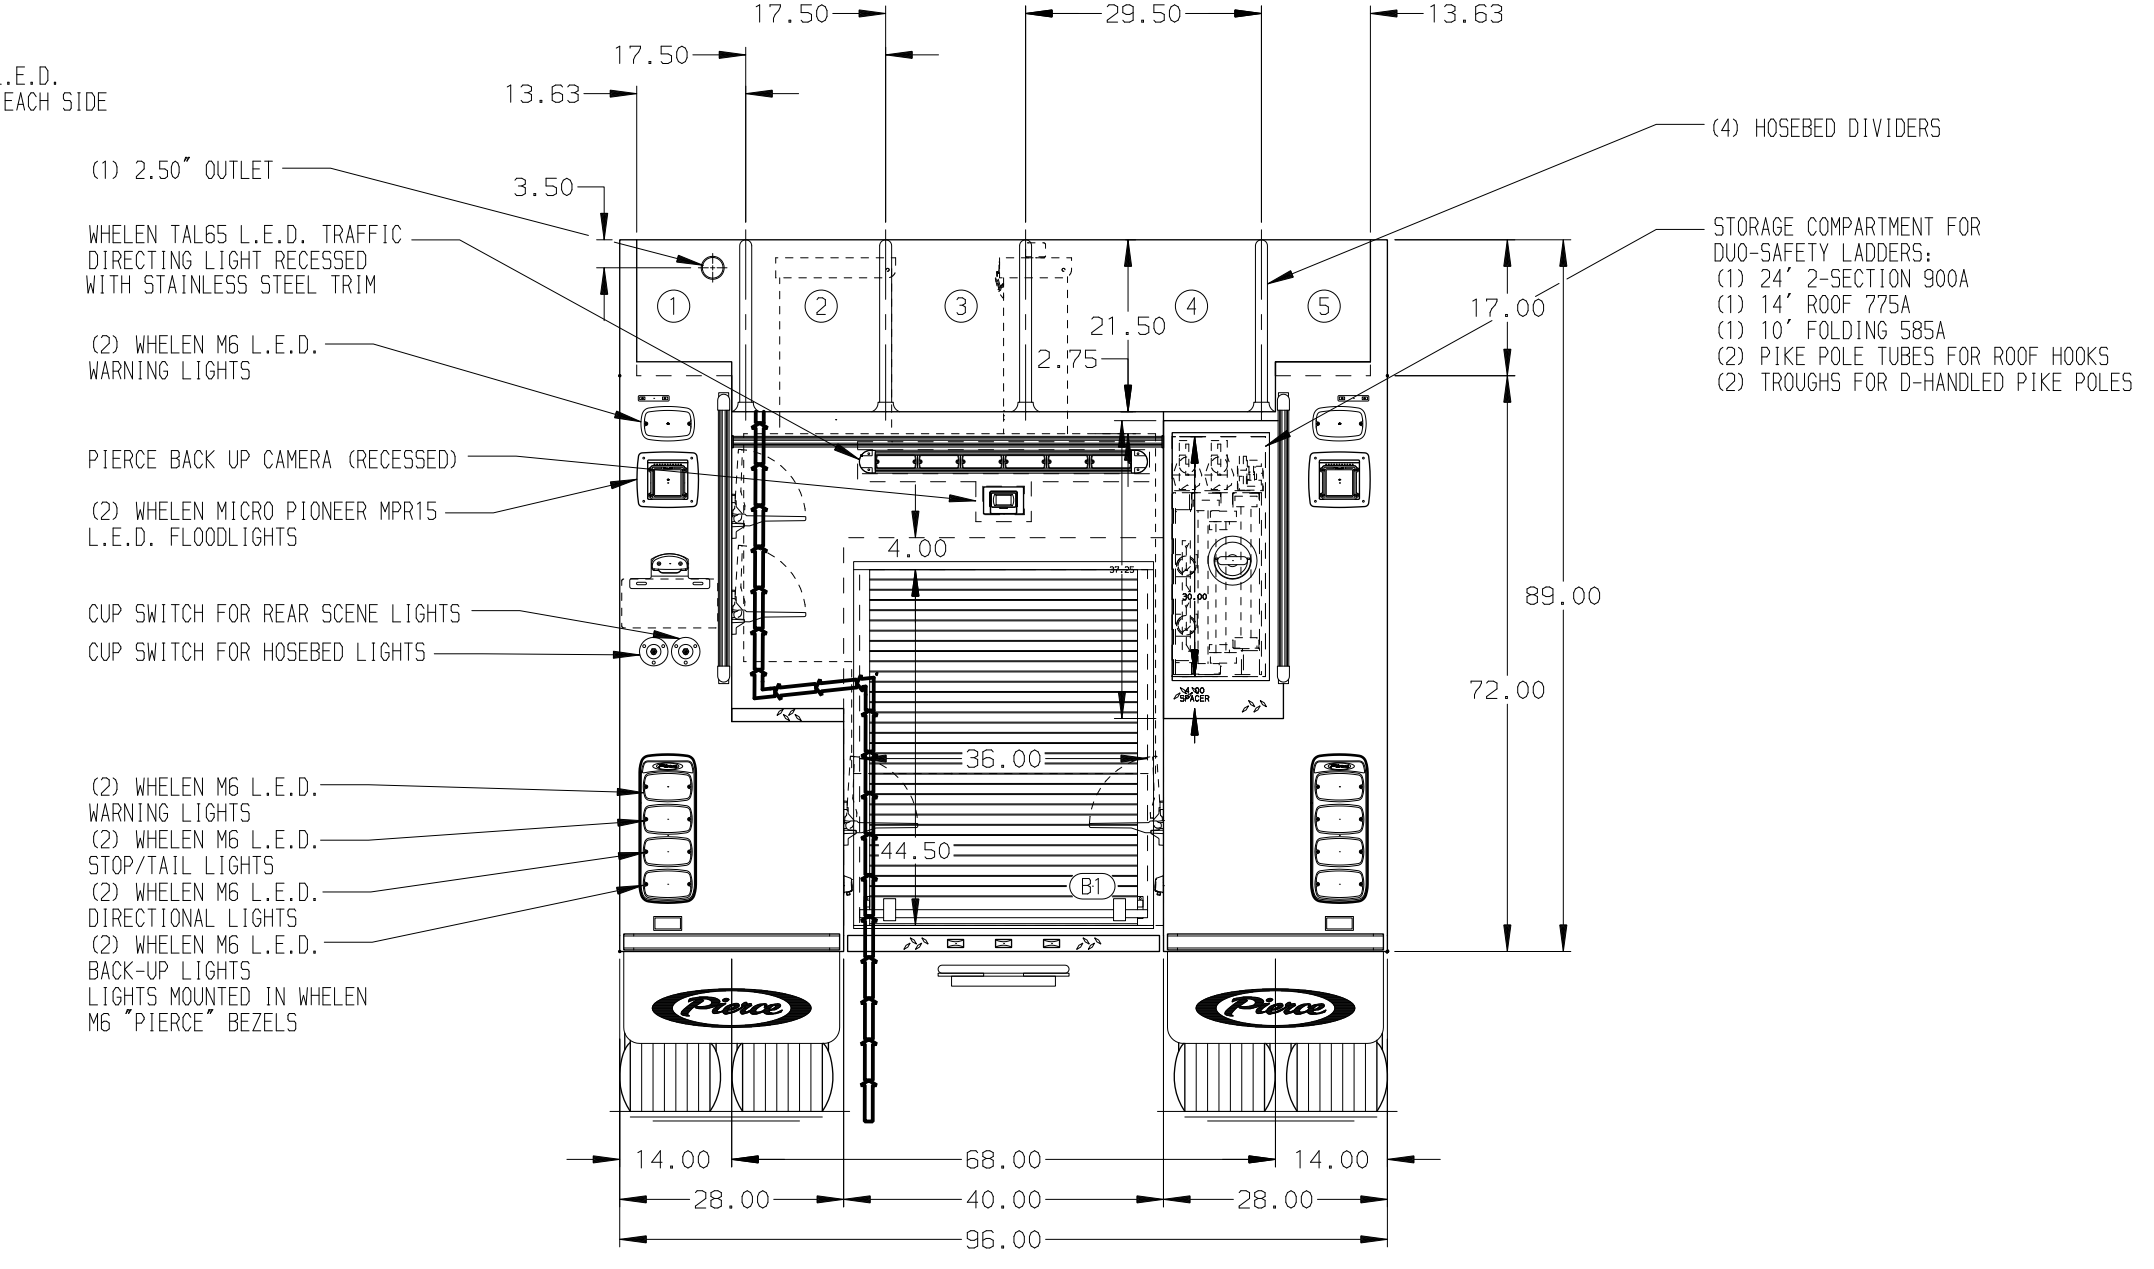
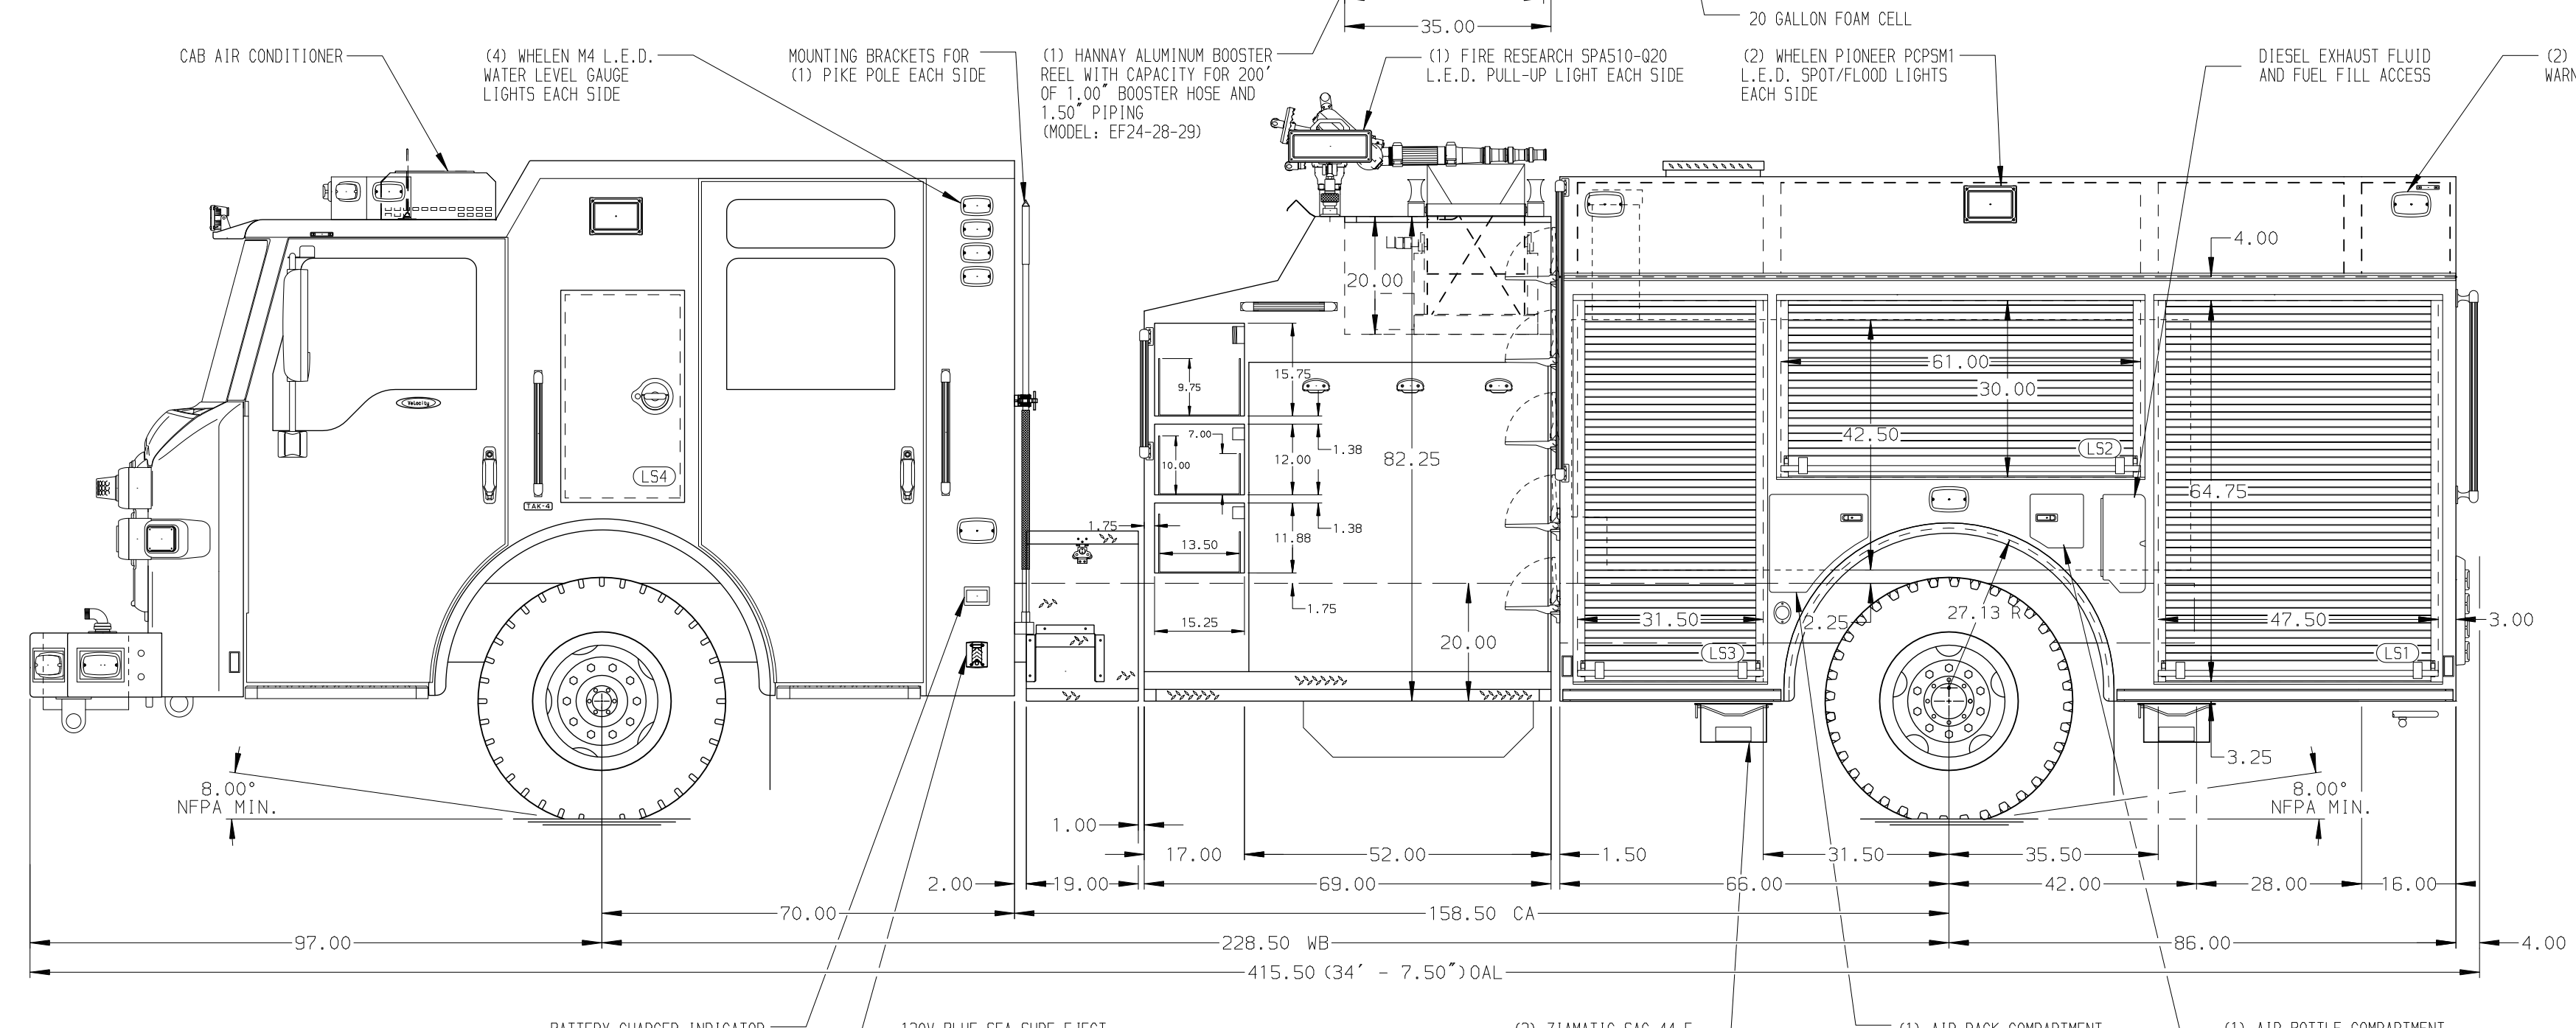


- HOSEBED CAPACITIES**
- ① - 300' OF 3.00" HOSE
 - ② - 300' OF 5.00" HOSE
 - ③ - 300' OF 5.00" HOSE
 - ④ - 400' OF 5.00" HOSE
 - ⑤ - 300' OF 3.00" HOSE

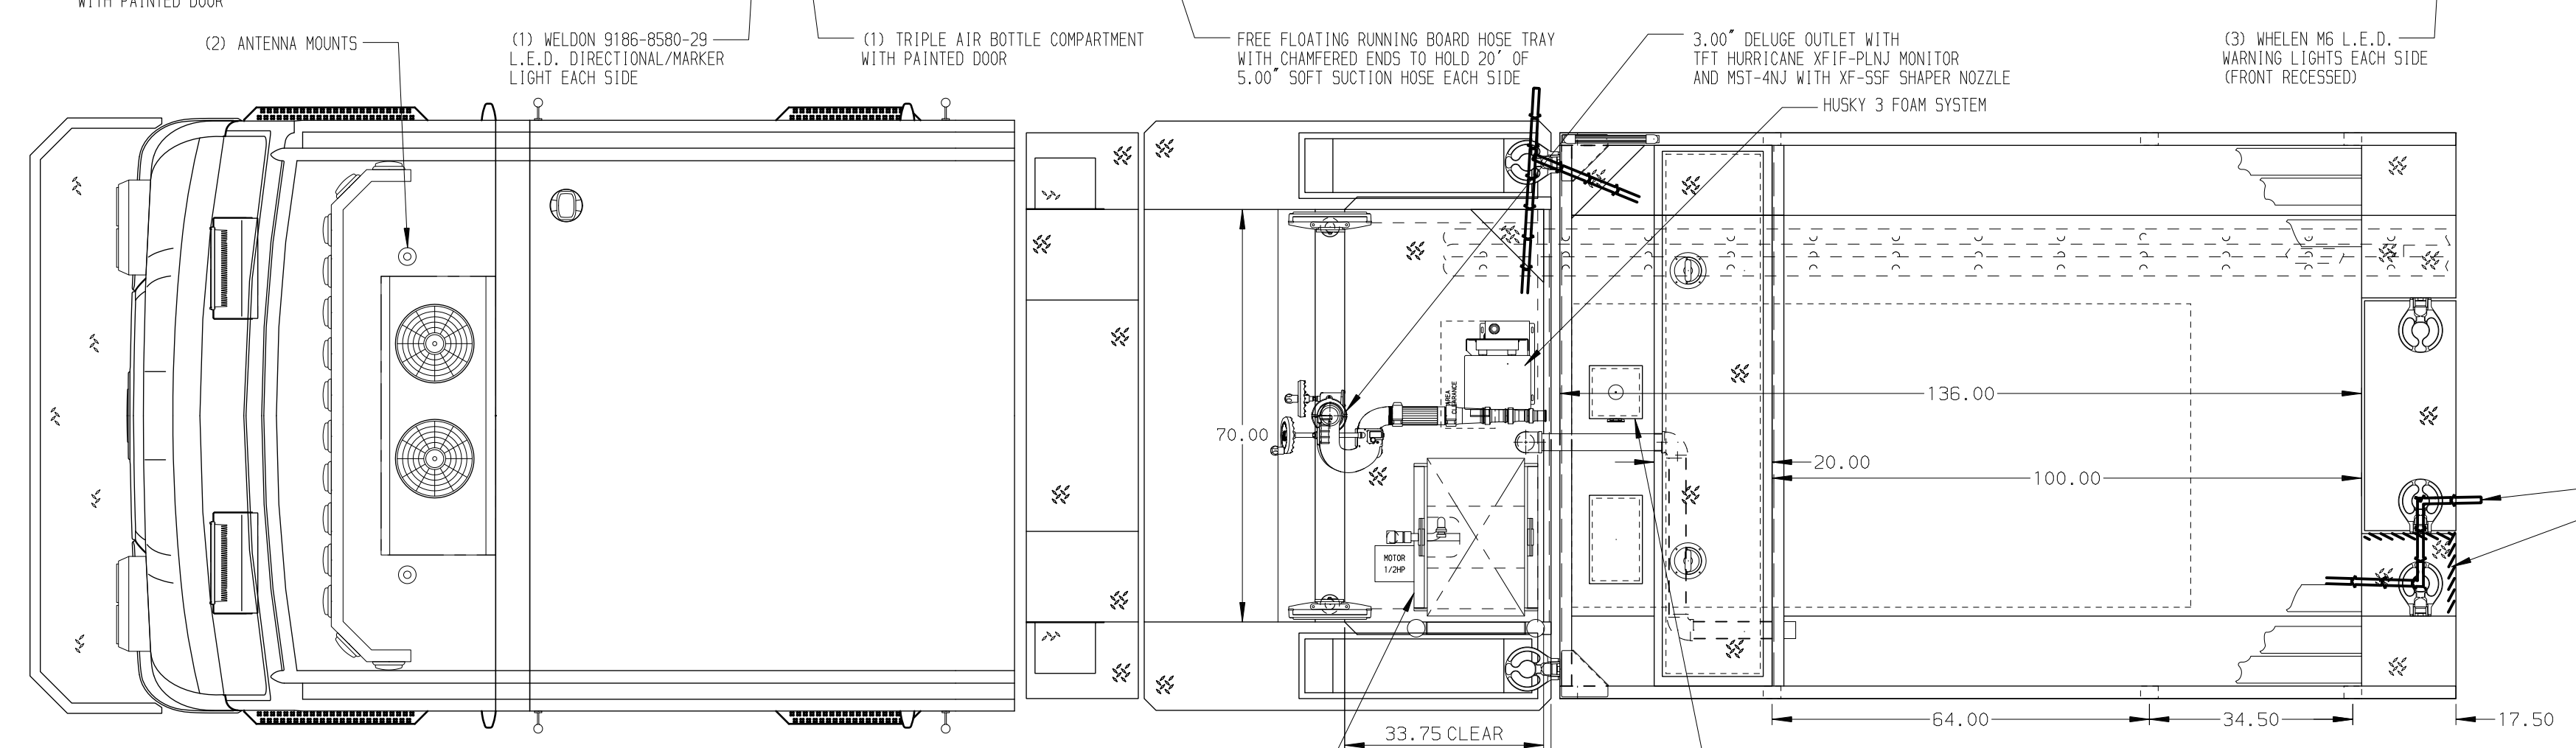

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING LOCATED IN D5 STEP WELL
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED ON ALL BODY COMPARTMENTS
4. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENTS RS2 AND RS3; TWO IN LS1, LS3, AND RS1
5. ONE SPECIAL SIZE ADJUSTABLE SHELF IN COMPARTMENT RS3
6. ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENT LS3
7. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT B1
8. ONE FULL WIDTH/DEPTH FLOOR MOUNTED SLIDE-OUT TRAY WITH SIDE SLIDES IN COMPARTMENTS LS1, RS1, RS3 AND B1
9. ONE CTECH DRAWER ASSEMBLY IN COMPARTMENT LS3
10. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT LS2

11. ALUMINUM PEGBOARD ON BACK WALL OF COMPARTMENTS LS2, LS3, AND RS2
12. HERCULES 200 CFM COMPRESSED AIR FOAM SYSTEM
13. 120V DUPLEX RECEPTACLE LOCATED IN COMPARTMENT RS1

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
CHASSIS DATA	TITLE	2000-D-750P W/20 GAL FOAM CELL, 152" PUMPER BODY	
MAKE	FOR	(3)SPEEDLAYS, DELUGE, LADDERS BESIDE TANK, CAFS	
PIERCE		BULVERDE SPRING BRANCH FIRE EMS	
MODEL		SPRING BRANCH, TEXAS	
VELOCITY	DWG NO.	36814AD	

Pierce MANUFACTURING INC.		JOB NO.	36814
SCALE	1:24	DATE	
DRAWN BY	KLE		10DEC21
CHECKED BY	WKL		10DEC21
SHEET SIZE	D	SHEET NO.	1 OF 1