


HOSEBED CAPACITIES

①	- 300' OF 1.75" D.J. POLY HOSE
②	- 300' OF 2.50" D.J. POLY HOSE
③	- 300' OF 2.50" D.J. POLY HOSE
④	- 800' OF 5.00" D.J. POLY HOSE

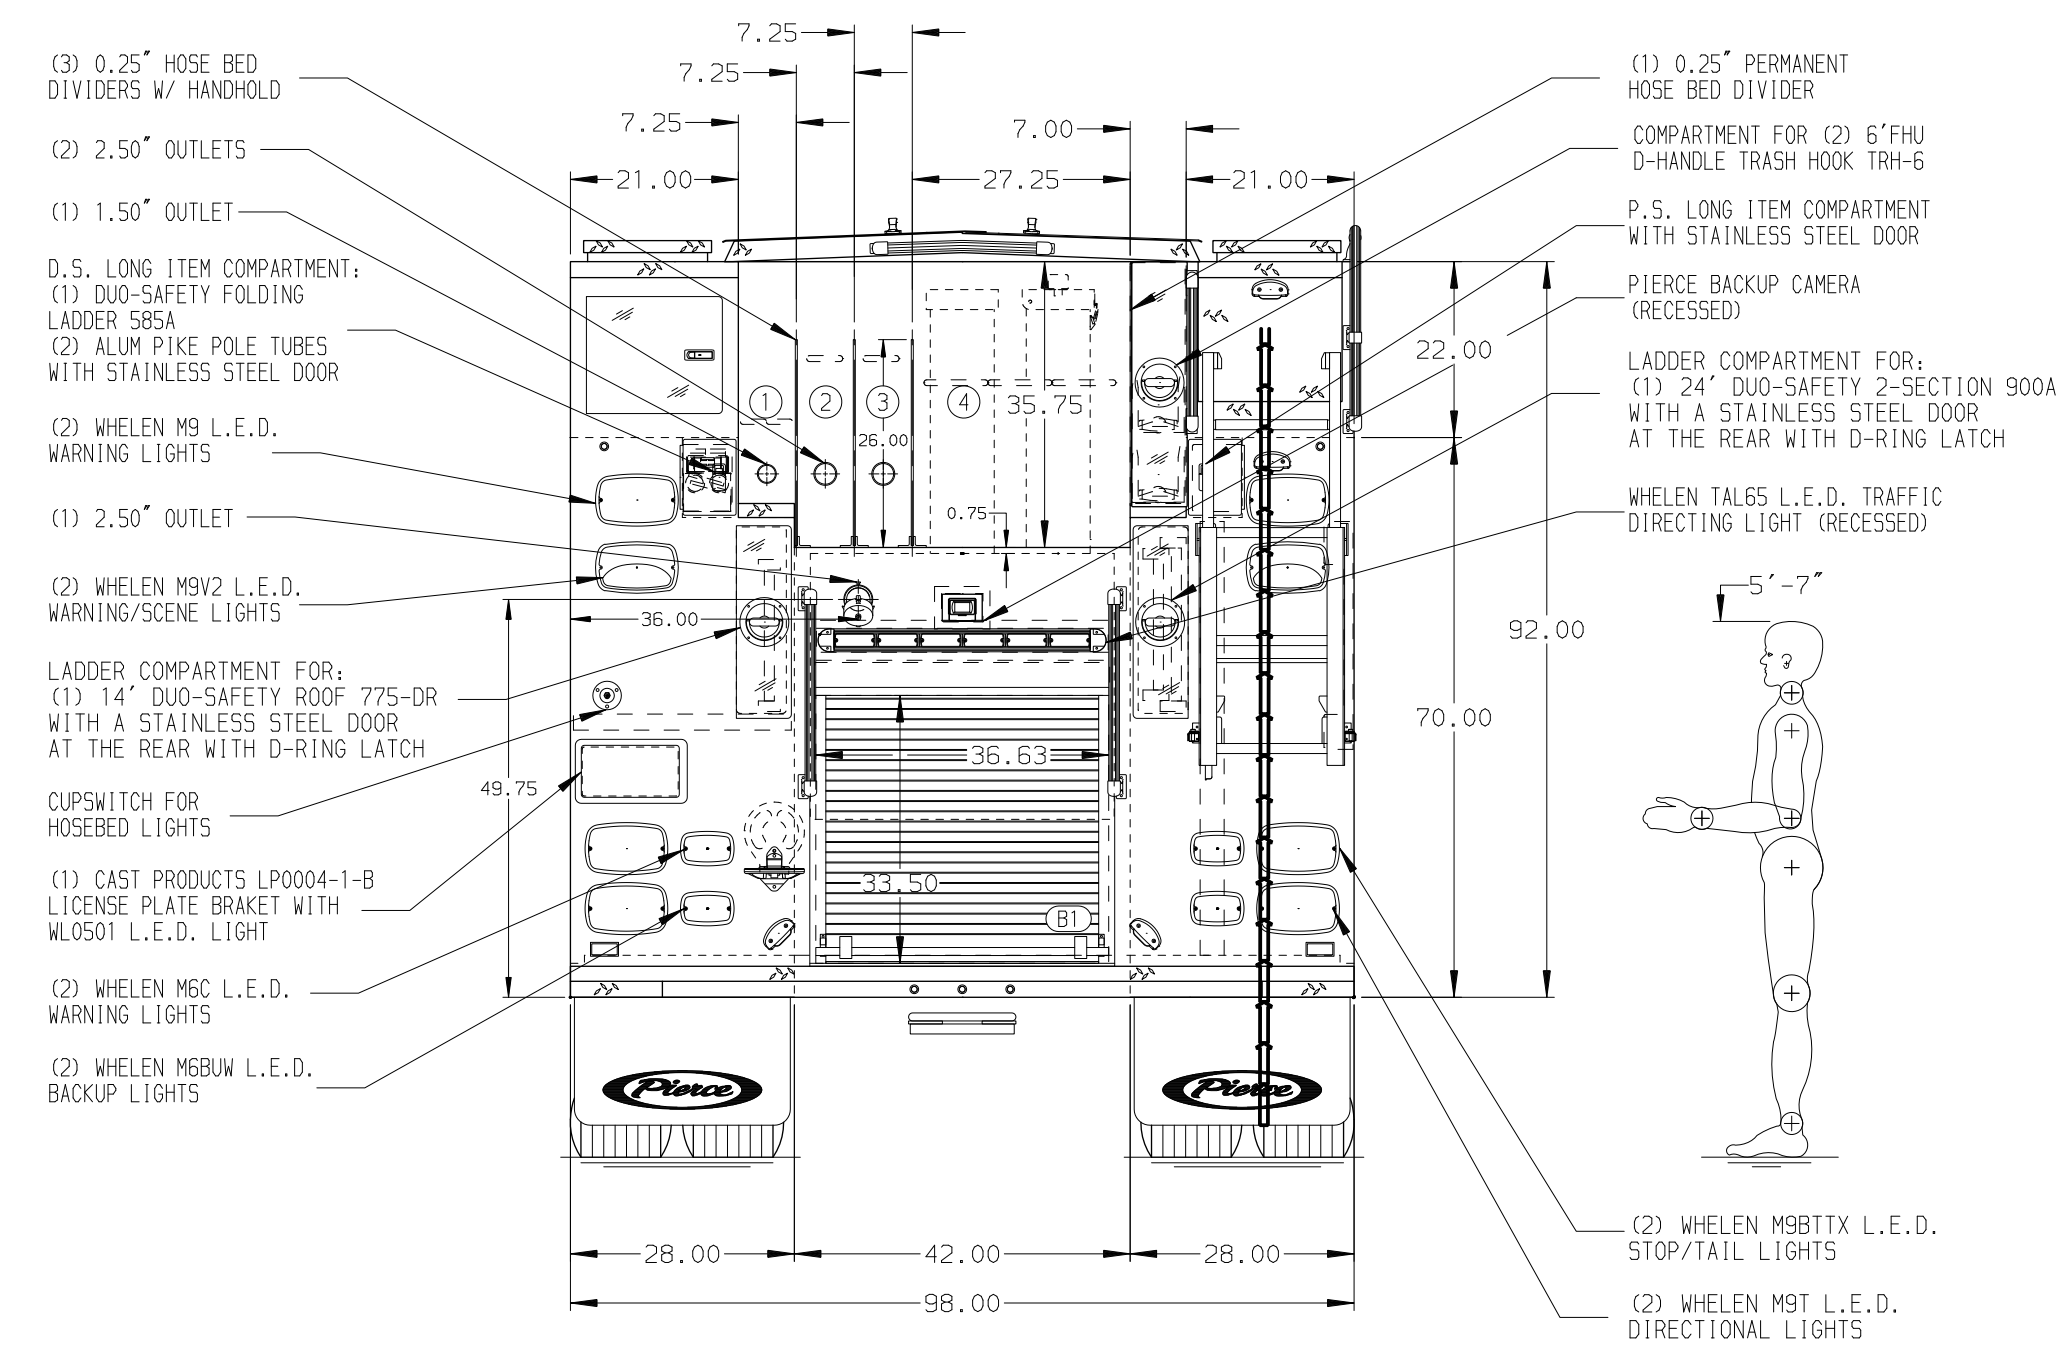

ALUMINUM BODY

NOTE  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER INDICATOR BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW
- SUB-FEED CIRCUIT BREAKER PANEL LOCATED PER SHOP ORDER
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 5/STL SCUFFPLATE ON ALL SIDES OF CROSSLAY OPENINGS
- 120V DUPLEX RECEPTACLE LOCATED PER SHOP ORDER
- AIR INLET WITH DISCONNECT COUPLING BEHIND THE DRIVER'S SEAT RISER

CUSTOMER APPROVAL

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

CHASSIS DATA	TITLE	1500-D-530P, 500G WATER, 30G FOAM, 189" RESCUE BODY
MAKE	FOR	HENDERSON FIRE DEPARTMENT
PIERCE		HENDERSON, NEVADA
MODEL	DWG NO.	36830AD-SH1
VELOCITY		

**Pierce** MANUFACTURING INC.

JOB NO. 36830-01-02

SCALE 1:24 DATE

DRAWN BY JJB 16DEC21

CHECKED BY BSE 17DEC21

SHEET SIZE D SHEET NO. 1 OF 2