


- HOSEBED CAPACITIES**
- ① 300' OF 3.00" D.J. HOSE
 - ② 300' OF 3.00" D.J. HOSE
 - ③ 650' OF 5.00" LDH
 - ④ 200' OF 2.50" D.J. HOSE
 - ⑤ 600' OF 1.50" FORESTRY HOSE

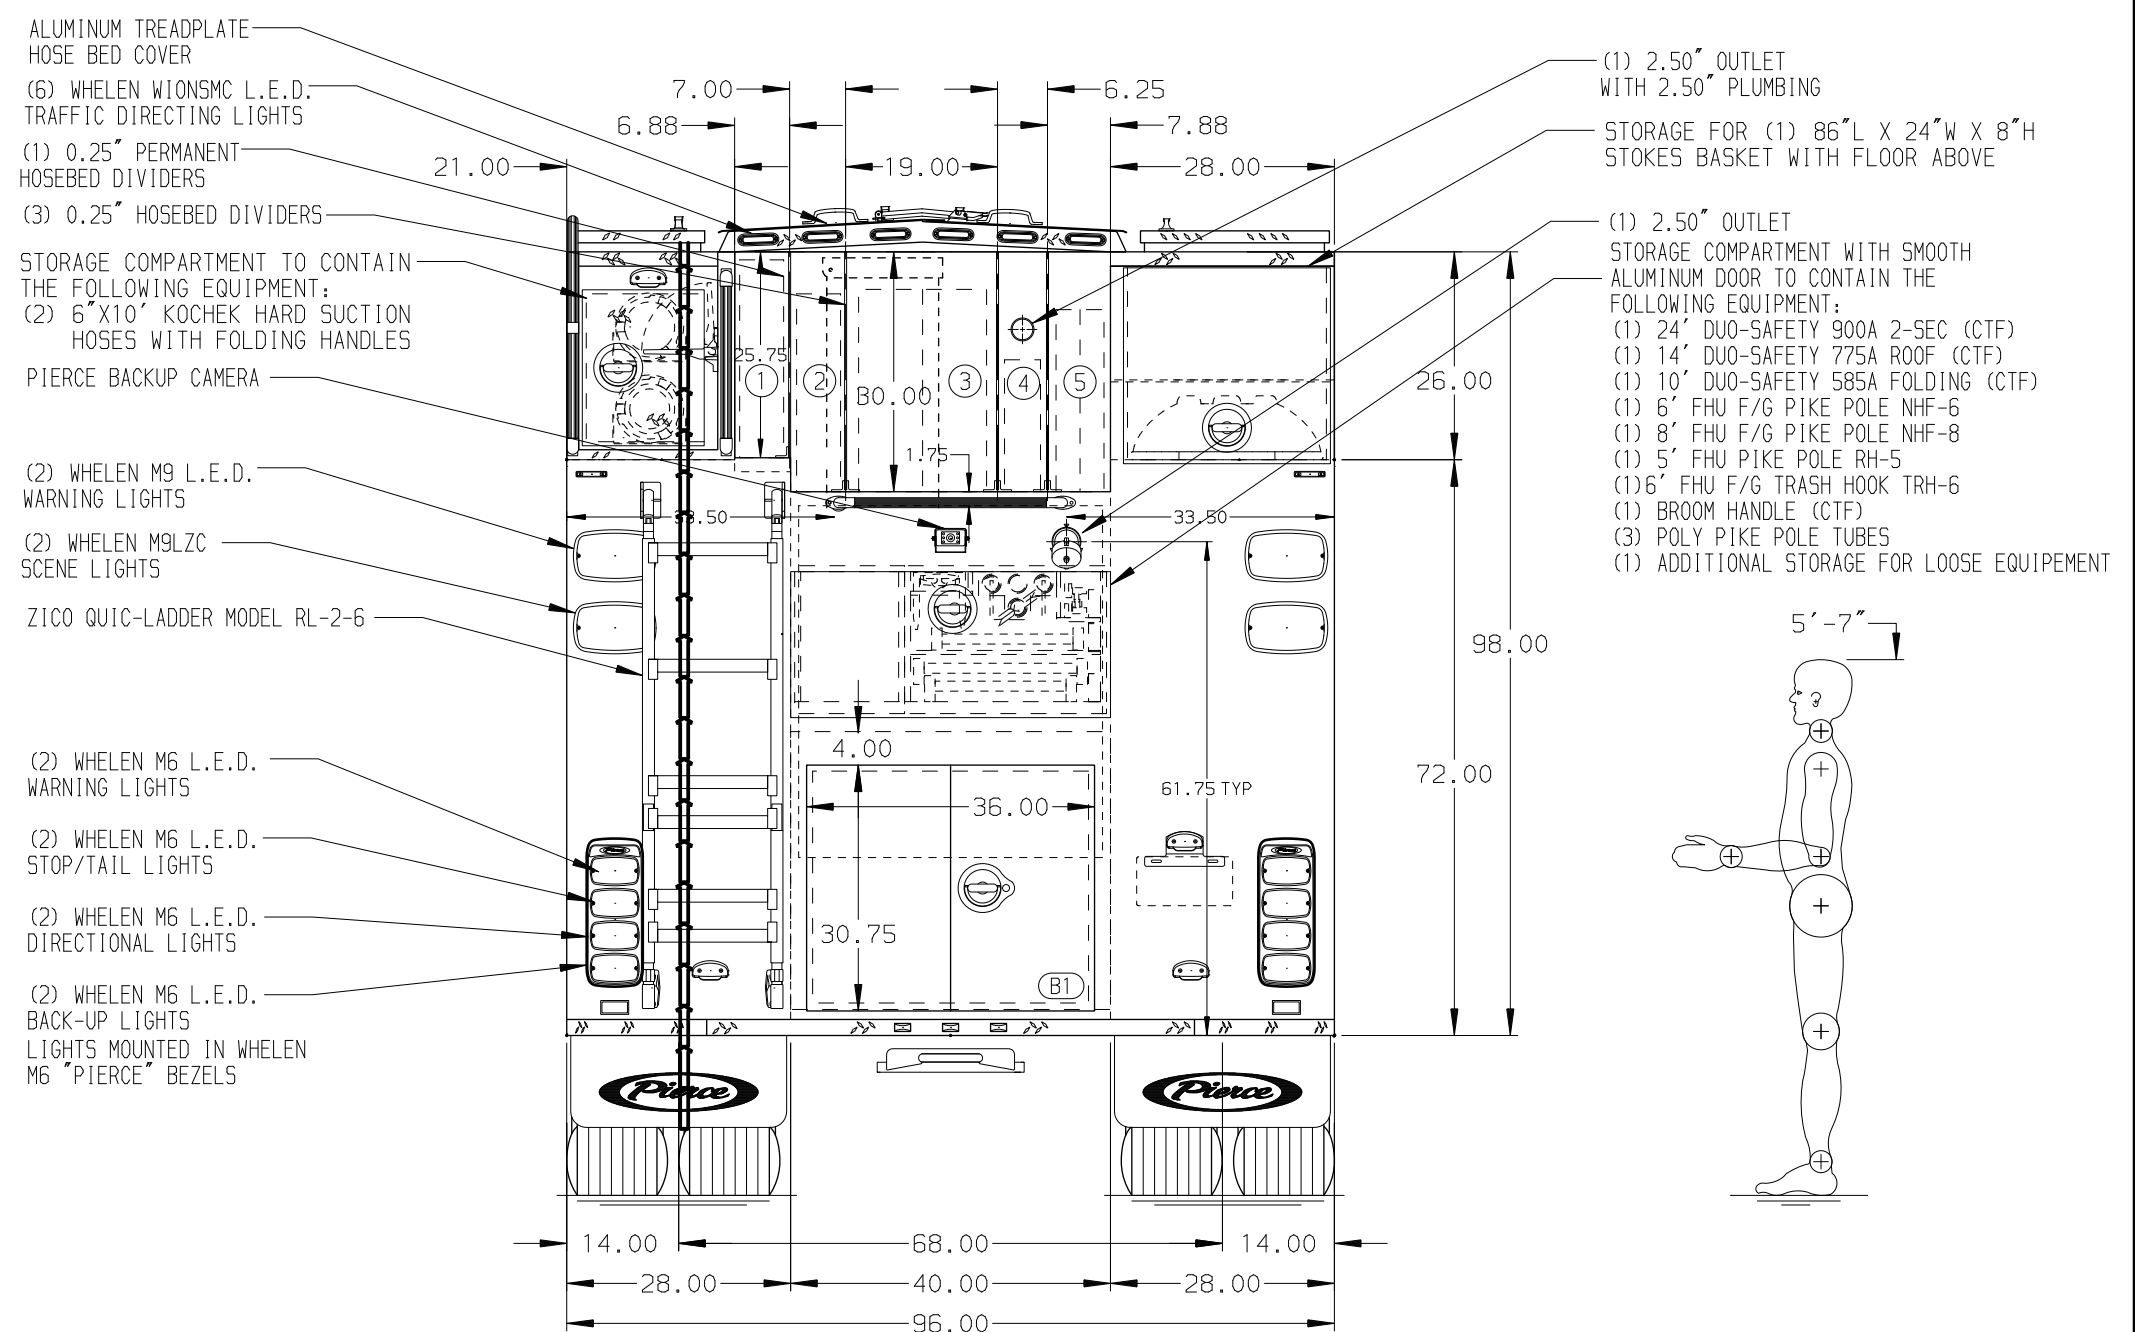

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED PER ORDER
3. PULL STRAP ON DOORS LOCATED PER ORDER
4. XANTREX INVERTER LOCATED PER ORDER
5. ONE 120V 6-PLACE RECEPTACLE STRIP LOCATED PER ORDER
6. THREE 120V DUPLEX RECEPTACLES LOCATED PER ORDER
7. AIR OUTLET WITH SHUT OFF VALVE LOCATED IN BOTH PUMP PANELS
8. FOAM PRO 1600 SINGLE AGENT FOAM SYSTEM LOCATED PER ORDER
9. SIX FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER ORDER
10. ONE FULL WIDTH/DEPTH FIXED SHELF LOCATED PER ORDER
11. ONE FLAT TOP ADJUSTABLE SHELF LOCATED PER ORDER
12. TWO TILT/SLIDE-OUT ADJUSTABLE TRAYS LOCATED PER ORDER
13. TWO SLIDE-OUT FLOOR MOUNTED TRAYS LOCATED PER ORDER
14. ONE SLIDE-OUT TOOLBOARD WITH PEG BOARD LOCATED PER ORDER
15. ONE SKING-OUT TOOLBOARD WITH PEG BOARD LOCATED PER ORDER
16. SIX VERTICAL PARTITIONS LOCATED PER ORDER
17. ONE ZICO SCBA BRACKET LOCATED PER ORDER
18. ONE ADJUSTABLE HANGER/POST LOCATED PER ORDER

REV	DATE	BY	CH	ENFORCER
22JUN23	LME	NPE		
28APR23	LME	NPE		

CHASSIS DATA	TITLE	1500-D-520P, 500G WATER W/20G FOAM, 161" RESCUE BODY
MAKE	FOR	(2)CROSSLAYS, DELUGE, BOOSTER REEL, LADDERS THRU TUNNEL
MODEL	DWG NO.	SUMMIT FIRE & EMS DILLON, COLORADO

Pierce MANUFACTURING INC.

JOB NO. 38431

SCALE 1:24 DATE

DRAWN BY LME 20FEB23

CHECKED BY NPE 21FEB23

SHEET SIZE D SHEET NO. 1 OF 1

38431AD