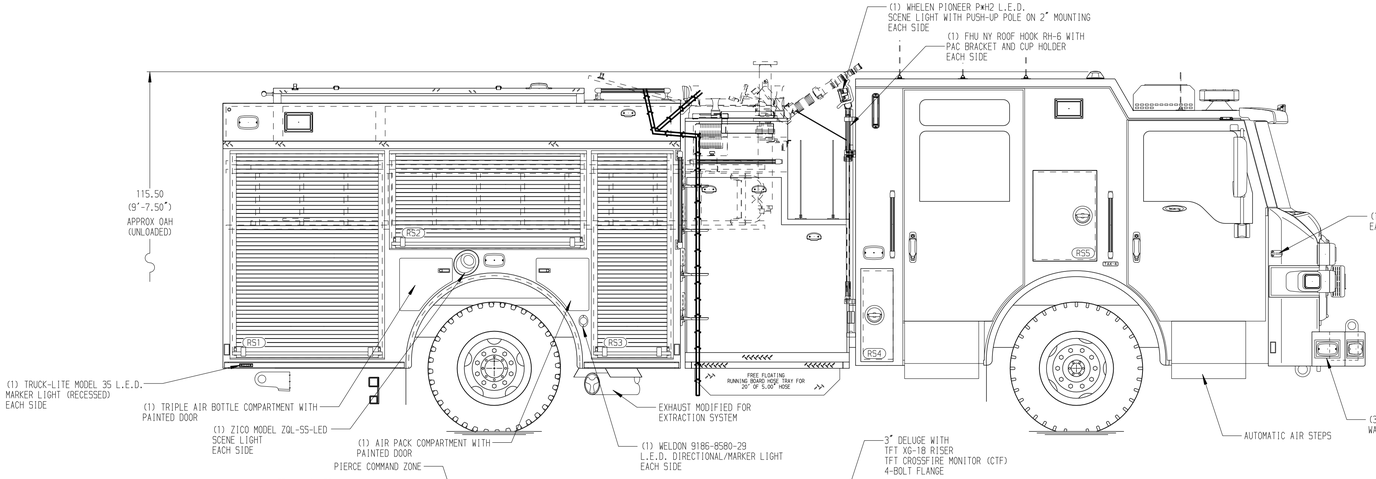

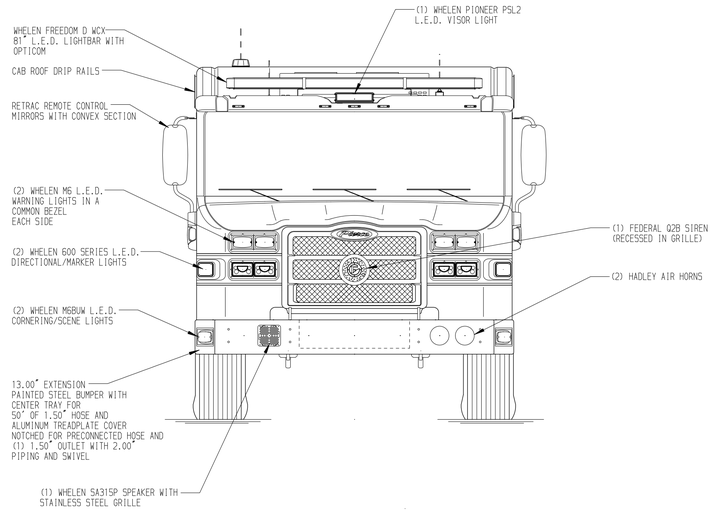

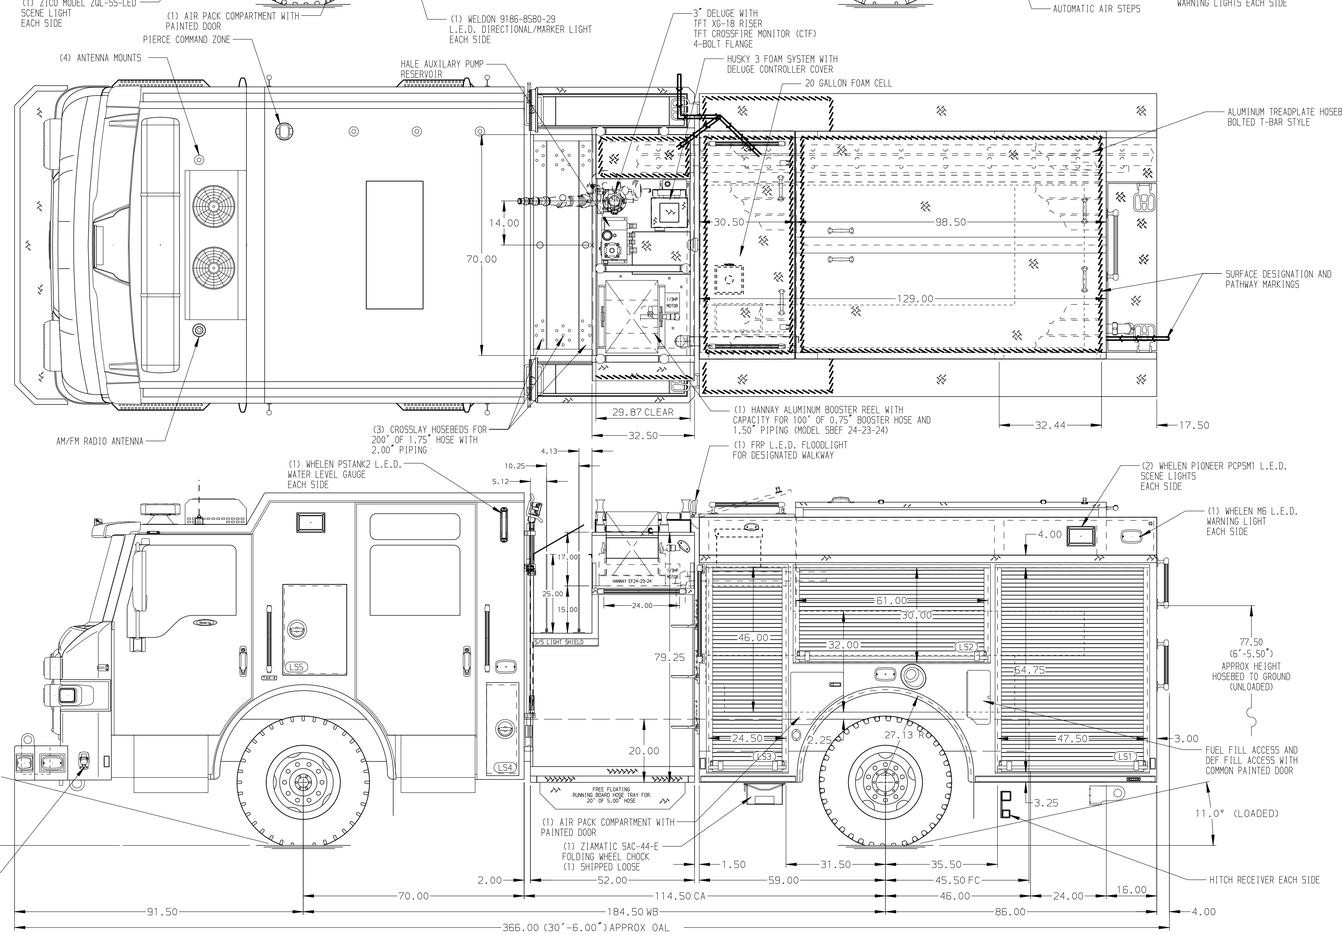

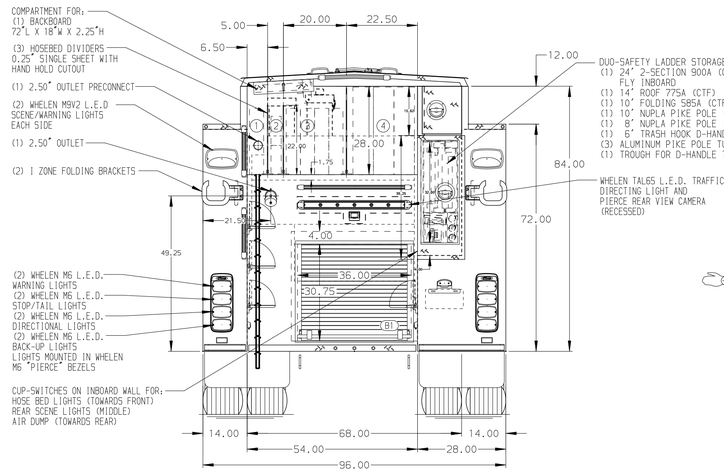

HOSEBED CAPACITIES

1. - 200' OF 2.50" DJP HOSE
2. - TWO BUNDLES OF 100' X 1.75" SJP HOSE
3. - 800' OF 2.50" DJP HOSE
4. - 800' OF 4.00" DJP HOSE

GALVANNEAL

MAXIMUM O.A.L. 367" | MAXIMUM O.A.H. 117" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR OUTLET WITH SHUT OFF VALVE RECESSED IN DRIVER'S SIDE PUMP PANEL
2. BATTERY CHARGER/COMPRESSOR LOCATED PER ORDER
3. FOUR L.E.D. LIGHTS IN HOSE BED
4. SEVEN DRIP PAN GUARDS LOCATED ON COMPARTMENTS PER ORDER
5. SEVEN DUAL L.E.D. LIGHT STRIPS ON COMPARTMENT DOOR SIDES PER ORDER
6. FOURTEEN ADJUSTABLE FULL WIDTH/FULL DEPTH SHELVES LOCATED IN COMPARTMENTS PER ORDER
7. ONE CTECH DRAWER ASSEMBLY LOCATED IN COMPARTMENT PER ORDER
8. ONE SWING-OUT TOOLBOARD LOCATED IN COMPARTMENT PER ORDER
9. PARTITION BETWEEN COMPARTMENTS RS1/B1
10. ONE VERTICAL PARTITION LOCATED IN COMPARTMENT PER ORDER
11. SMOOTH ALUMINUM ON THE FLOOR OF COMPARTMENT LS1 & B1
12. FIVE DUST FILTERS LOCATED IN COMPARTMENTS PER ORDER
13. THREE TOOLBOARDS LOCATED ON THE BACK WALLS OF COMPARTMENTS PER ORDER
14. TWO L.E.D. LIGHT STRIPS LOCATED IN CARGO AREA PER ORDER
15. TWO 15A 120V STRAIGHT BLADE DUPLES RECEPTACLES LOCATED IN COMPARTMENTS PER ORDER
16. HALE CBP HYD AUXILIARY PUMP 250GPM WITH DUAL CONTROLS

REV	DATE	BY	CH
V	20FEB24	SAM	AST
IV	11JAN24	SAM	AST
III	10NOV23	SAM	WKL

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

Pierce MANUFACTURING INC.

TITLE: 1500-D-620P,600G WATER W/20G FOAM,145"(140"+5") BODY (3) CROSSLAYS, LADDERS BTWN TANK AND SS, DELUGE
FOR: SAN RAMON VALLEY FIRE PROTECTION DISTRICT
SAN RAMON, CALIFORNIA
DWG NO. 38443AD

JOB NO.	38443 01-04
SCALE	1:24
DATE	
DRAWN BY	SAM 07NOV23
CHECKED BY	WKL 07NOV23
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 21-FEB-2024 10:30:41