
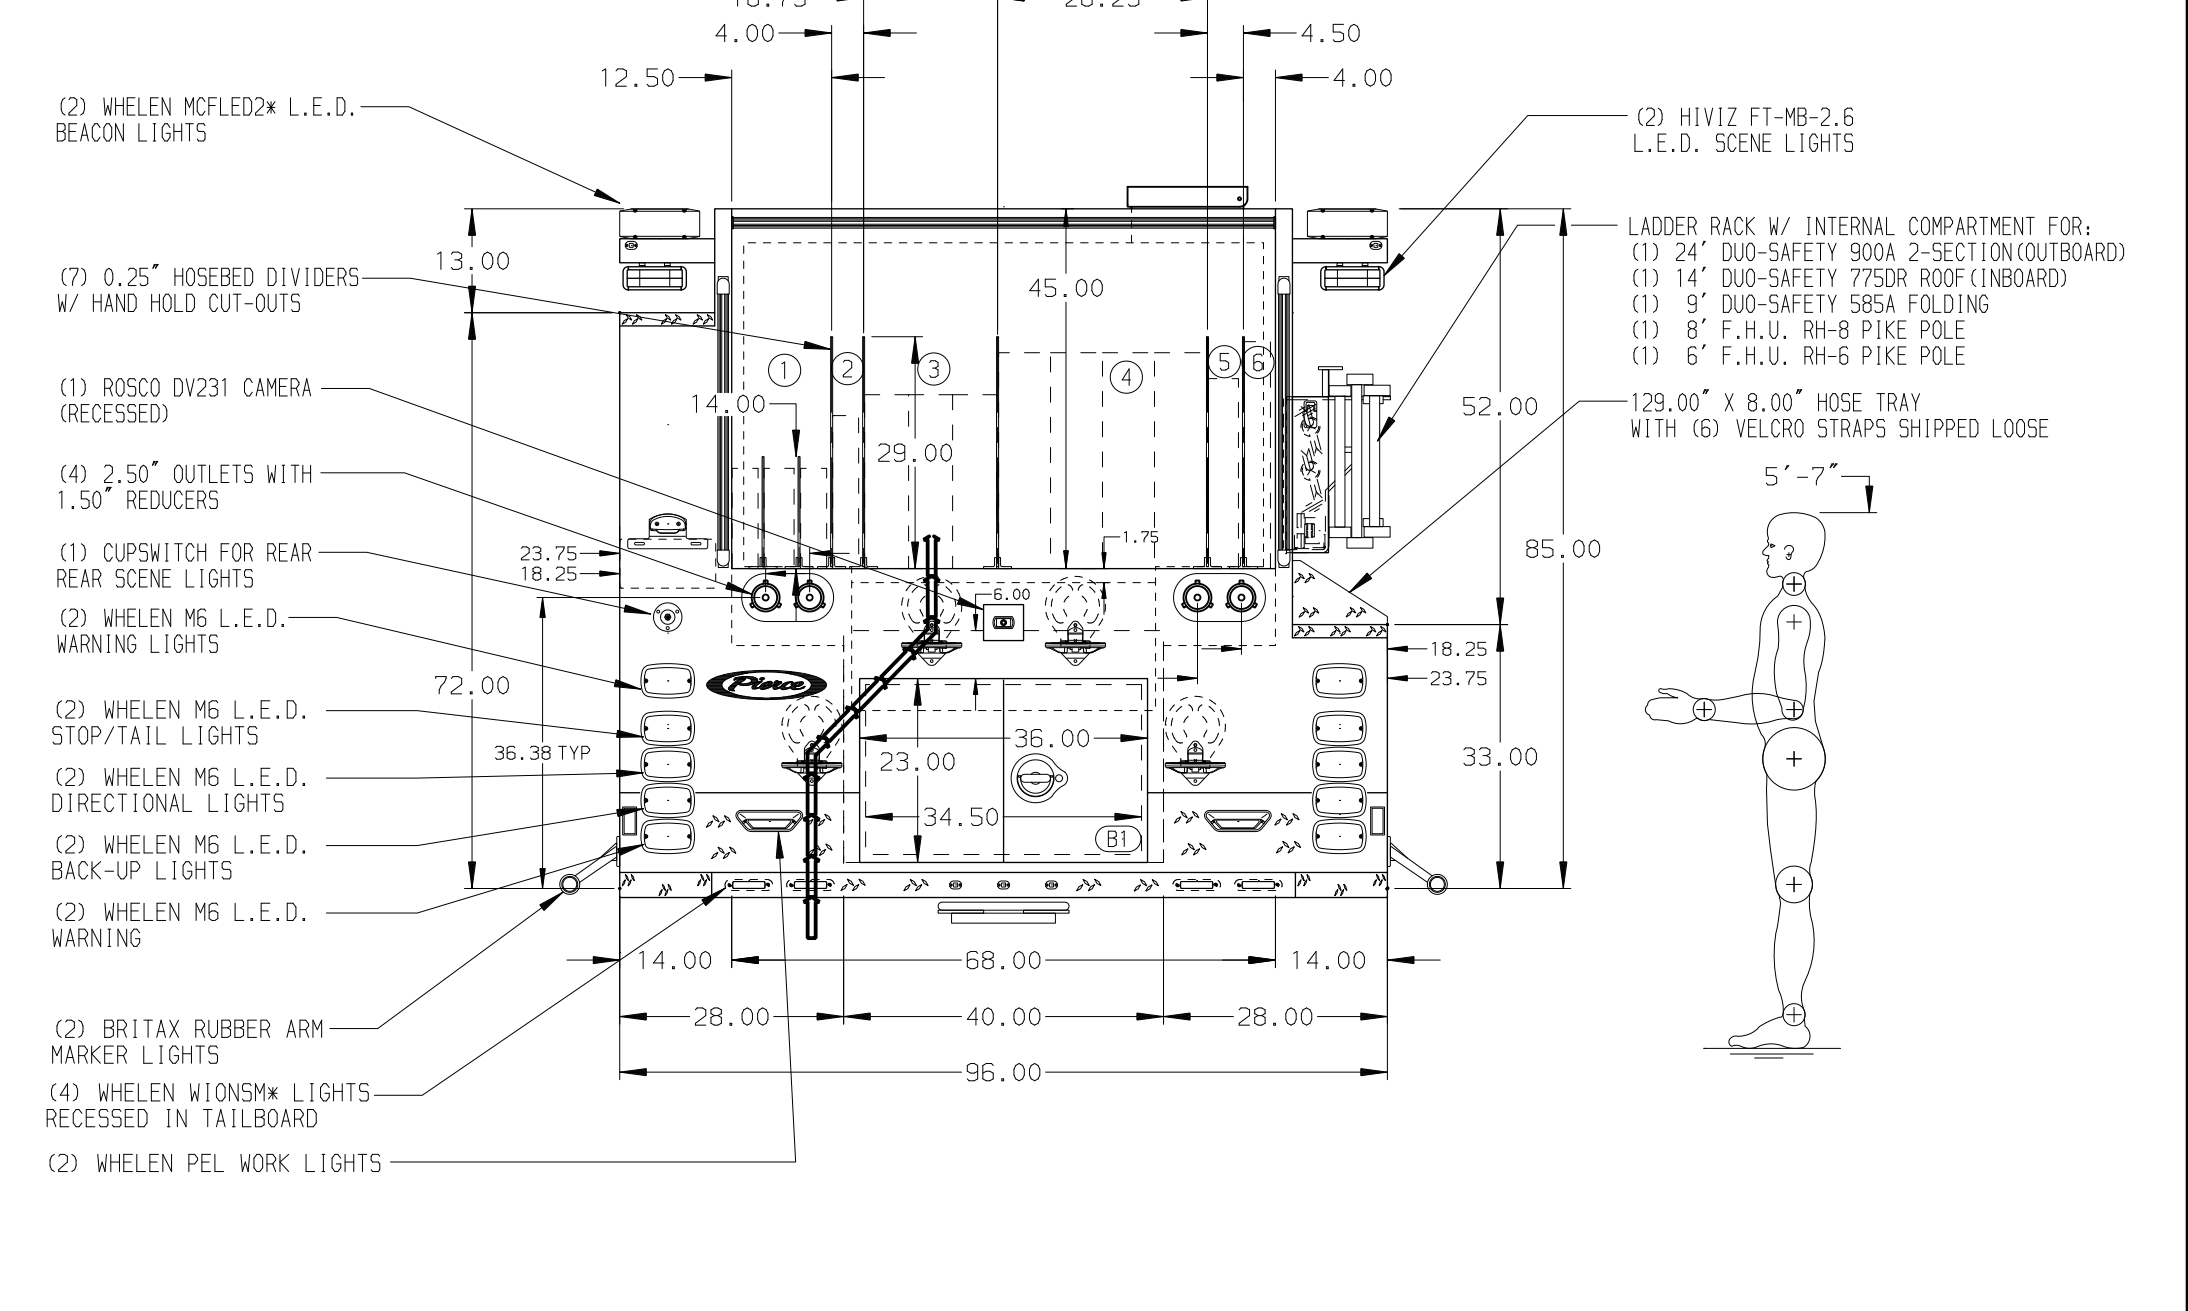


HOSEBED CAPACITIES

- 400' OF 1.75" D.J. POLY HOSE
- 200' OF 1.75" D.J. POLY HOSE
- 600' OF 3.00" D.J. POLY HOSE
- 1000' OF 4.00" D.J. POLY HOSE
- 250' OF 2.00" D.J. POLY HOSE
- 300' OF 1.75" D.J. POLY HOSE

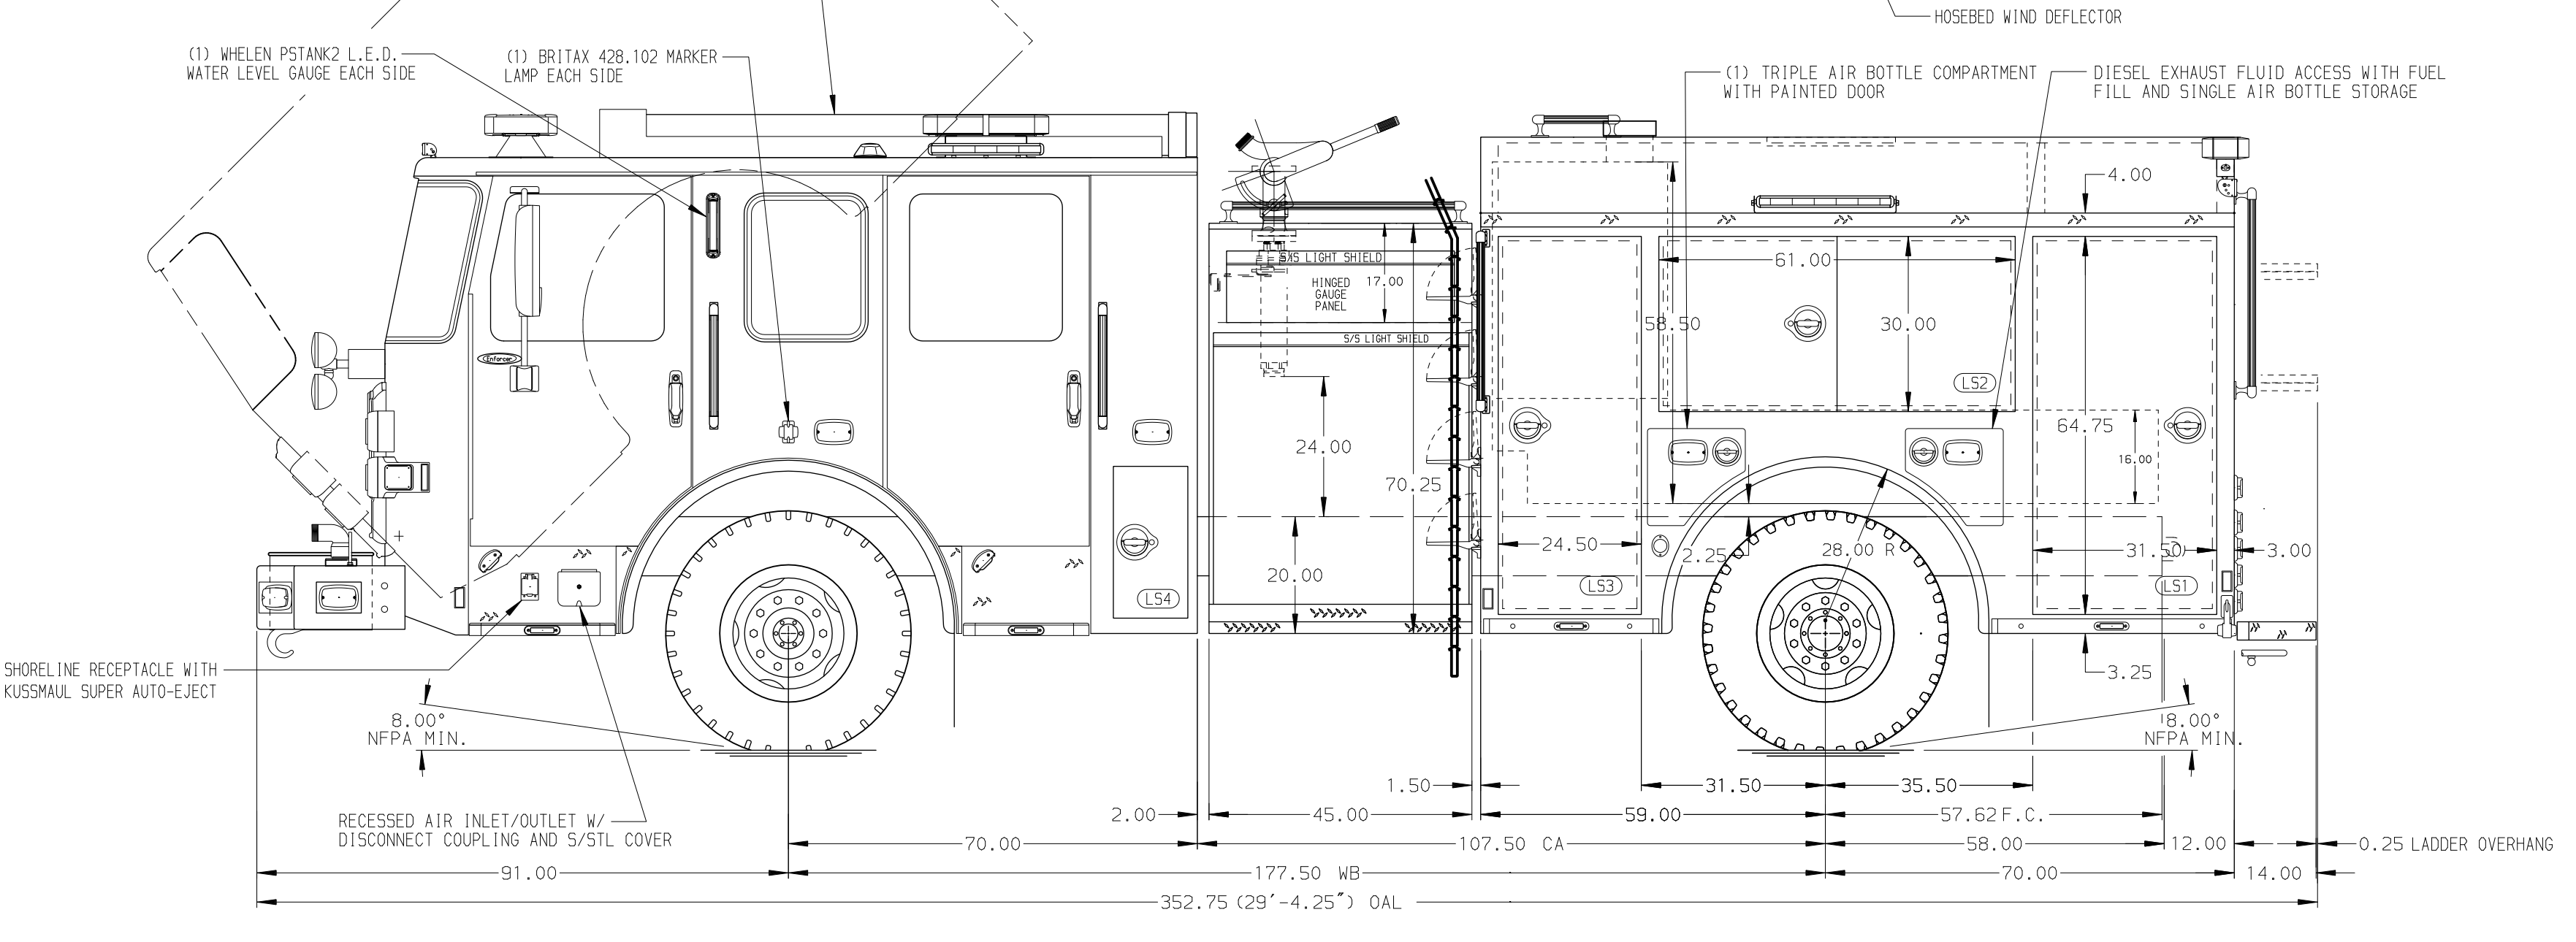

ALUMINUM BODY    MAXIMUM O.A.L. 353"    MAXIMUM O.A.H. 118"    SIDE ROLL AND FRONTAL IMPACT PROTECTION

**NOTE**  
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ANCHOR PLATE FOR NEDERMAN SYSTEM APPROX. 25.50" FROM CL OF EXHAUST EXTRACTOR
- ONE ZIAMATIC SCEN HOLDER BRACKET SHIPPED LOOSE
- FULL LENGTH BRUSHED 5/8" S/STL SCUFFPLATE UNDER D.E.F. FILL DOOR
- CARGO AREA ABOVE PUMP TO HAVE 4-WAY ACCESS DOOR WITH GAS STRUTS & CHROME HANDLE

CUSTOMER APPROVAL		
APPROVED BY:		
DATE:		
CHASSIS DATA	TITLE	
PIERCE	FOR	
MODEL	DWG NO.	
ENFORCER		

**Pierce MANUFACTURING INC.**

1500-D-500P, 129" SP BODY, 45" SIDE CONTROL PUMPHOUSE  
 NEW YORK HOSEBED, SP REAR COMPT, (2) HSH'S, LDERS ON PS SS  
 PRINCE GEORGE'S COUNTY FIRE & EMS  
 LARGO, MARYLAND

36906AD-SH1

JOB NO.	36906 01-02
SCALE	1:24
DATE	
DRAWN BY	KLE
CHECKED BY	JBL
SHEET SIZE	
SHEET NO.	1 OF 2