

Pumper, PUC

BODY

Pumper, PUC, Aluminum

CHASSIS

Enforcer Chassis, PUC

CHASSIS AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

27,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

26" Extended Stainless Steel

CAB

7010 Enforcer Cab, PUC

BODY

WATER TANK

750 Gallon Poly Water Tank

COMPT, PUMPER, REAR

50.50" FF RollUp Rear Compt w/Tailboard, PUC

COMPT, PUMPER, LEFT SIDE

189" Lap/RollUp Full Height & Depth Front & Rear, PUC

COMPT, PUMPER, RIGHT SIDE

189" Lap Full Height & Depth Front & Rear, PUC

FIRE SUPPRESSION PUMPHOUSE

Control Zone, PUC

PUMP

1500 GPM Pierce PUC

CROSSLAYS, 1.50"

(1) 1.50", Poly Tray, 200'

CROSSLAYS, 2.50"

(1) 2.50", Poly Tray, 200'

GENERATOR


Generator Not Required

Foam System

Foam System Not Required

Foam Cell

Foam Cell Not Required

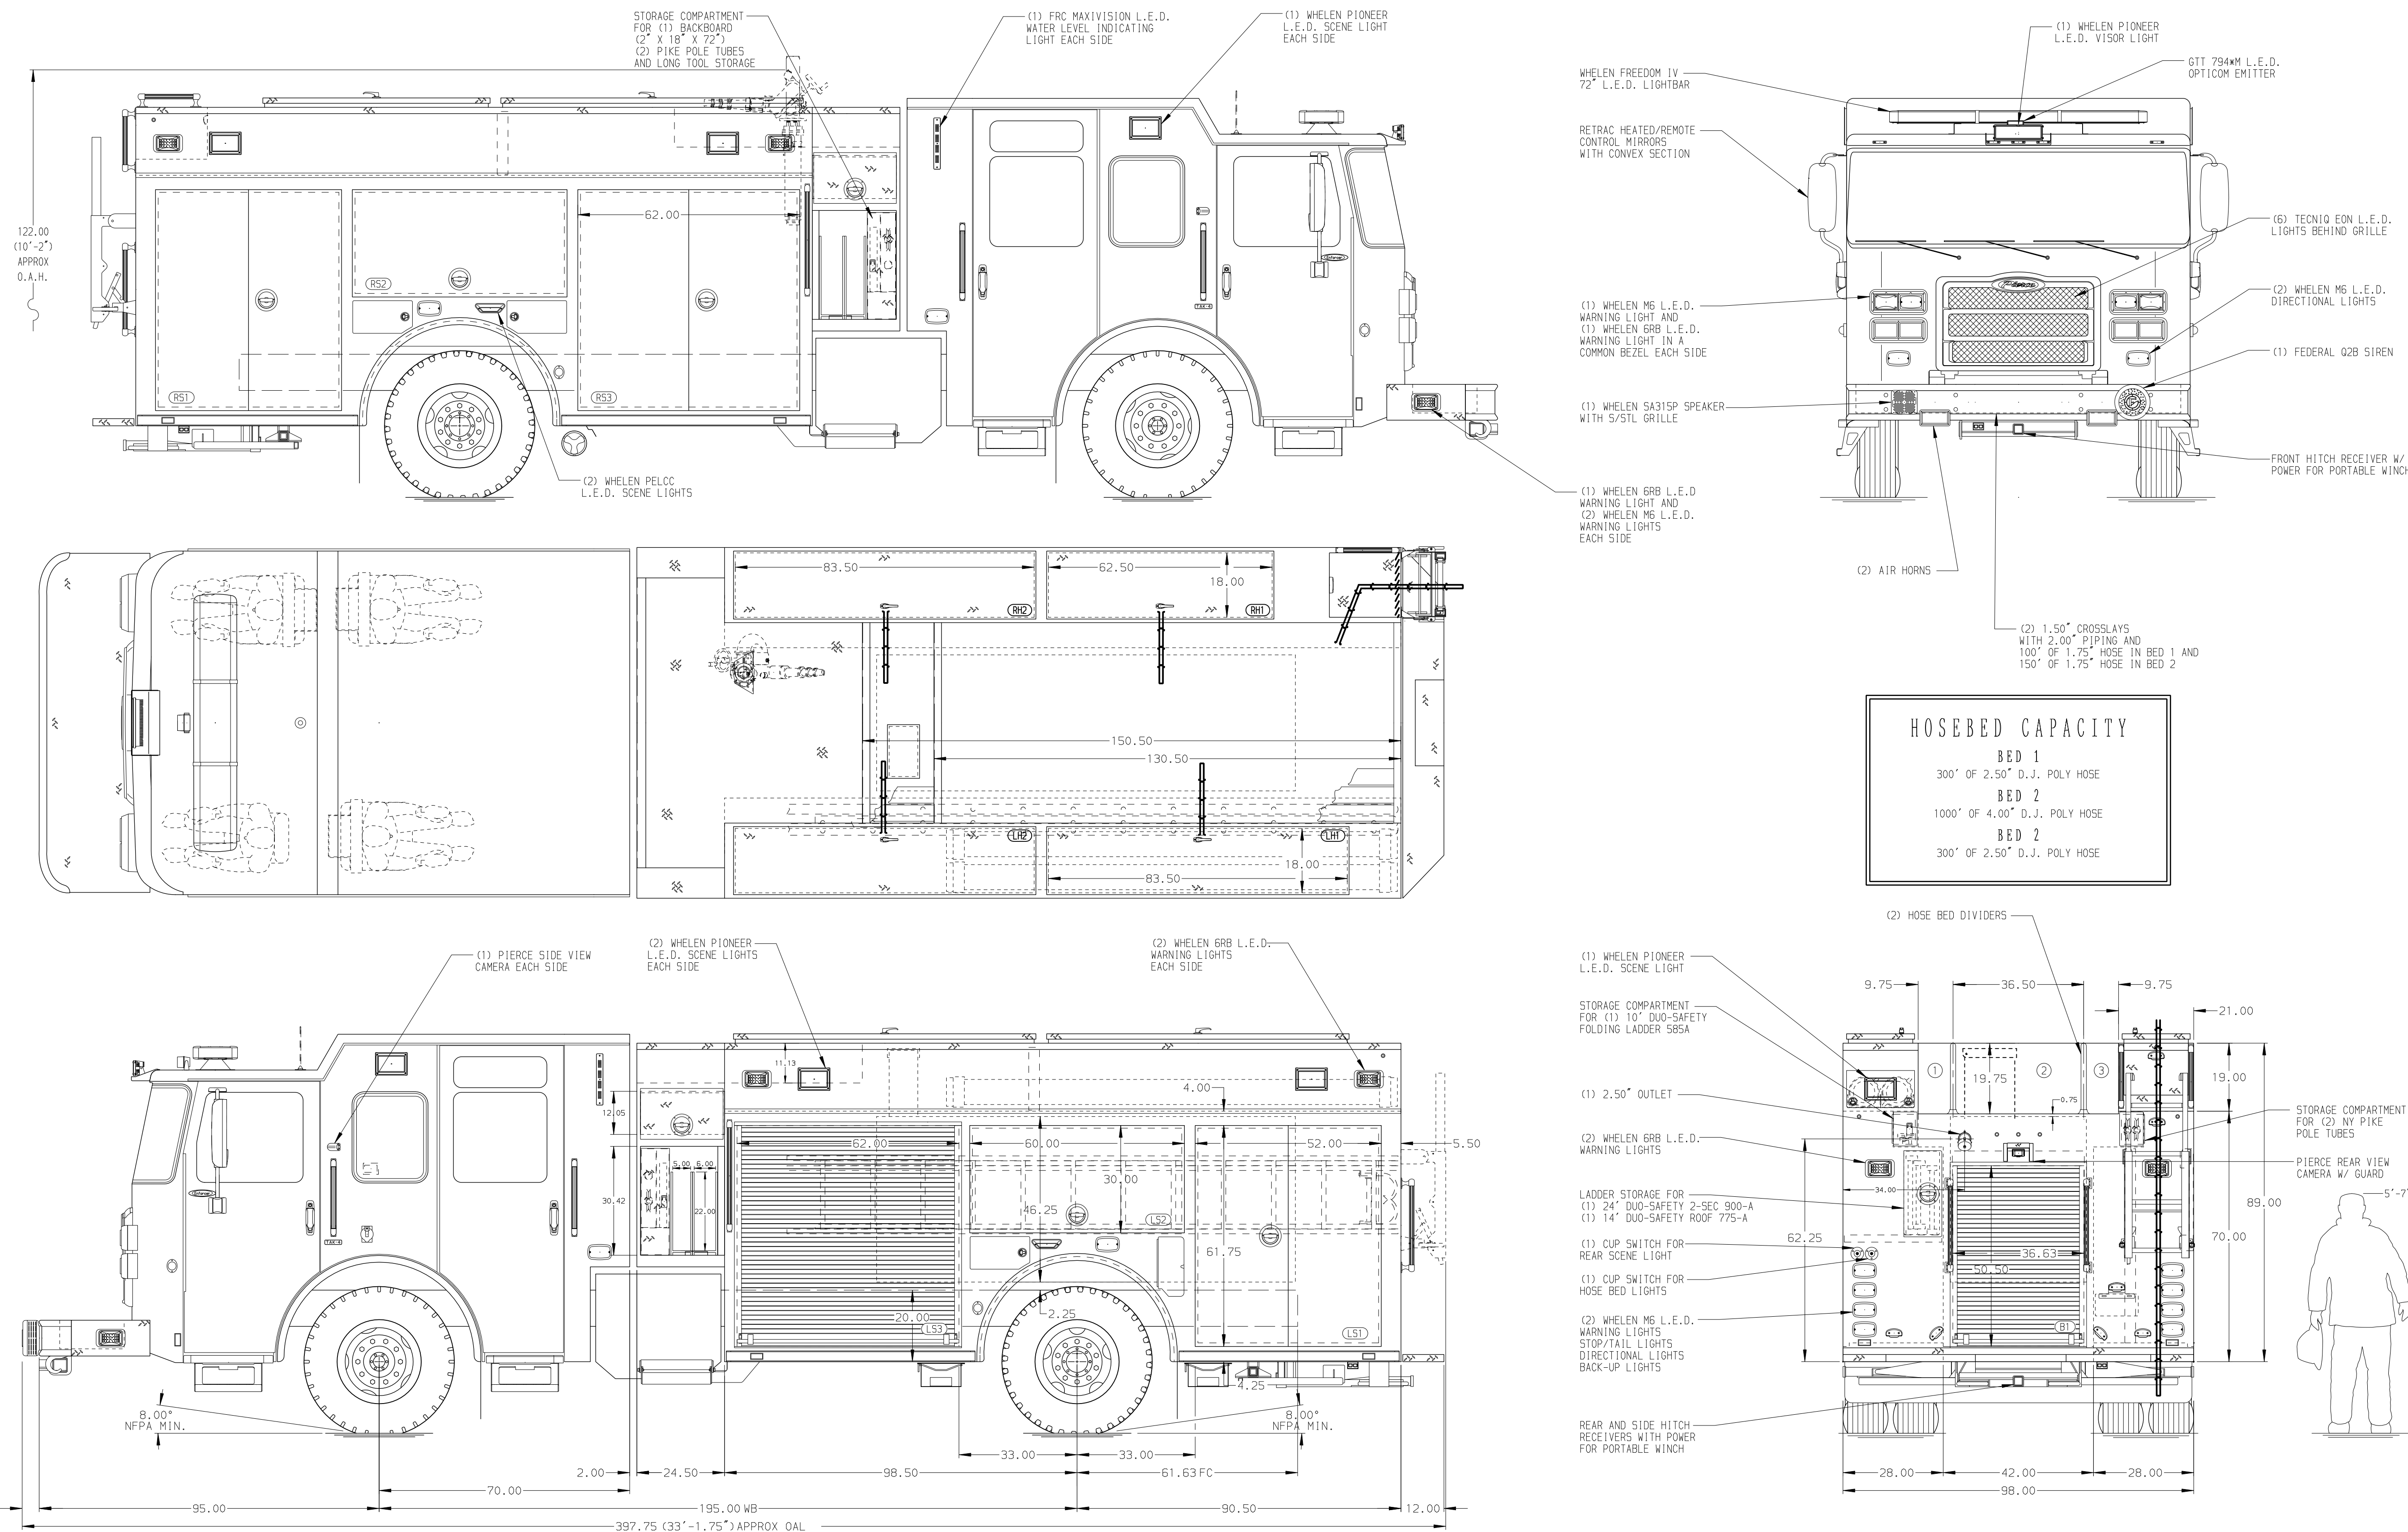

HOSEBED CAPACITY	
BED 1	300' OF 2.50" D.J. POLY HOSE
BED 2	1000' OF 4.00" D.J. POLY HOSE
BED 2	300' OF 2.50" D.J. POLY HOSE

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- SHORELINE RECEPTACLE LOCATED ON DRIVER'S SIDE OF CAB
- AIR INLET/OUTLET WITH DISCONNECT COUPLING LOCATED ON DRIVER SIDE PUMP PANEL
- BATTERY CHARGER/INVERTER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR DISPLAYED THRU DRIVER SIDE WINDOW
- SIX ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
- FOUR FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER SHOP ORDER
- TWO TILTING/SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
- ONE SLIDE-OUT TOOLBOARD LOCATED PER SHOP ORDER
- ALUMINUM PEGBOARD LOCATED PER SHOP ORDER
- WHELEN HOWLER SPEAKER SYSTEM LOCATED PER SHOP ORDER

REV	DATE	BY	CH	ENFORCER
14FEB24	MMF	ZWE	DATA	CHASSIS
12SEP23	MMF	ZWE	PIERCE	FOR
07JUN23	MMF	ZWE	MODEL	ENFORCER

		JOB NO.	38890
		SCALE	DATE
TITLE	Pierce PUC Pumper Approval Drawing	DRAWN BY	MMF
FOR	Sanford Fire Department	CHECKED BY	COL
DWG NO.	38890AD	SHEET SIZE	SHEET NO.
		D	1 OF 1