PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM 18,000 lb Dana Axle

AXLE, REAR

27,000 lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

Non Extended Stainless Steel

CAB

6010 Enforcer Cab

BODY

WATER TANK

COMPT, PUMPER, REAR

500 Gallon Poly Water Tank

30.75" FF Rollup Rear Compt

COMPT, PUMPER, DRIVER SIDE 152″ Rollup Full Height & Depth Front, Full Height Rear FDLER

COMPT, PUMPER PASS. SIDE 152" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

45" Control Zone Top Mount

PUMPHOUSE

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

1.50" Crosslays Not Required

CROSSLAYS, 2.50" 2.50" Crosslay Not Required

SPEEDLAYS
(2) 1.50" w/ Poly Trays, Standard Capacity
Side Outlets

GENERATOR


Generator Not Required

Foam System Husky 3 Single Agent Foam System

Foam Cell

20 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

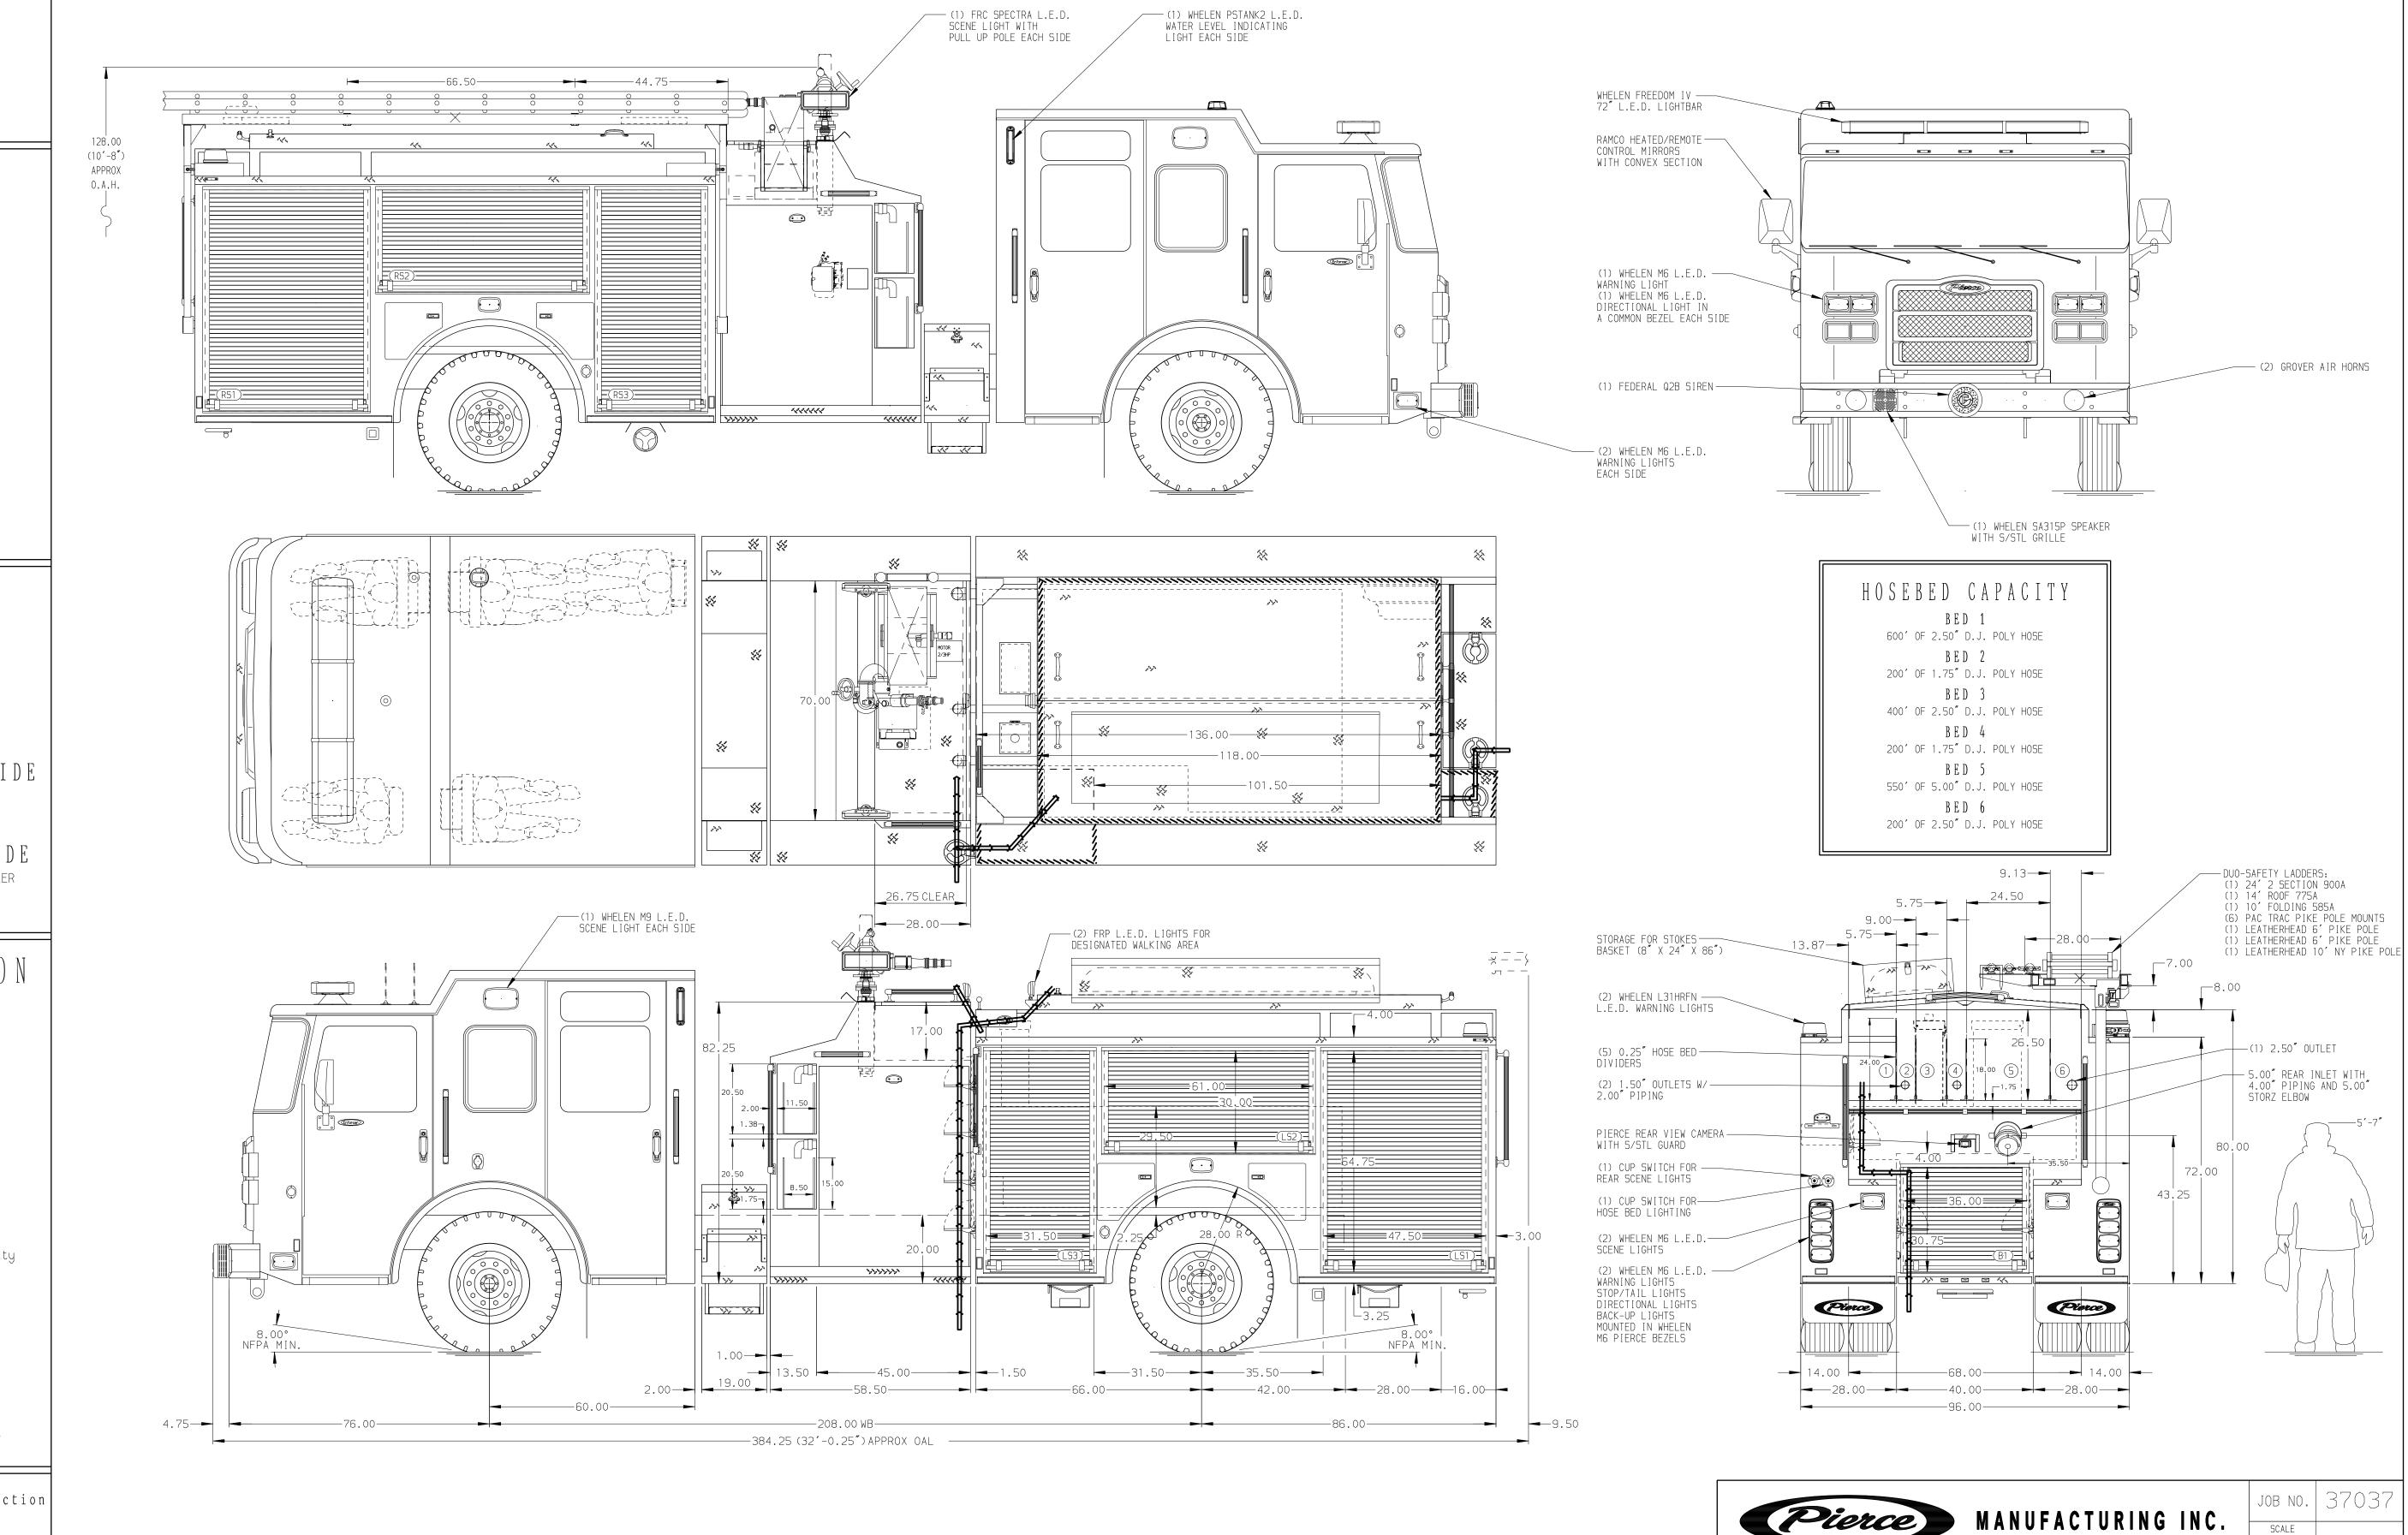

DATE

07SEP21

7SEP21

SHEET NO.

1:24

DRAWN BY

MMF

CHECKED BY

COL

SHEET SIZE

Pierce Pumper Approval Drawing

Richland Fire and Emergency Service

37037AD

CHASSIS

DATA

MAKE

PIERCE

MODEL

LENFORCER NO.

A | 16N0V21 | MMF | DTS

REV DATE BY CH

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS

AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

. AUTOMATIC TIRE CHAINS . SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB . AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
. XANTREX INVERTER LOCATED PER SHOP ORDER
. CIRCUIT BREAKER PANEL LOCATED PER SHOP ORDER

O. HANNAY BOOSTER REEL MODEL EF20-30-31 WITH 2/3 HP MOTOR LOCATED IN CARGO AREA FOR 150' OF 1.00" BOOSTER HOSE

EIGHT ADJUSTABLE SHELVES LOCATED PER SHOP ORDER

ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER

B. ALUMINUM PEGBOARD LOCATED PER SHOP ORDER

TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER

ONE TILTING/SLIDE-OUT TRAY LOCATED PER SHOP ORDER THREE 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER ONE 120V 5-PLACE RECEPTACLE STRIP LOCATED PER SHOP ORDER 14. FEDERAL RUMBLER-3 SPEAKER LOCATED BEHIND BUMPER
15. TWO TOOLBOARDS ADDED TO SLIDE-OUT TRAYS PER SHOP ORDER
16. ONE ANGLED REMOVEABLE INSERT IN TRAY PER SHOP ORDER TWO ALUMINUM PEGBOARDS LOCATED TRAYS PER SHOP ORDER 18. ALUMINUM REINFORCEMENT LOCATED ON UPPER REAR TANK WALL OF RS1 9. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT 20. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER ONE FLAG HOLDER WITH PIPE AND PIN MOUNTED AT FINAL INSPECTION