

Saber FR Chassis

27,000 lb Meritor Axle

450 HP Cummins L9 Engine

ALLison 5th Gen, 3000 EVS P

19" Extended Stainless Steel

7010 Saber FR Cab

980 Gallon Poly Water Tank

161" Rollup Full Height Front & Rear FDLER

161" Rollup Full Height Front & Rear FDLER

52" Control Zone Side Mount

1500 GPM Waterous CSU

(2) 1.50" Standard Capacity


(1) 2.50" Standard Capacity

Speedlays Not Required

Generator Not Required

Husku 3 Single Agent Foam System

20 Gallon Foam Cell, Reduced Water

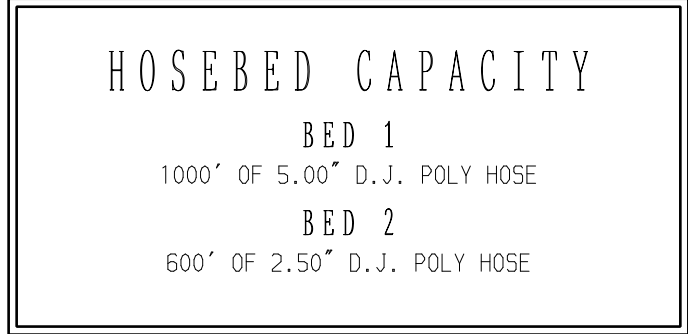

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OULET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT Riser
6. ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. 2.00 MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
8. MOUNTING PROVISIONS FOR FRONT INLET
9. MOUNTING PROVISIONS FOR WALL BURN INCH SCAN POWERLINE NS 3.0 10' ON CAB

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	DRAWN BY	12AUG21
				MAKE			JLA	
				PIERCE	FOR	Pierce Field Unit Bradenton, Florida	CHECKED BY	12AUG21
							CGA	
	110CT21	JLA	CGA	MODEL	DWG		SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	SABER FR	NO.	37044AD	D	1 OF 1