PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM
20,000 lb Dana Axle

AXLE, REAR
27,000 lb Dana Axle

ENGINE
500 HP Cummins X12 Engine

TRANSMISSION
Allison 6th Gen, 4000 EVS P

BUMPER
16" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
750 Gallon Poly Tank

WATER CAPACITY
720 Gallons of Water

FOAM CELL
30 Gallon Foam Cell

COMPT, PUMPER, REAR
30.75" FF Lap Rear Compt

COMPT, PUMPER, LEFT SIDE
171" Lap Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE
171" Lap Full Height & Depth Front & Rear

FIRE SUPPRESSION

PUMPHOUSE
48" Control Zone Side Mount

PUMP
1500 GPM Hale QMAX

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
2.50" Crosslay Not Required

SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

FOAM SYSTEM
Husky 3 Single Agent Foam System

SAFETY

Frontal Impact Protection

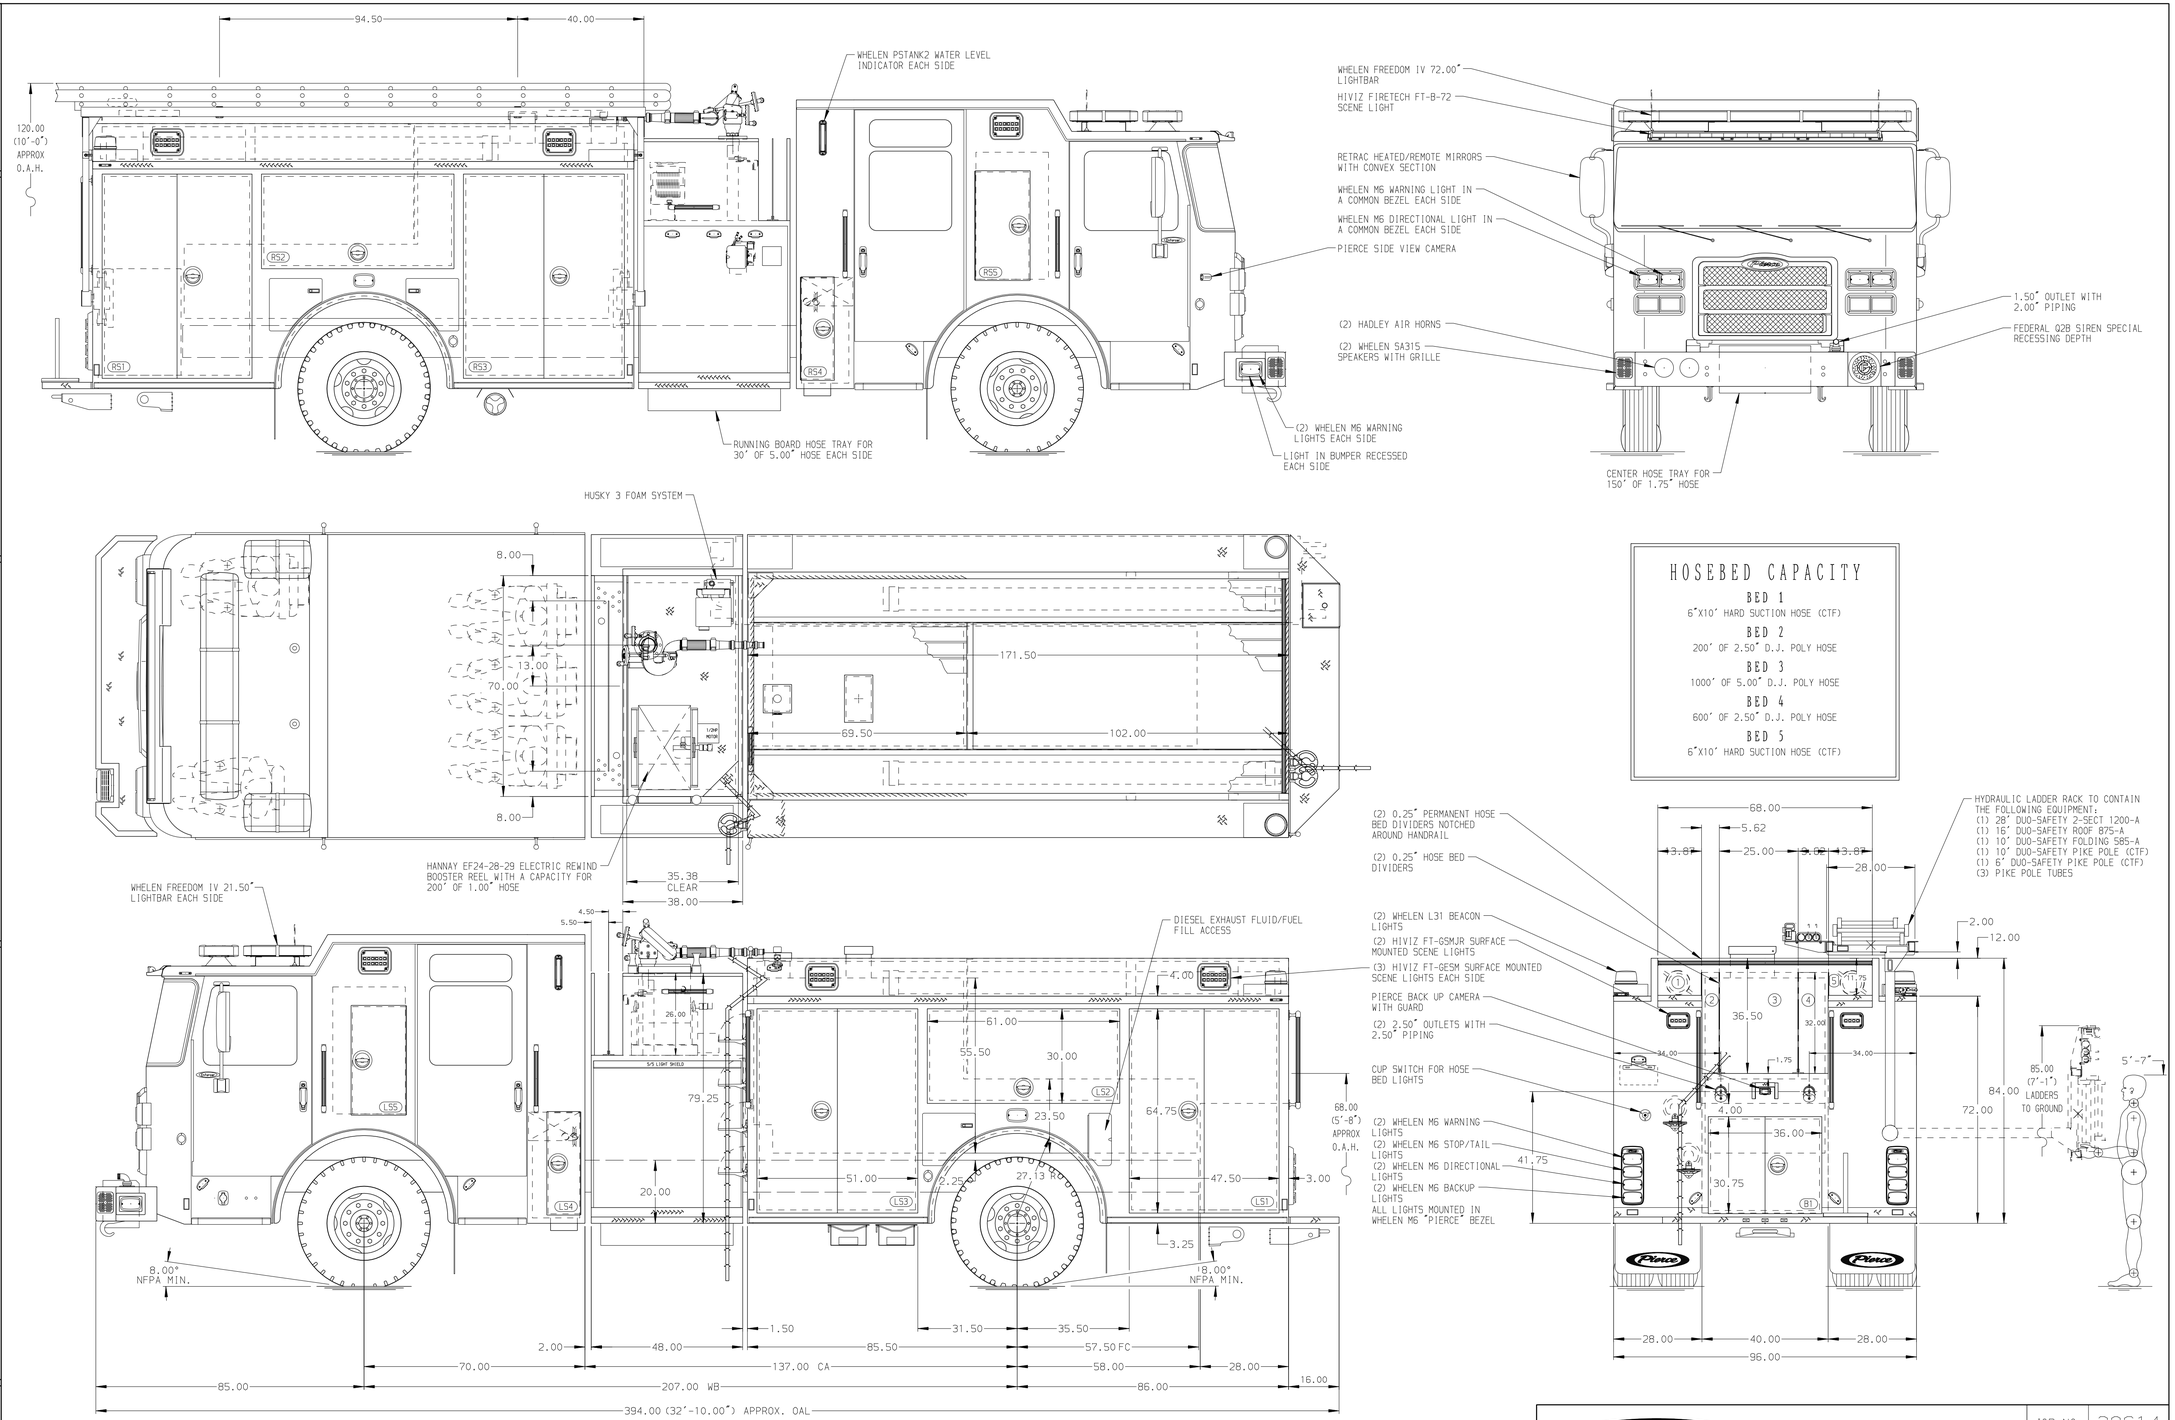

HOSEBED CAPACITY

BED 1
6"X10' HARD SUCTION HOSE (CTF)

BED 2
200' OF 2.50" D.J. POLY HOSE

BED 3
1000' OF 5.00" D.J. POLY HOSE

BED 4
600' OF 2.50" D.J. POLY HOSE

BED 5
6"X10' HARD SUCTION HOSE (CTF)

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. TWO 120V DUPLEX RECEPTACLES LOCATED IN CAB PER ORDER
2. TWO 120V DUPLEX RECEPTACLES IN REAR BODY COMPARTMENT LOCATED PER ORDER
3. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
4. AIR OUTLET WITH DISCONNECT FITTING LOCATED ON LEFT SIDE PUMP PANEL PER ORDER
5. BATTERY CHARGER LOCATED PER ORDER
6. BATTERY CHARGER INDICATOR LOCATED PER ORDER
7. SIX FULL WIDTH/DEPTH ADJUSTABLE SHELVES WITH SIDES LOCATED PER ORDER
8. FOUR ADJUSTABLE TILT/SLIDE-OUT TRAYS LOCATED PER ORDER
9. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH SIDES LOCATED PER ORDER
10. TWO SLIDE-OUT TOOLBOARDS WITH PEGBOARD PATTERN LOCATED PER ORDER
11. TWO PARTITIONS LOCATED PER ORDER
12. TWO VERTICAL PARTITIONS LOCATED PER ORDER
13. TWO STORAGE BINS LOCATED PER ORDER
14. TWO ADJUSTABLE VERTICAL PARTITION HOSE SLOTS LOCATED PER ORDER
15. ONE AIR BAG RACK FOR HOLDING (3) AIR BAGS LOCATED PER ORDER
16. ONE LAZY SUSAN TURNTABLE LOCATED PER ORDER

REV	DATE	BY	CH
B	16APR24	BST	JKR
A	14FEB24	BST	JGO

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE	Pierce Pumper Approval Drawing –	JOB NO.	39614
		SCALE 1:24	DATE
FOR	Central Campbell Fire District –	DRAWN BY BST	14NOV23
		CHECKED BY AMI	14NOV23
DWG NO.	39614AD	SHEET SIZE D	SHEET NO. 1 OF 1

View File Created 16-APR-2024 10:28:30