PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE,FRONT,CUSTOM
19,500 lb Meritor Axle

AXLE,REAR
27,000 lb Meritor Axle

ENGINE
450 HP Cummins L9 Engine

TRANSMISSION
Allison 6th Gen, 3000 EVS P

BUMPER
19" Extended Painted Steel

CAB
8410 Enforcer Cab

BODY

WATER TANK
750 Gallon New York Style Water Tank

COMPT,PUMPER,REAR
30.75" FF Rollup Rear Compt

COMPT,PUMPER,LEFT SIDE
171" Rollup Full Height & Depth Front & Rear BIB

COMPT,PUMPER,RIGHT SIDE
171" Rollup Full Height & Depth Front & Rear

FIRE SUPPRESSION

PUMPHOUSE
45" Control Zone Side Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS,1.50"
(2) 1.50" Standard Capacity

CROSSLAYS,2.50"
(1) 2.50" Standard Capacity

SPEEDLAYS
SpeedLays Not Required

GENERATOR
Generator Not Required

Foam System
Foam System Not Required

Foam Cell
Foam Cell Not Required

Side Roll and Frontal Impact Protection

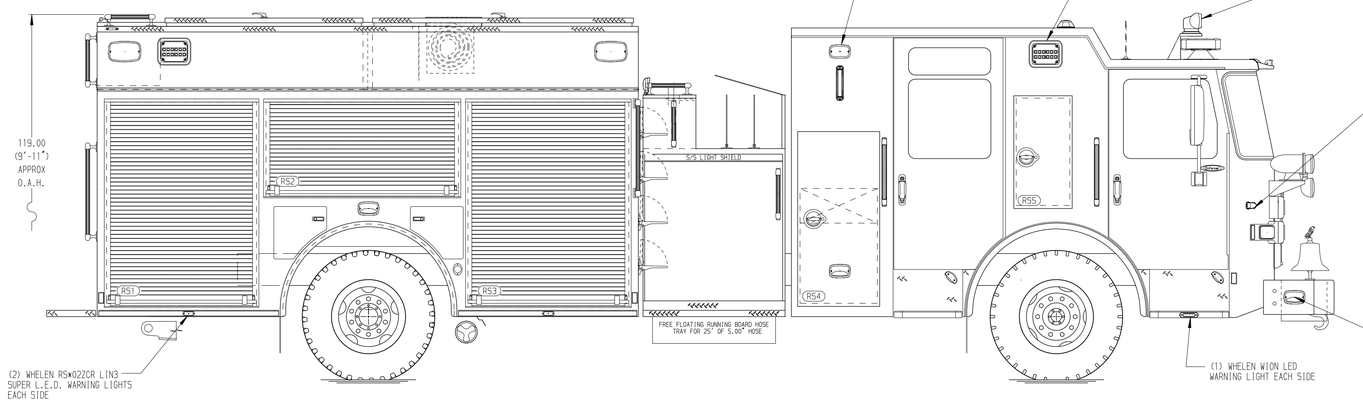

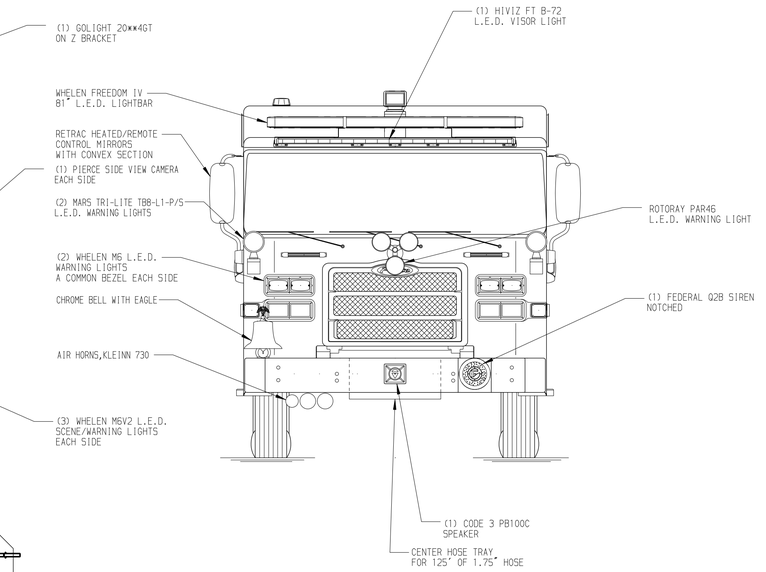

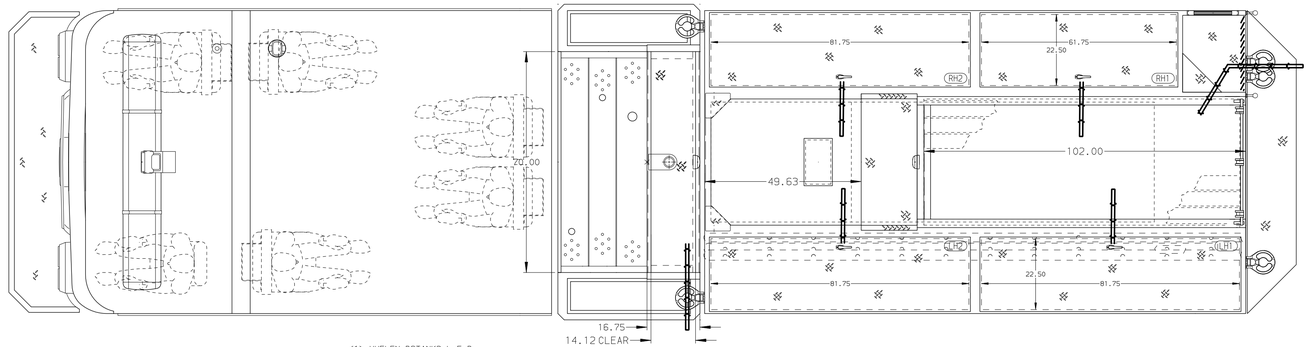

HOSEBED CAPACITY

BED 1
700' OF 4.00" D.J. POLY HOSE

BED 2
300' OF 2.50" D.J. POLY HOSE

BED 3
600' OF 3.00" D.J. POLY HOSE

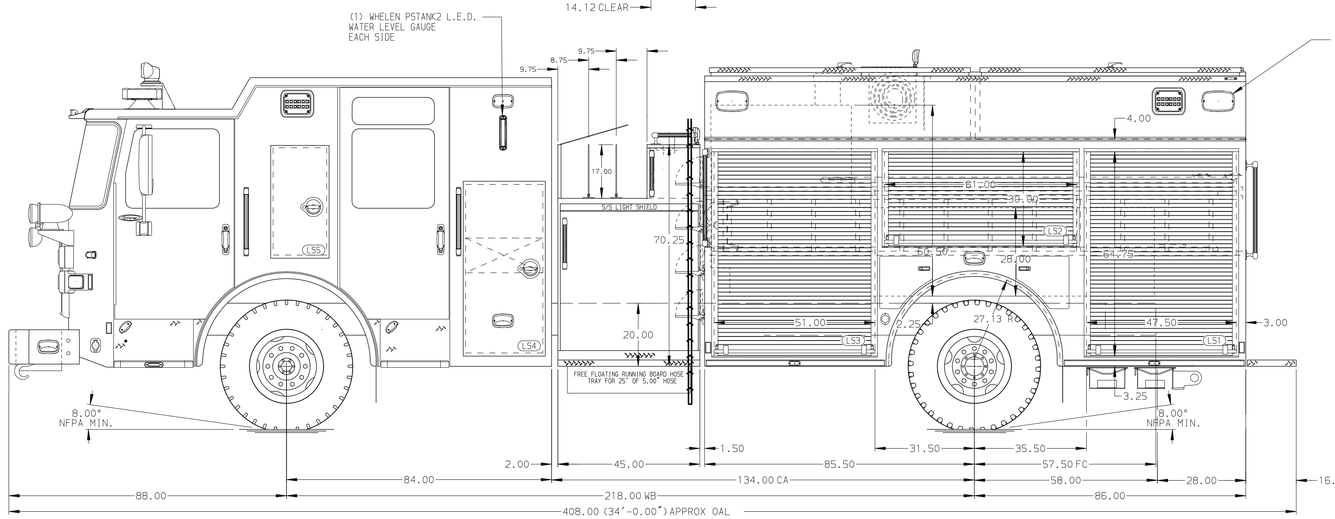

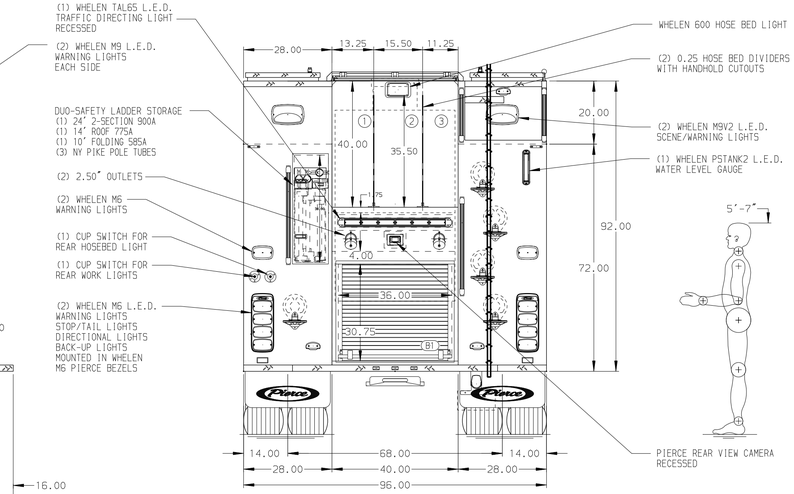

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 2.50 OUTLET WITH 2.50 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. THREE ADJUSTABLE SHELVES LOCATED PER ORDER
6. FIVE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
7. ONE CTECH FOUR DRAWER ASSEMBLY LOCATED PER SHOP ORDER
8. ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER

REV	DATE	BY	CH
V	09JUL24	MMF	CLM
V	19MAR24	MMF	CLM
V	24JAN24	MMF	CLM

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing
FOR: Lincolnwood Fire Department
DWG NO.: 39871AD

JOB NO.	39871
SCALE	1:24
DATE	
DRAWN BY	MMF
	230CT23
CHECKED BY	AM1
	250CT23
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 09-JUL-2024 13:49:21