
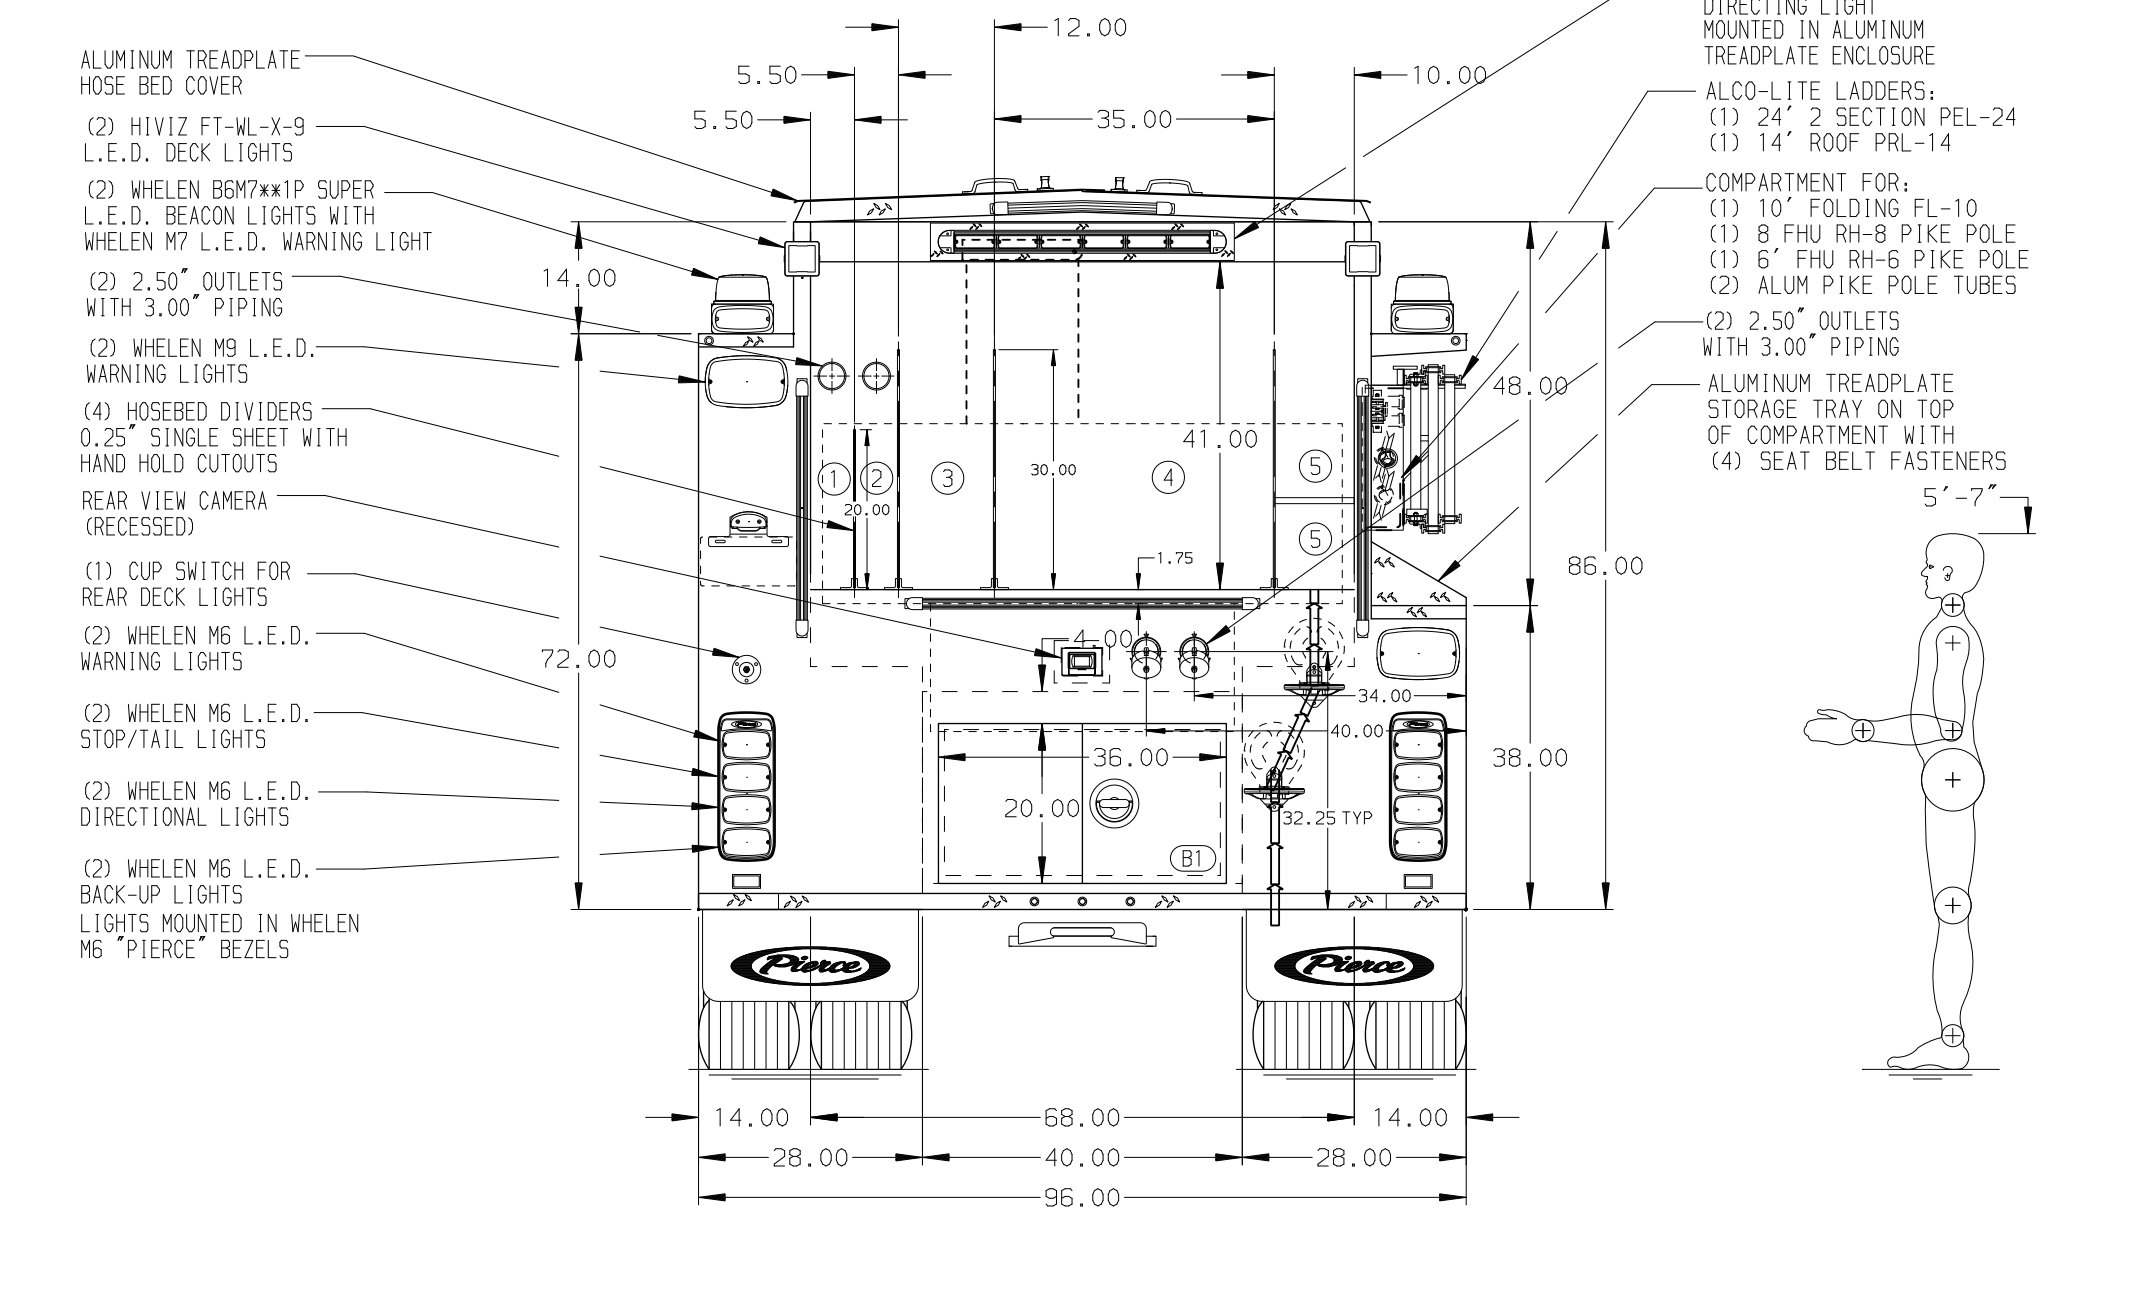


- HOSEBED CAPACITIES
- ① - 200' OF 1.75" D.J. POLY HOSE
 - ② - 200' OF 1.75" D.J. POLY HOSE
 - ③ - 600' OF 3.00" D.J. POLY HOSE
 - ④ - 1000' OF 5.00" D.J. POLY HOSE
 - ⑤ - 200' OF 2.50" D.J. POLY HOSE
- W/ 200' MORE ON TOP OF REMOVABLE SHELF

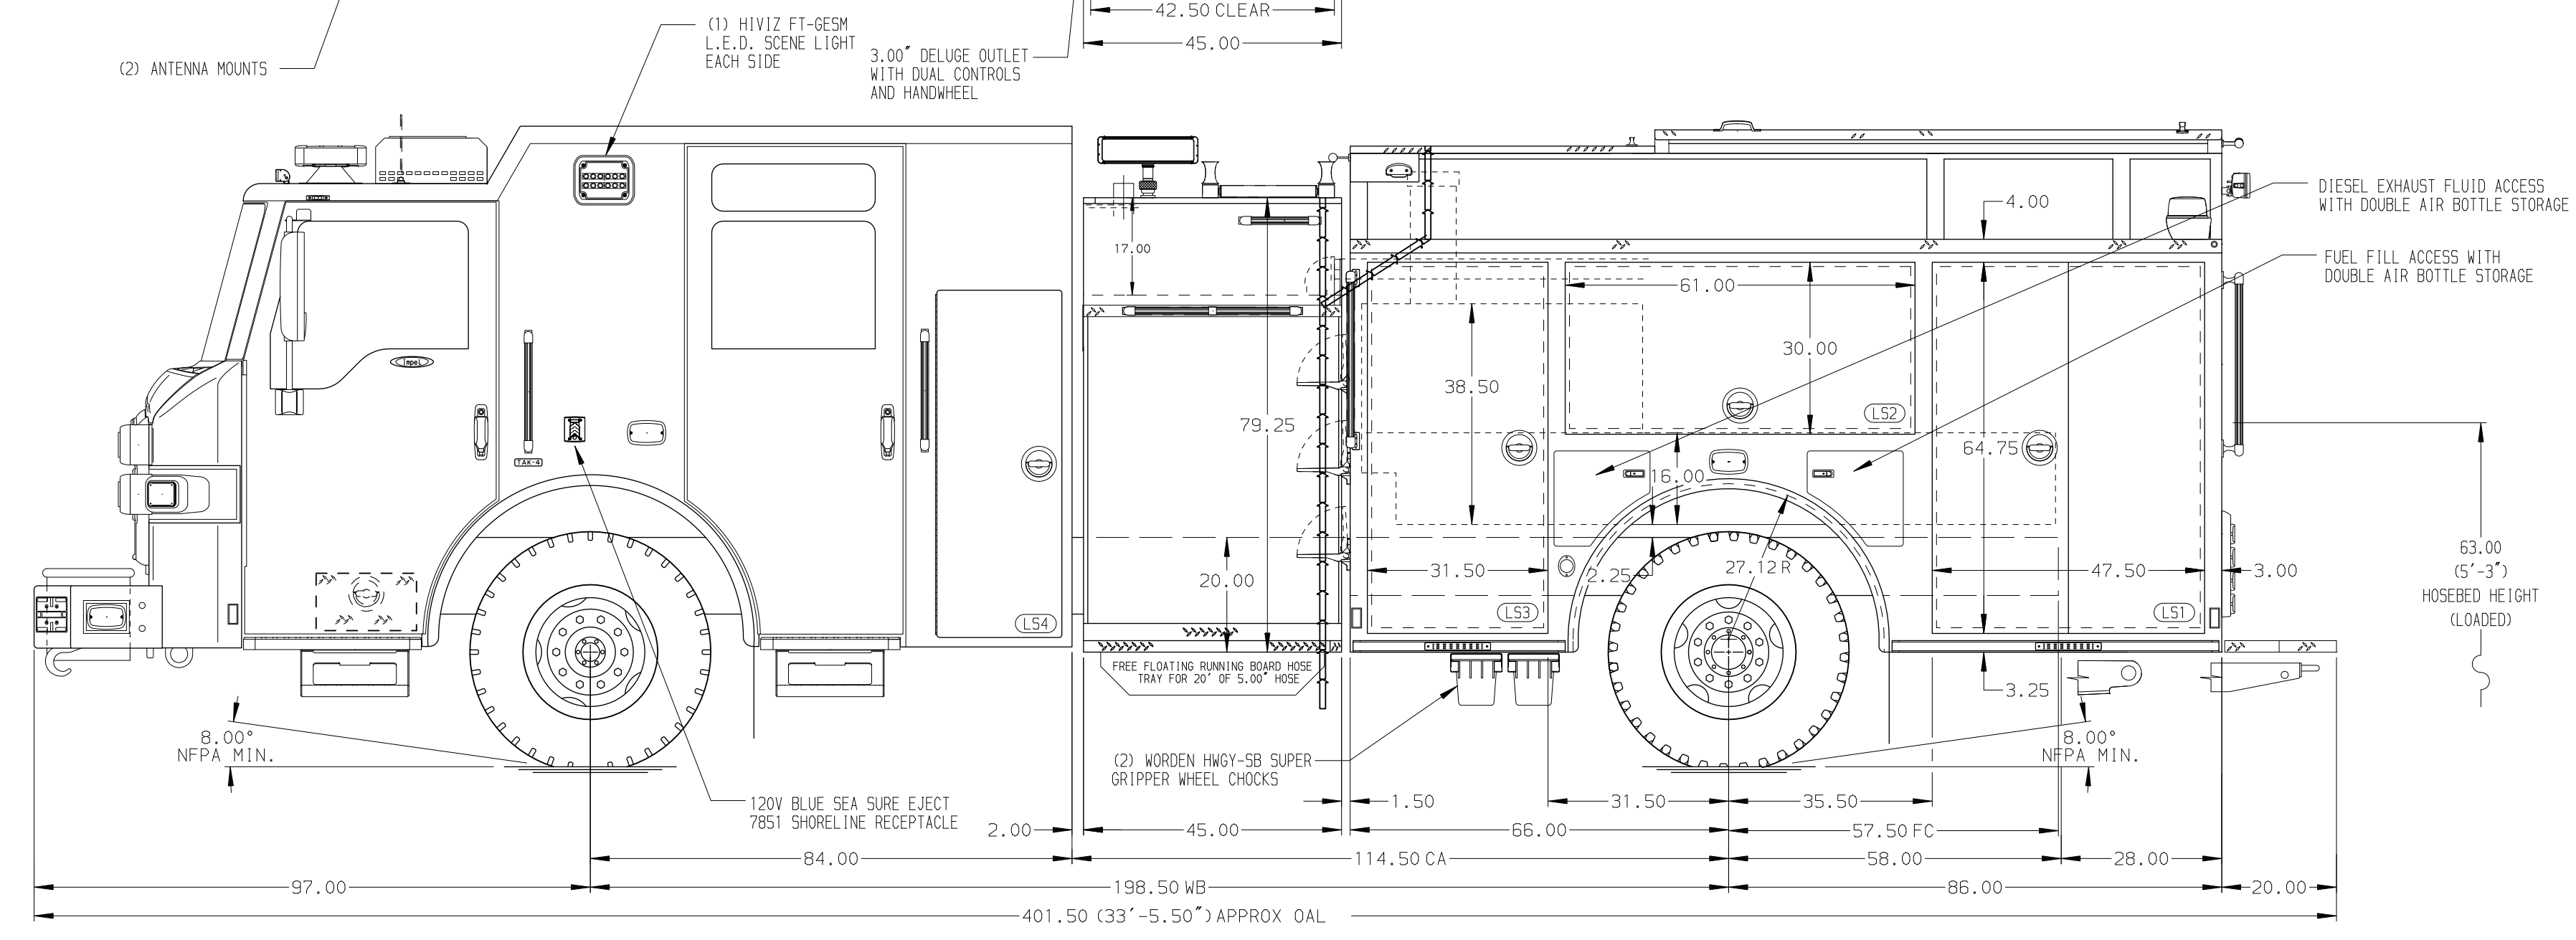

ALUMINUM BODY SIDE ROLL AND FRONTAL IMPACT PROTECTION

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____



JOB NO. 37298

SCALE 1:24 DATE

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
2. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
3. FIVE FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER ORDER
4. ONE ADJUSTABLE SLIDE-OUT TRAY LOCATED PER ORDER
5. THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
6. ONE SWING-OUT ALUMINUM TOOL BOARD LOCATED PER ORDER
7. ONE ALUMINUM MOUNTING PLATED LOCATED PER ORDER
8. ONE PARTITION LOCATED BETWEEN L51/B1 AND R51/B1
9. ALUMINUM PEGBOARD WITH TRACK LOCATED PER ORDER
10. ONE HOSE STORAGE RACK LOCATED PER ORDER
11. XANTREX PROSINE INVERTER LOCATED PER ORDER
12. FOUR 120V DUPLEX RECEPTACLE LOCATED PER ORDER
13. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED ON DRIVER'S SIDE PUMP PANEL
14. POST/FIN STYLE MOUNTING FOR TRAFFIC CONES TO BE SHIPPED LOOSE

| REV | DATE | BY | CH | IMPEL FR |
|-----|------|----|----|----------|
| | | | | |
| | | | | |
| | | | | |

TITLE 1750-D-500 GALLON WATERTANK, 152" FDLER BODY, RS LOW RS LADDER BRACKET, 45" PUMPHOUSE, DELUGE

FOR WILMINGTON FIRE DEPARTMENT - NC WILMINGTON, NORTH CAROLINA

DWG 37298AD

CHECKED BY LME 19APR22

CHECKED BY CDU 19APR22

SHEET SIZE D SHEET NO. 1 OF 1