
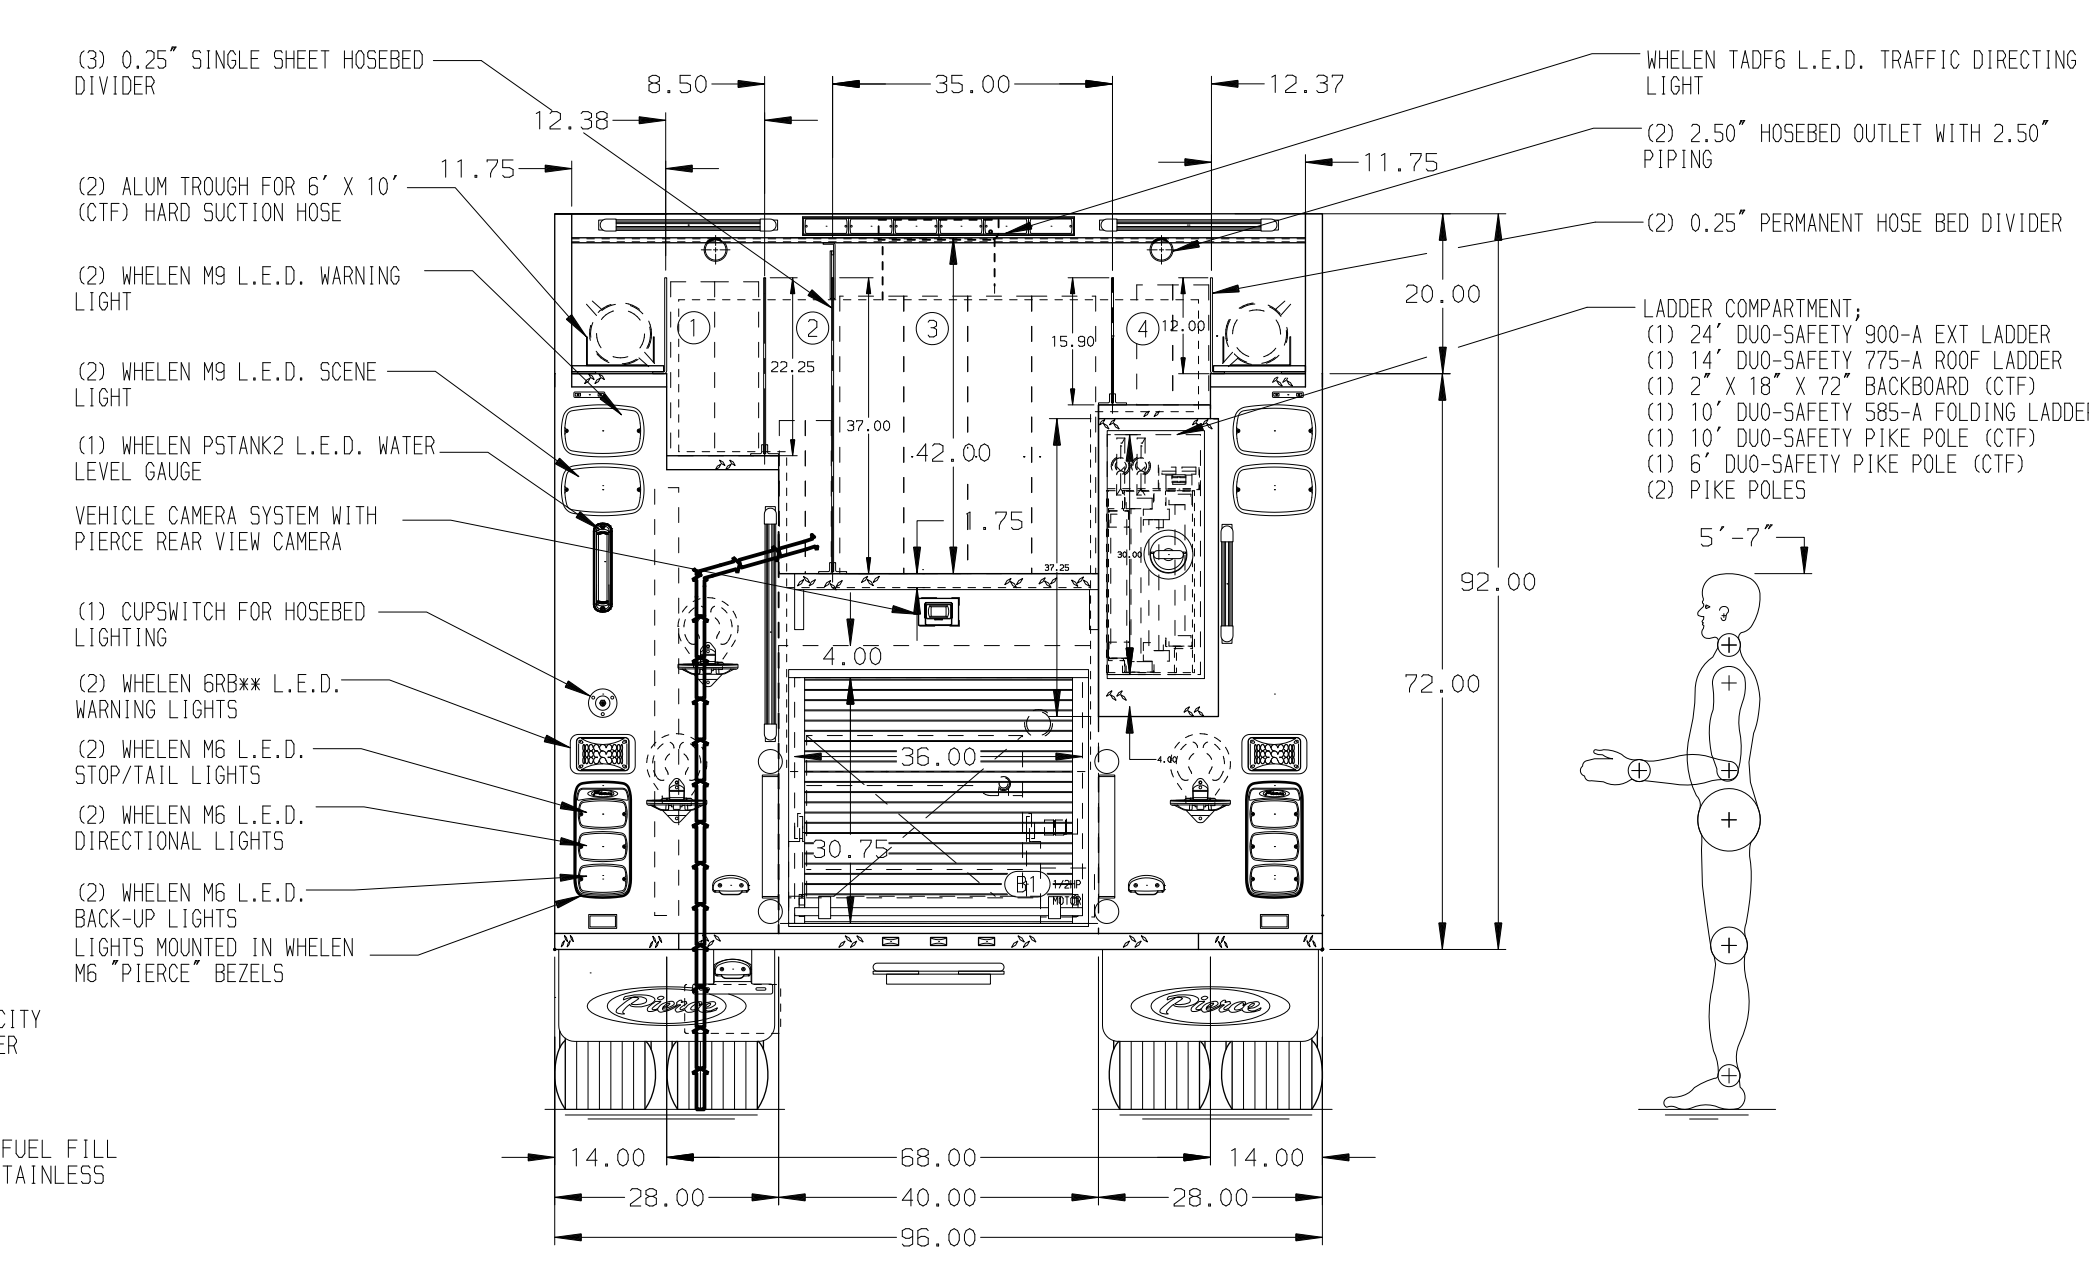


- HOSEBED CAPACITIES
- ① 300' OF 3.00" D.J. POLY HOSE
 - ② 300' OF 1.75" D.J. POLY HOSE
 - ③ 1000' OF 5.00" D.J. POLY HOSE
 - ④ 200' OF 2.50" D.J. POLY HOSE

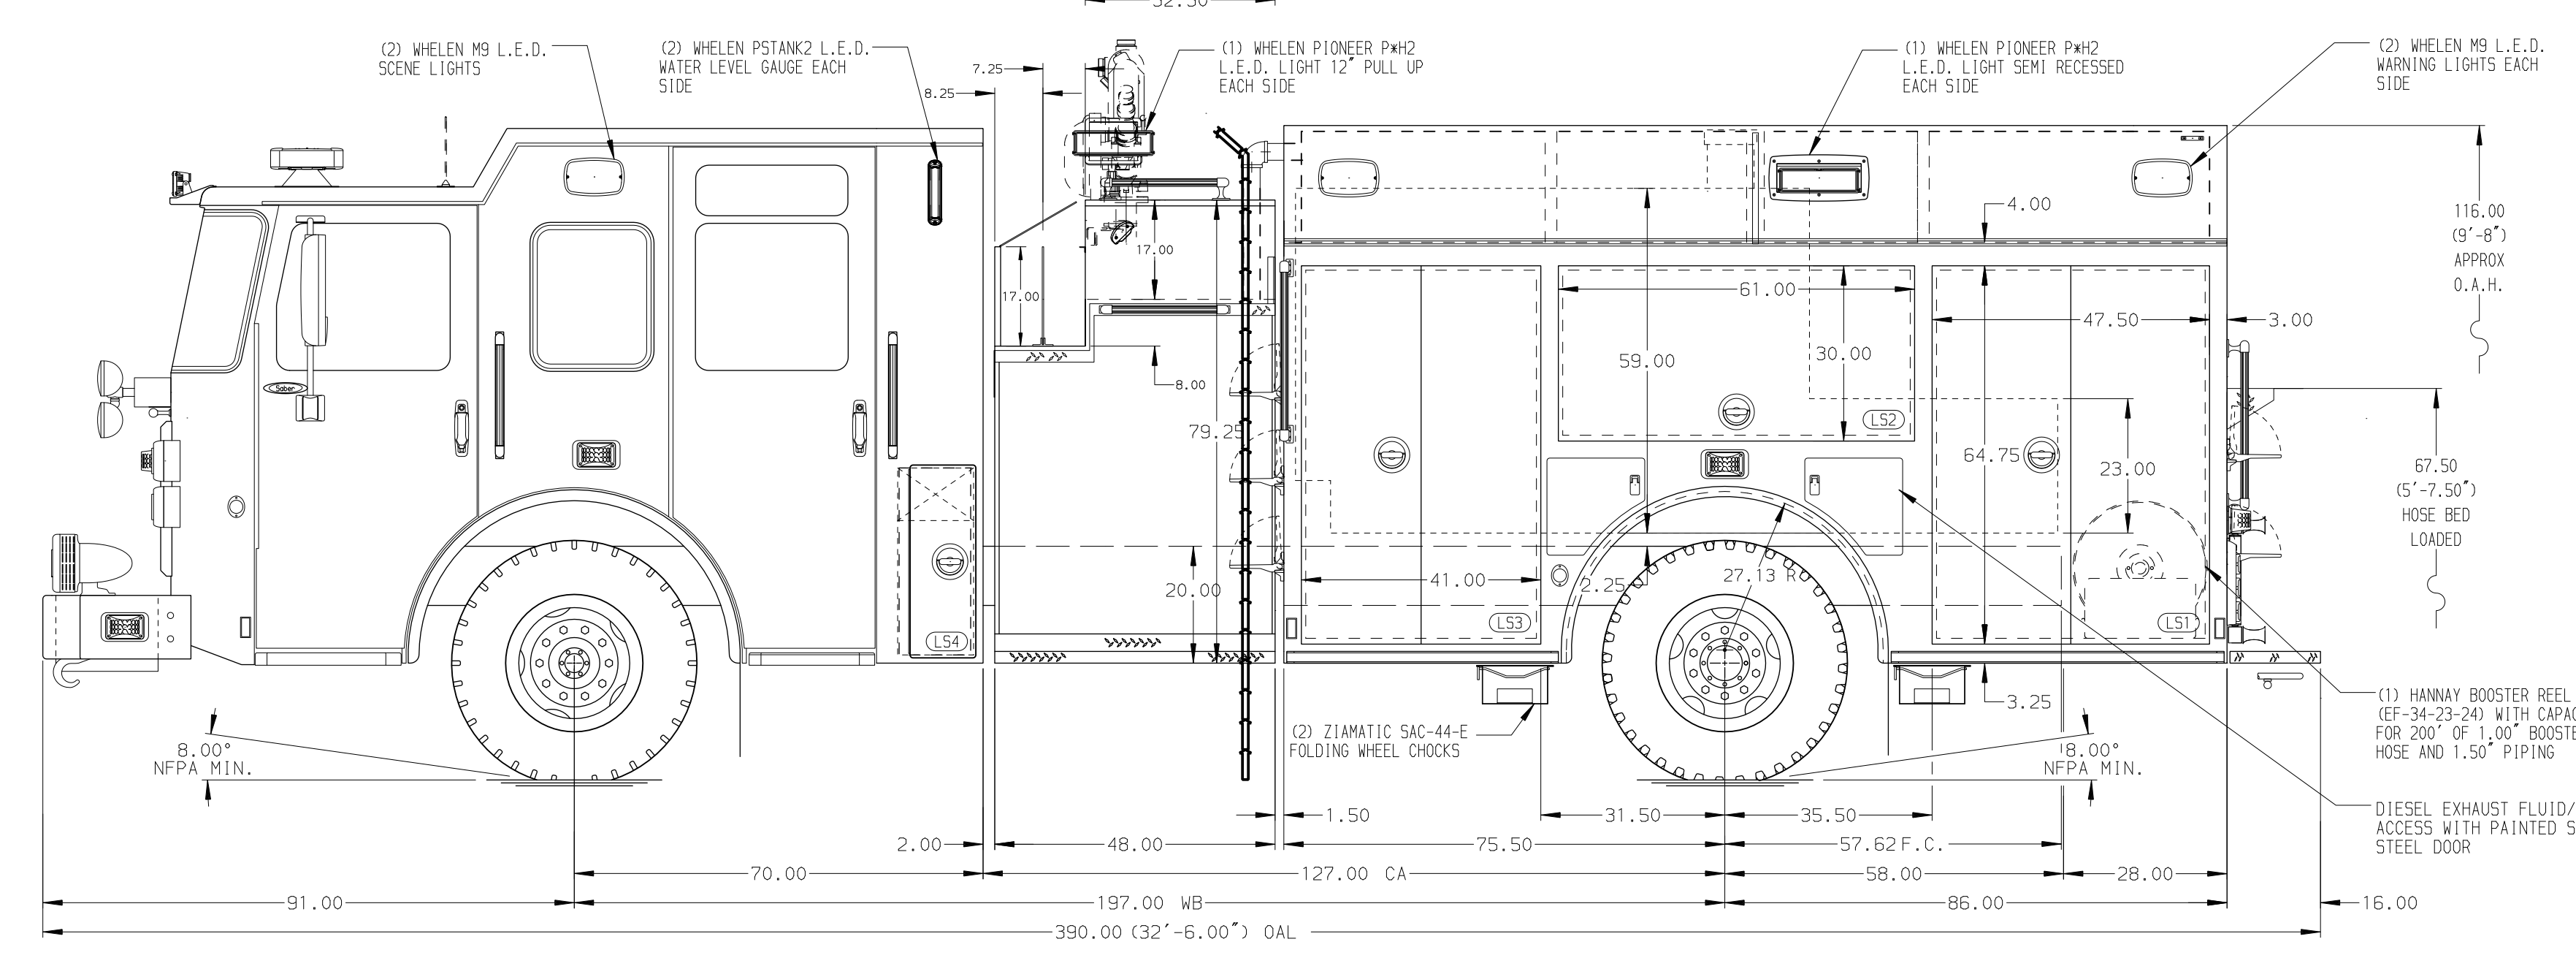

ALUMINUM BODY

MAXIMUM O.A.H. 116.00"

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. BATTERY CHARGING RECEPTACLE LOCATED ADJACENT TO BATTERY
- 2. L.E.D. LIGHT STRIP LOCATED ON THE FRONT OF THE HOSEBED
- 3. AIR INLET WITH DISCONNECT LOCATED IN DRIVER SIDE STEP WELL

CUSTOMER APPROVAL				
APPROVED BY:				
DATE:				
CHASSIS DATA	TITLE	2000-D-1000 GAL POLY, 161" FH FD W/ NOTCH LEFT SIDE, FH FDLER R.S., LDRS. BTWN. TANK & S. SHEET, (2) X-LAYS	FOR	BELTON FIRE DEPARTMENT BELTON, SOUTH CAROLINA
PIERCE	MODEL		DWG NO.	37350AD
SAVER FR				

Pierce MANUFACTURING INC.		JOB NO.	37350
SCALE	1:24	DATE	
DRAWN BY	JRC	CHECKED BY	EGO
			03FEB22
SHEET SIZE	D	SHEET NO.	1 OF 1