
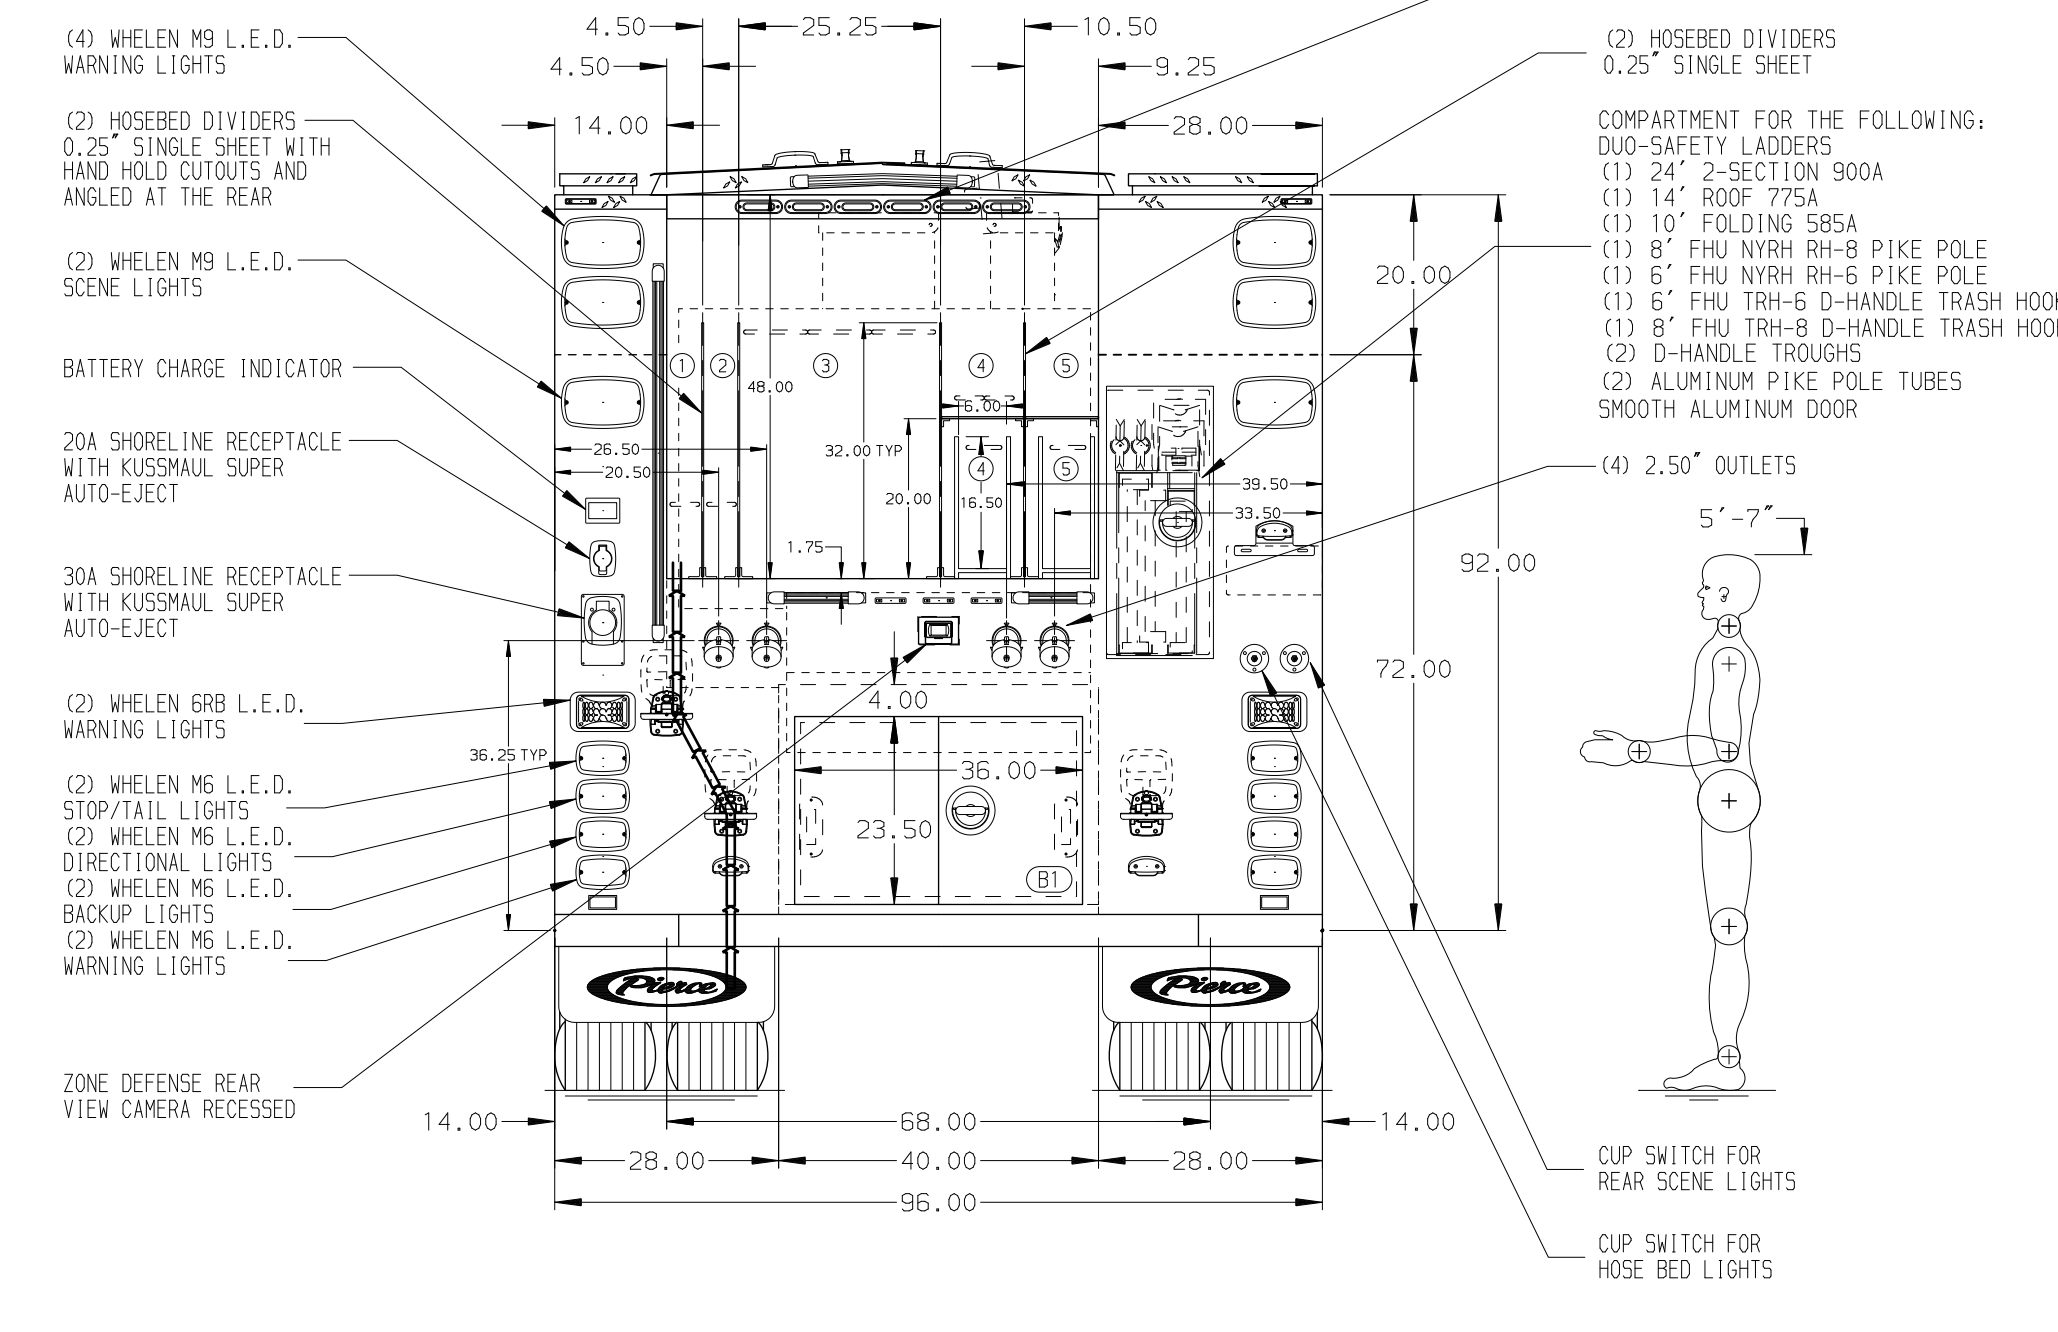


- HOSEBED CAPACITIES**
- ① - 200' OF 2.00" KEY COMBAT HOSE
 - ② - 200' OF 2.00" KEY COMBAT HOSE
 - ③ - 1000' OF 5.00" D.J. POLY HOSE
 - ④ - 300' OF 2.50" KEY COMBAT HOSE IN A POLY TRAY (BELOW) 100' OF 2.00" KEY COMBAT HOSE AND GATED WYE (ABOVE)
 - ⑤ - 300' OF 2.50" KEY COMBAT HOSE IN A POLY TRAY (BELOW) (3) 50' SECTIONS OF HIGH RISE PRO (ABOVE)

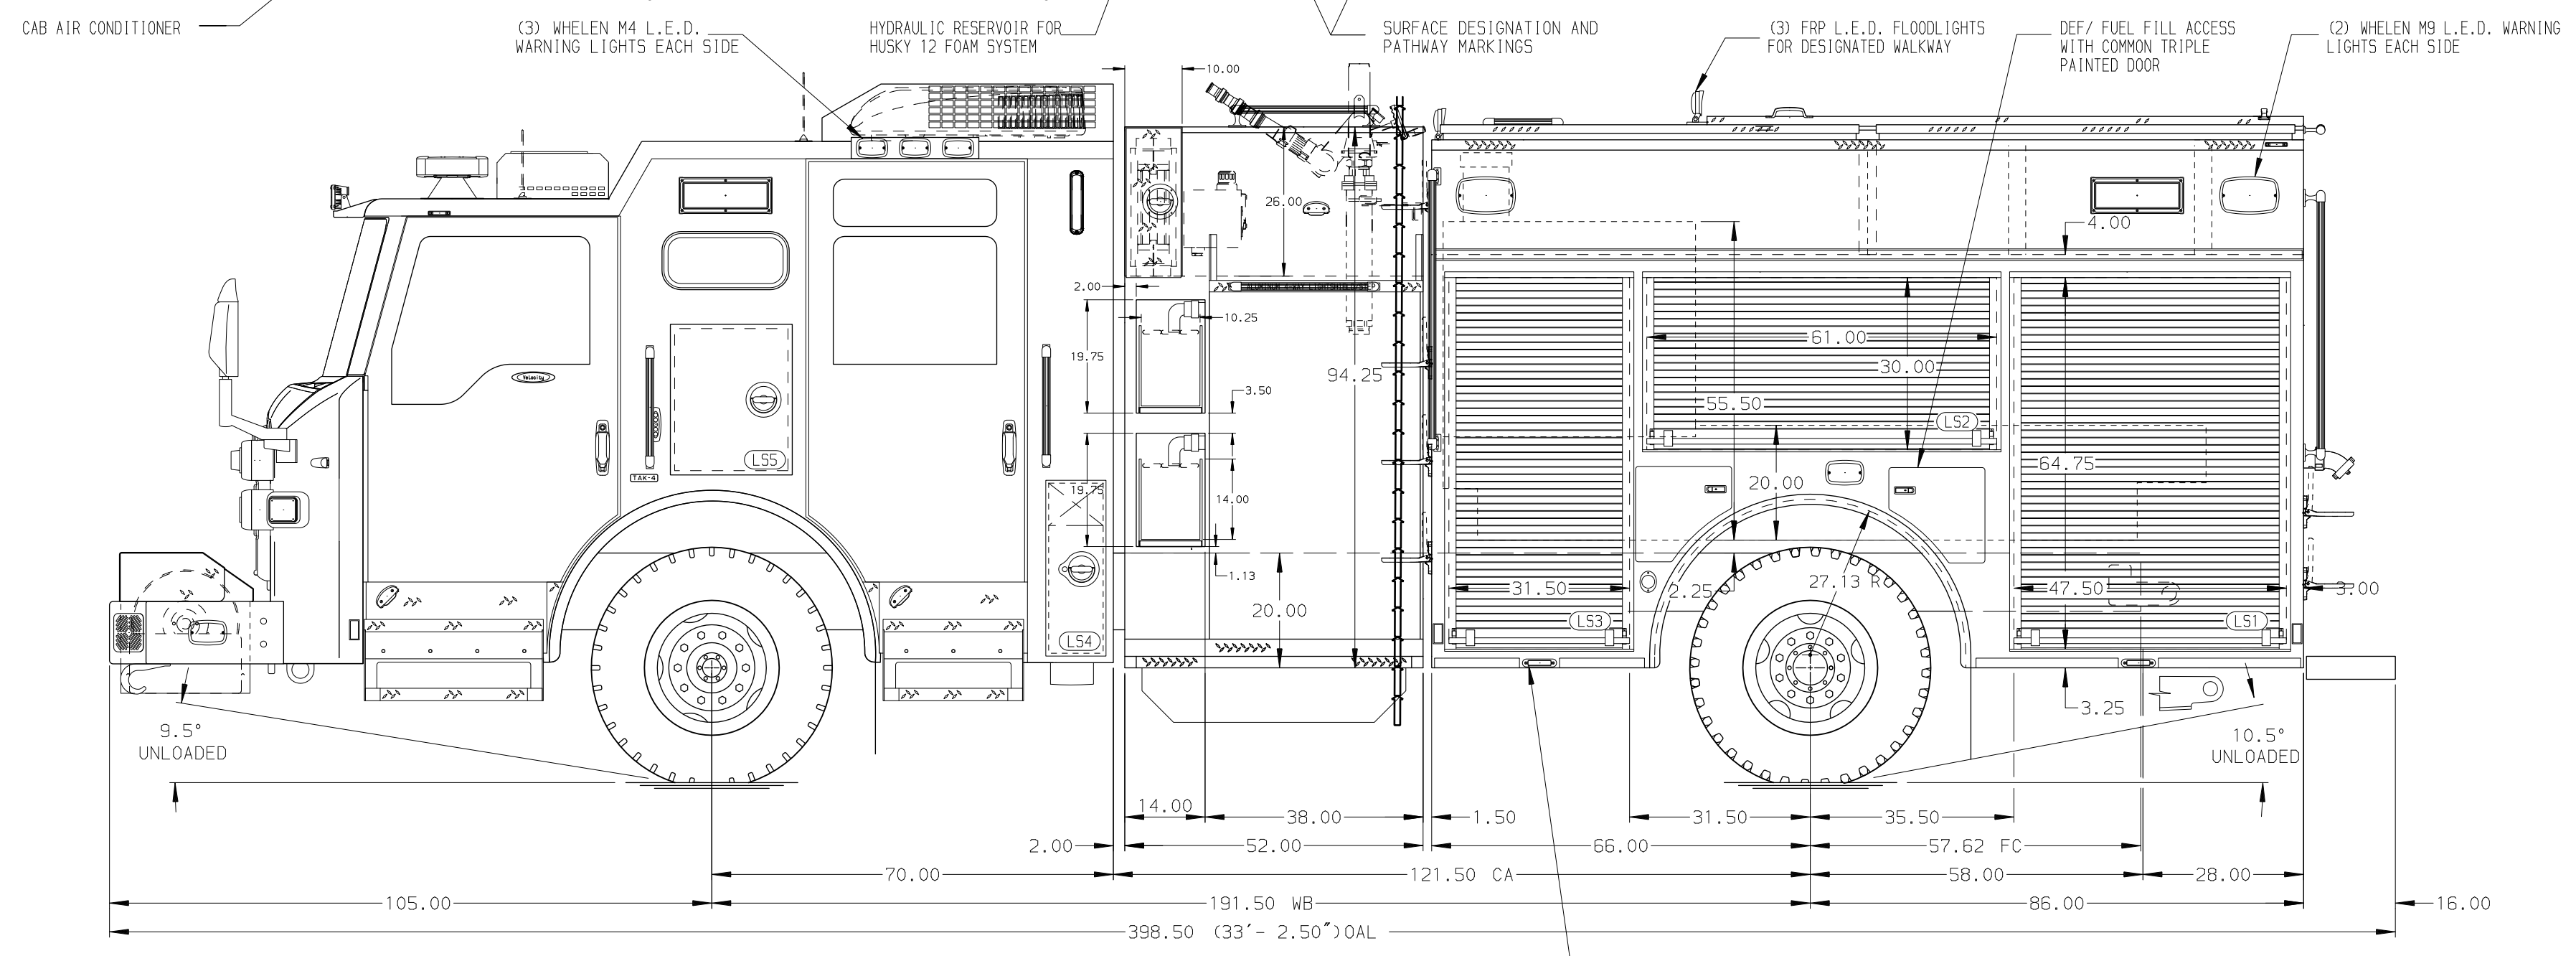

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. KUSSMAUL BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- 2. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 3. AIR INLET/OUTLET ON DRIVER'S SIDE PUMP PANEL
- 4. 120V 6-PLACE RECEPTACLE STRIPS PER SHOP ORDER

CUSTOMER APPROVAL			
APPROVED BY:		CHASSIS DATA	TITLE
DATE:		MAKE	FOR
		PIERCE	PLANO FIRE RESCUE
		MODEL	PLANO, TEXAS
REV	DATE	BY	CH
		VELOCITY	DWG NO.

Pierce MANUFACTURING INC.

1500-D-600P, 575G WATER, 25G FOAM, 152" PUMPER BODY LADDERS IN RS BODY, (2)SPDLAYS, DELUGE, BOOSTER REEL

37444AD-SH1

JOB NO.	37444 01-02
SCALE	1:24
DATE	
DRAWN BY	JJB
CHECKED BY	KBO
SHEET SIZE	D
SHEET NO.	1 OF 2