



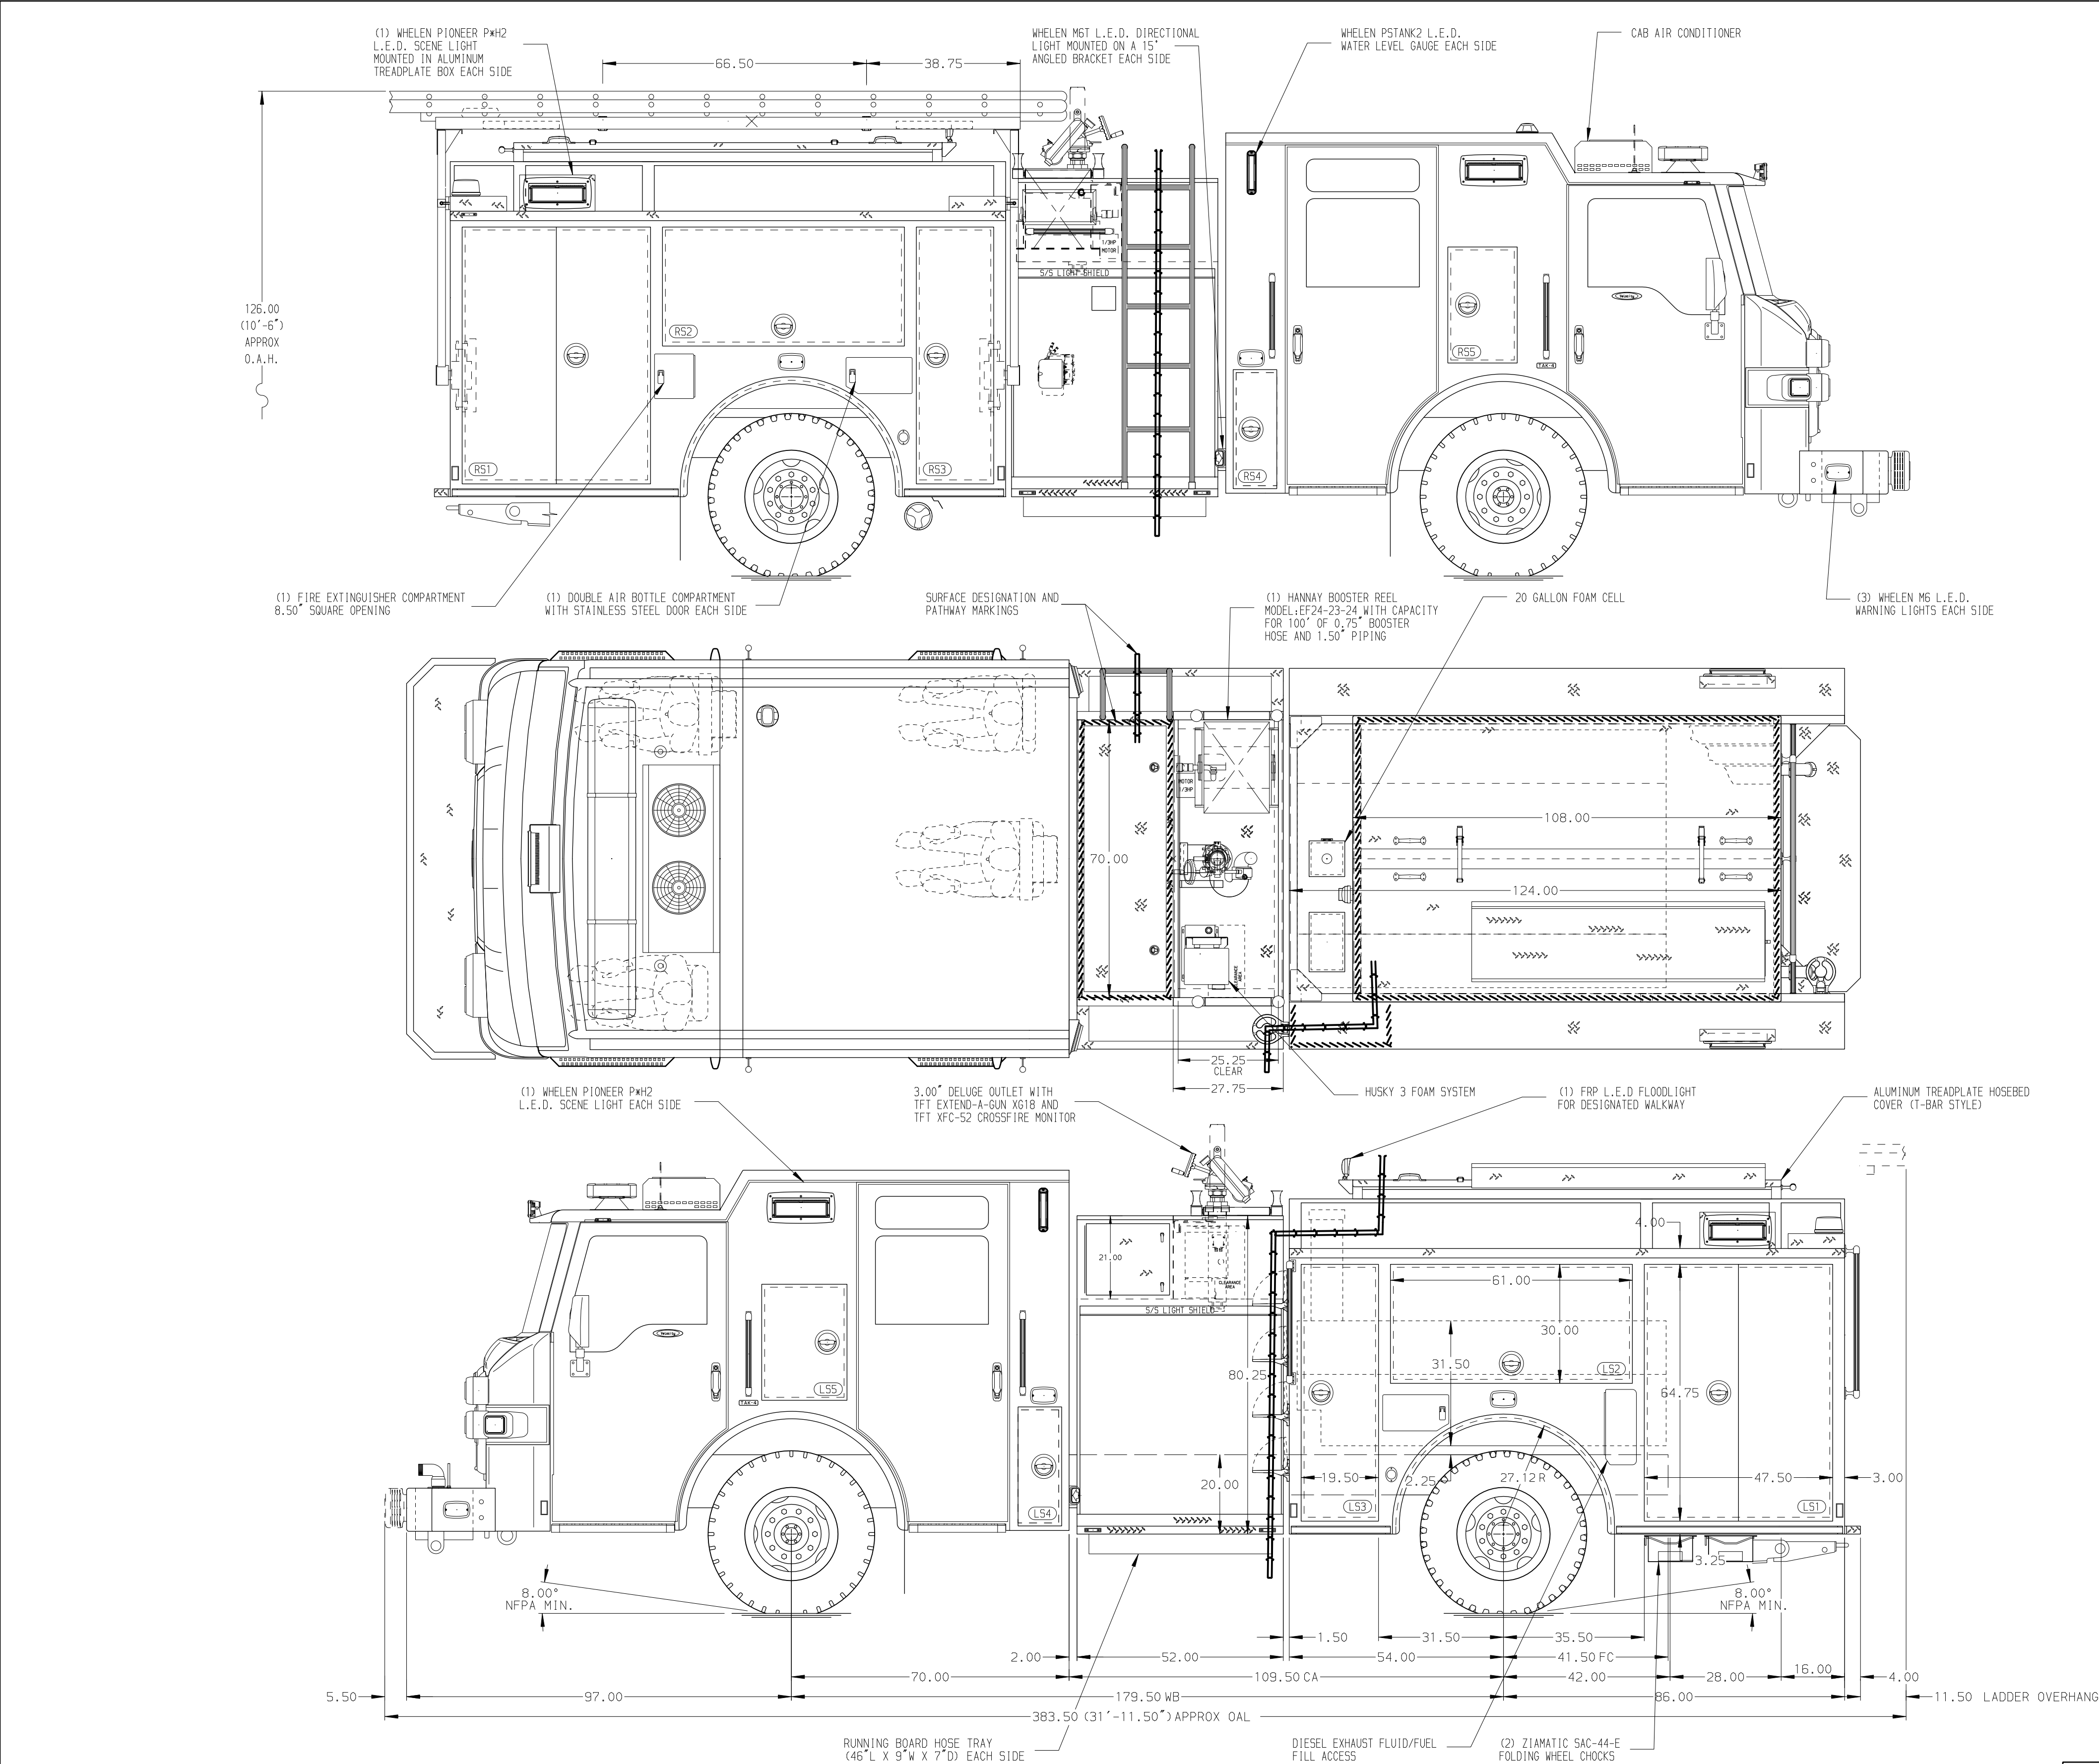

- HOSEBED CAPACITIES
- ① - 150' OF 1.75" D.J. POLY HOSE
 - ② - 150' OF 1.75" D.J. POLY HOSE
 - ③ - 1000' OF 5.00" D.J. POLY HOSE
 - ④ - 600' OF 3.00" D.J. POLY HOSE
 - ⑤ - 150' OF 1.75" D.J. POLY HOSE
 - ⑥ - 150' OF 1.75" D.J. POLY HOSE
 - ⑦ - 150' OF 1.75" D.J. POLY HOSE

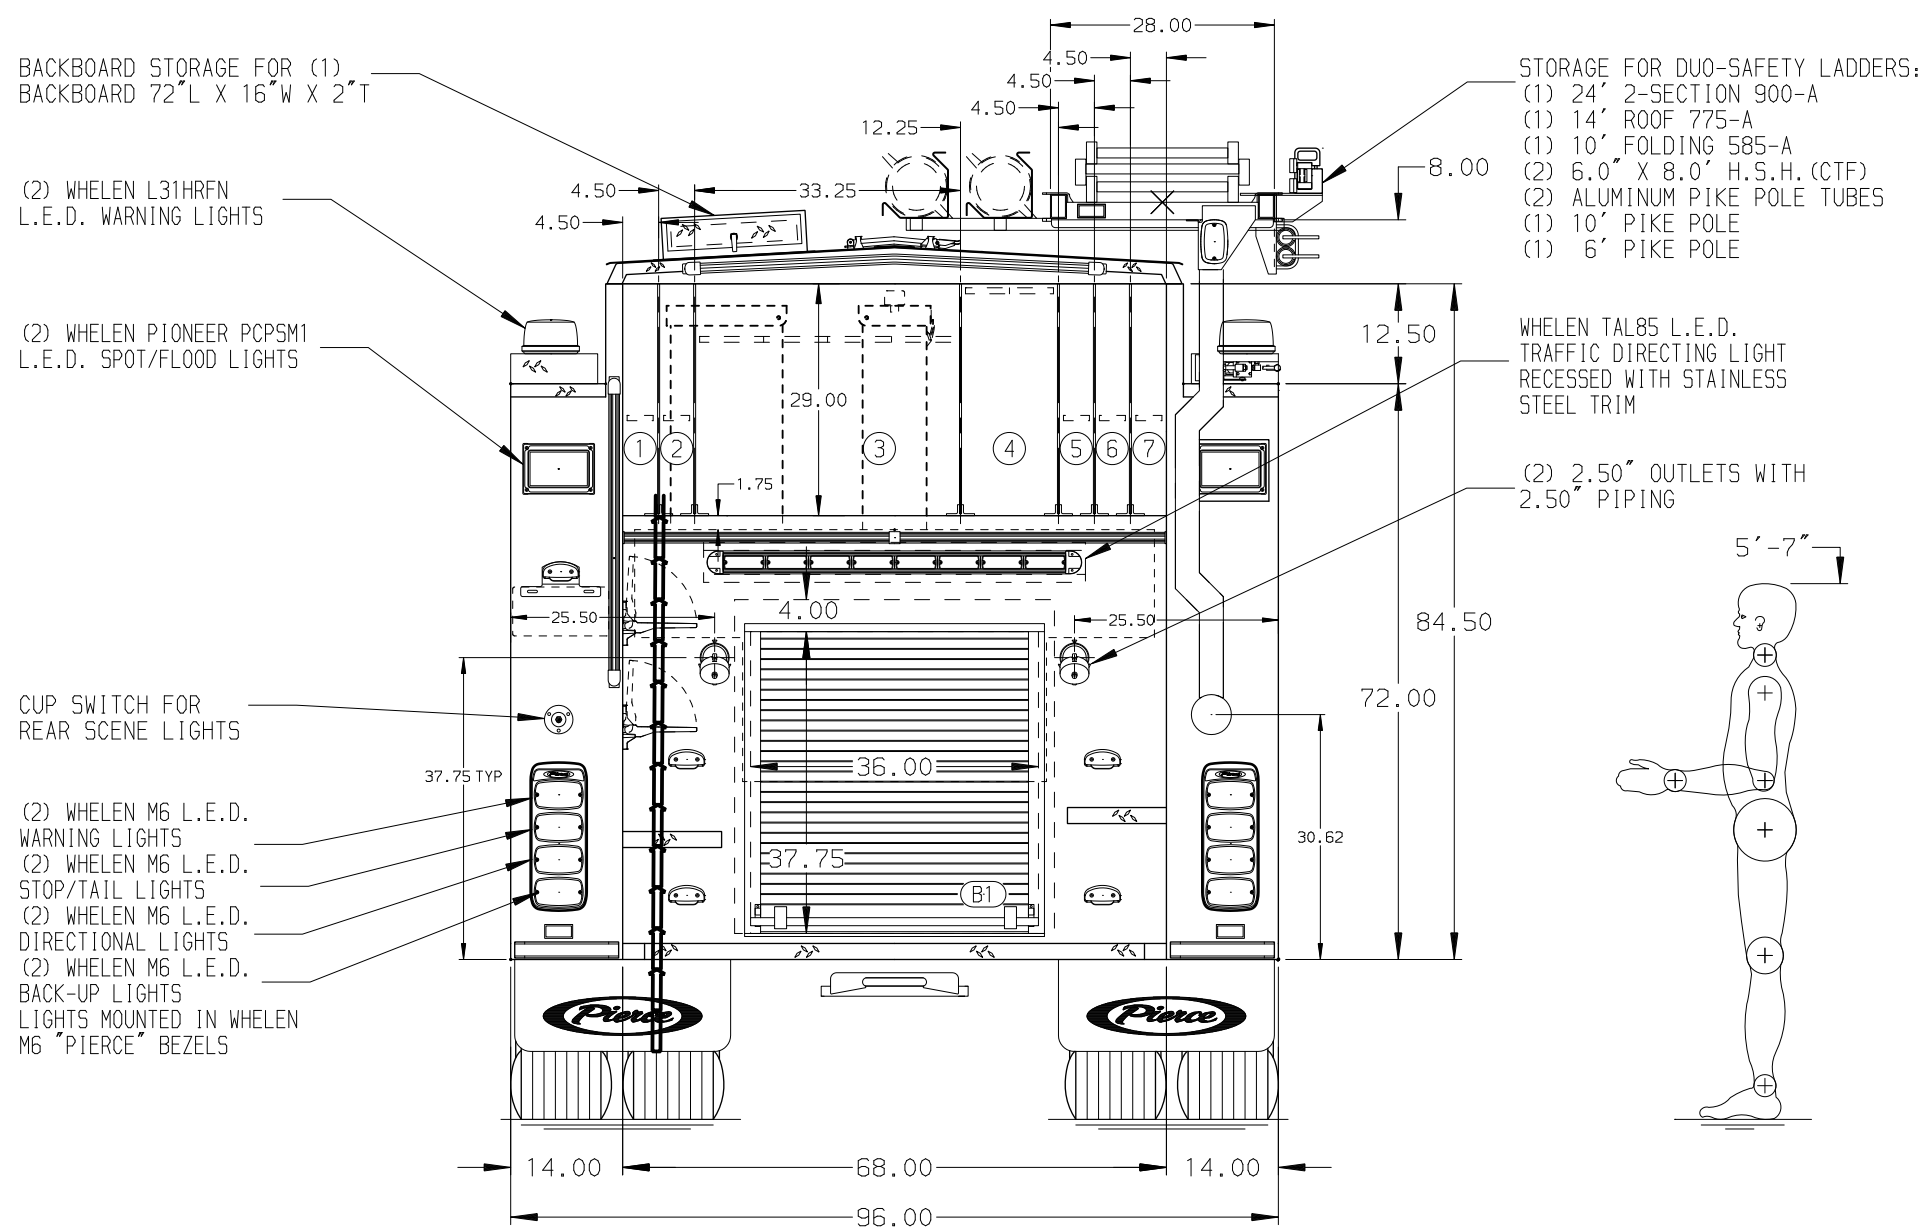

GALVANNEAL MAXIMUM O.A.L. 383.50" MAXIMUM O.A.H. 128.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. KUSSMAUL BATTERY CHARGER LOCATED PER SHOP ORDER
- 2. BATTERY CHARGE INDICATOR LOCATED PER SHOP ORDER
- 3. AIR INLET WITH DISCONNECT COUPLING LOCATED PER SHOP ORDER
- 4. AIR OUTLET WITH SHUT OFF VALVE LOCATED PER SHOP ORDER
- 5. 120V NEMA L5-30 SHORELINE RECEPTACLE LOCATED PER SHOP ORDER

CUSTOMER APPROVAL

APPROVED BY: _____
DATE: _____

				CHASSIS DATA
				MAKE
				PIERCE
				MODEL
REV	DATE	BY	CH	VELOCITY



TITLE 1500-D-520P, 500G WATER, 20G FOAM, 140" FH FRNT/REAR
FOR CITY OF MODESTO
MODESTO, CALIFORNIA
DWG NO. 37460AD-SH1

JOB NO.	37460
SCALE	1:24
DRAWN BY	JJB
CHECKED BY	BSE
SHEET SIZE	D
SHEET NO.	1 OF 1