PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM 19,500 lb TAK-4 Axle

AXLE, REAR 27,000 lb Dana Axle

ENGINE

455 HP Cummins X12 Engine

TRANSMISSION

Allison 5th Gen, 4000 EVS P

BUMPER

13" Extended Painted Steel

CAB

6010 Enforcer Cab

BODY

WATER TANK 750 Gallon Poly Water Tank

COMPT, PUMPER, REAR

37.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE

136" Rollup Full Height Front & Rear

COMPT, PUMPER, RIGHT SIDE 136" Rollup 3/4 Height Front & Rear

FIRE SUPPRESSION

PUMPHOUSE

48" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50" 1.50" Crosslays Not Required

CROSSLAYS, 2.50"

SPEEDLAYS

2.50" Crosslay Not Required


(2) 1.50″ W/Tray Std. Capacity (1) 2.50″ W/Tray Std. Capacity GENERATOR

Generator Not Required

Foam System Husky 3 Single Agent Foam System

Foam Cell 20 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

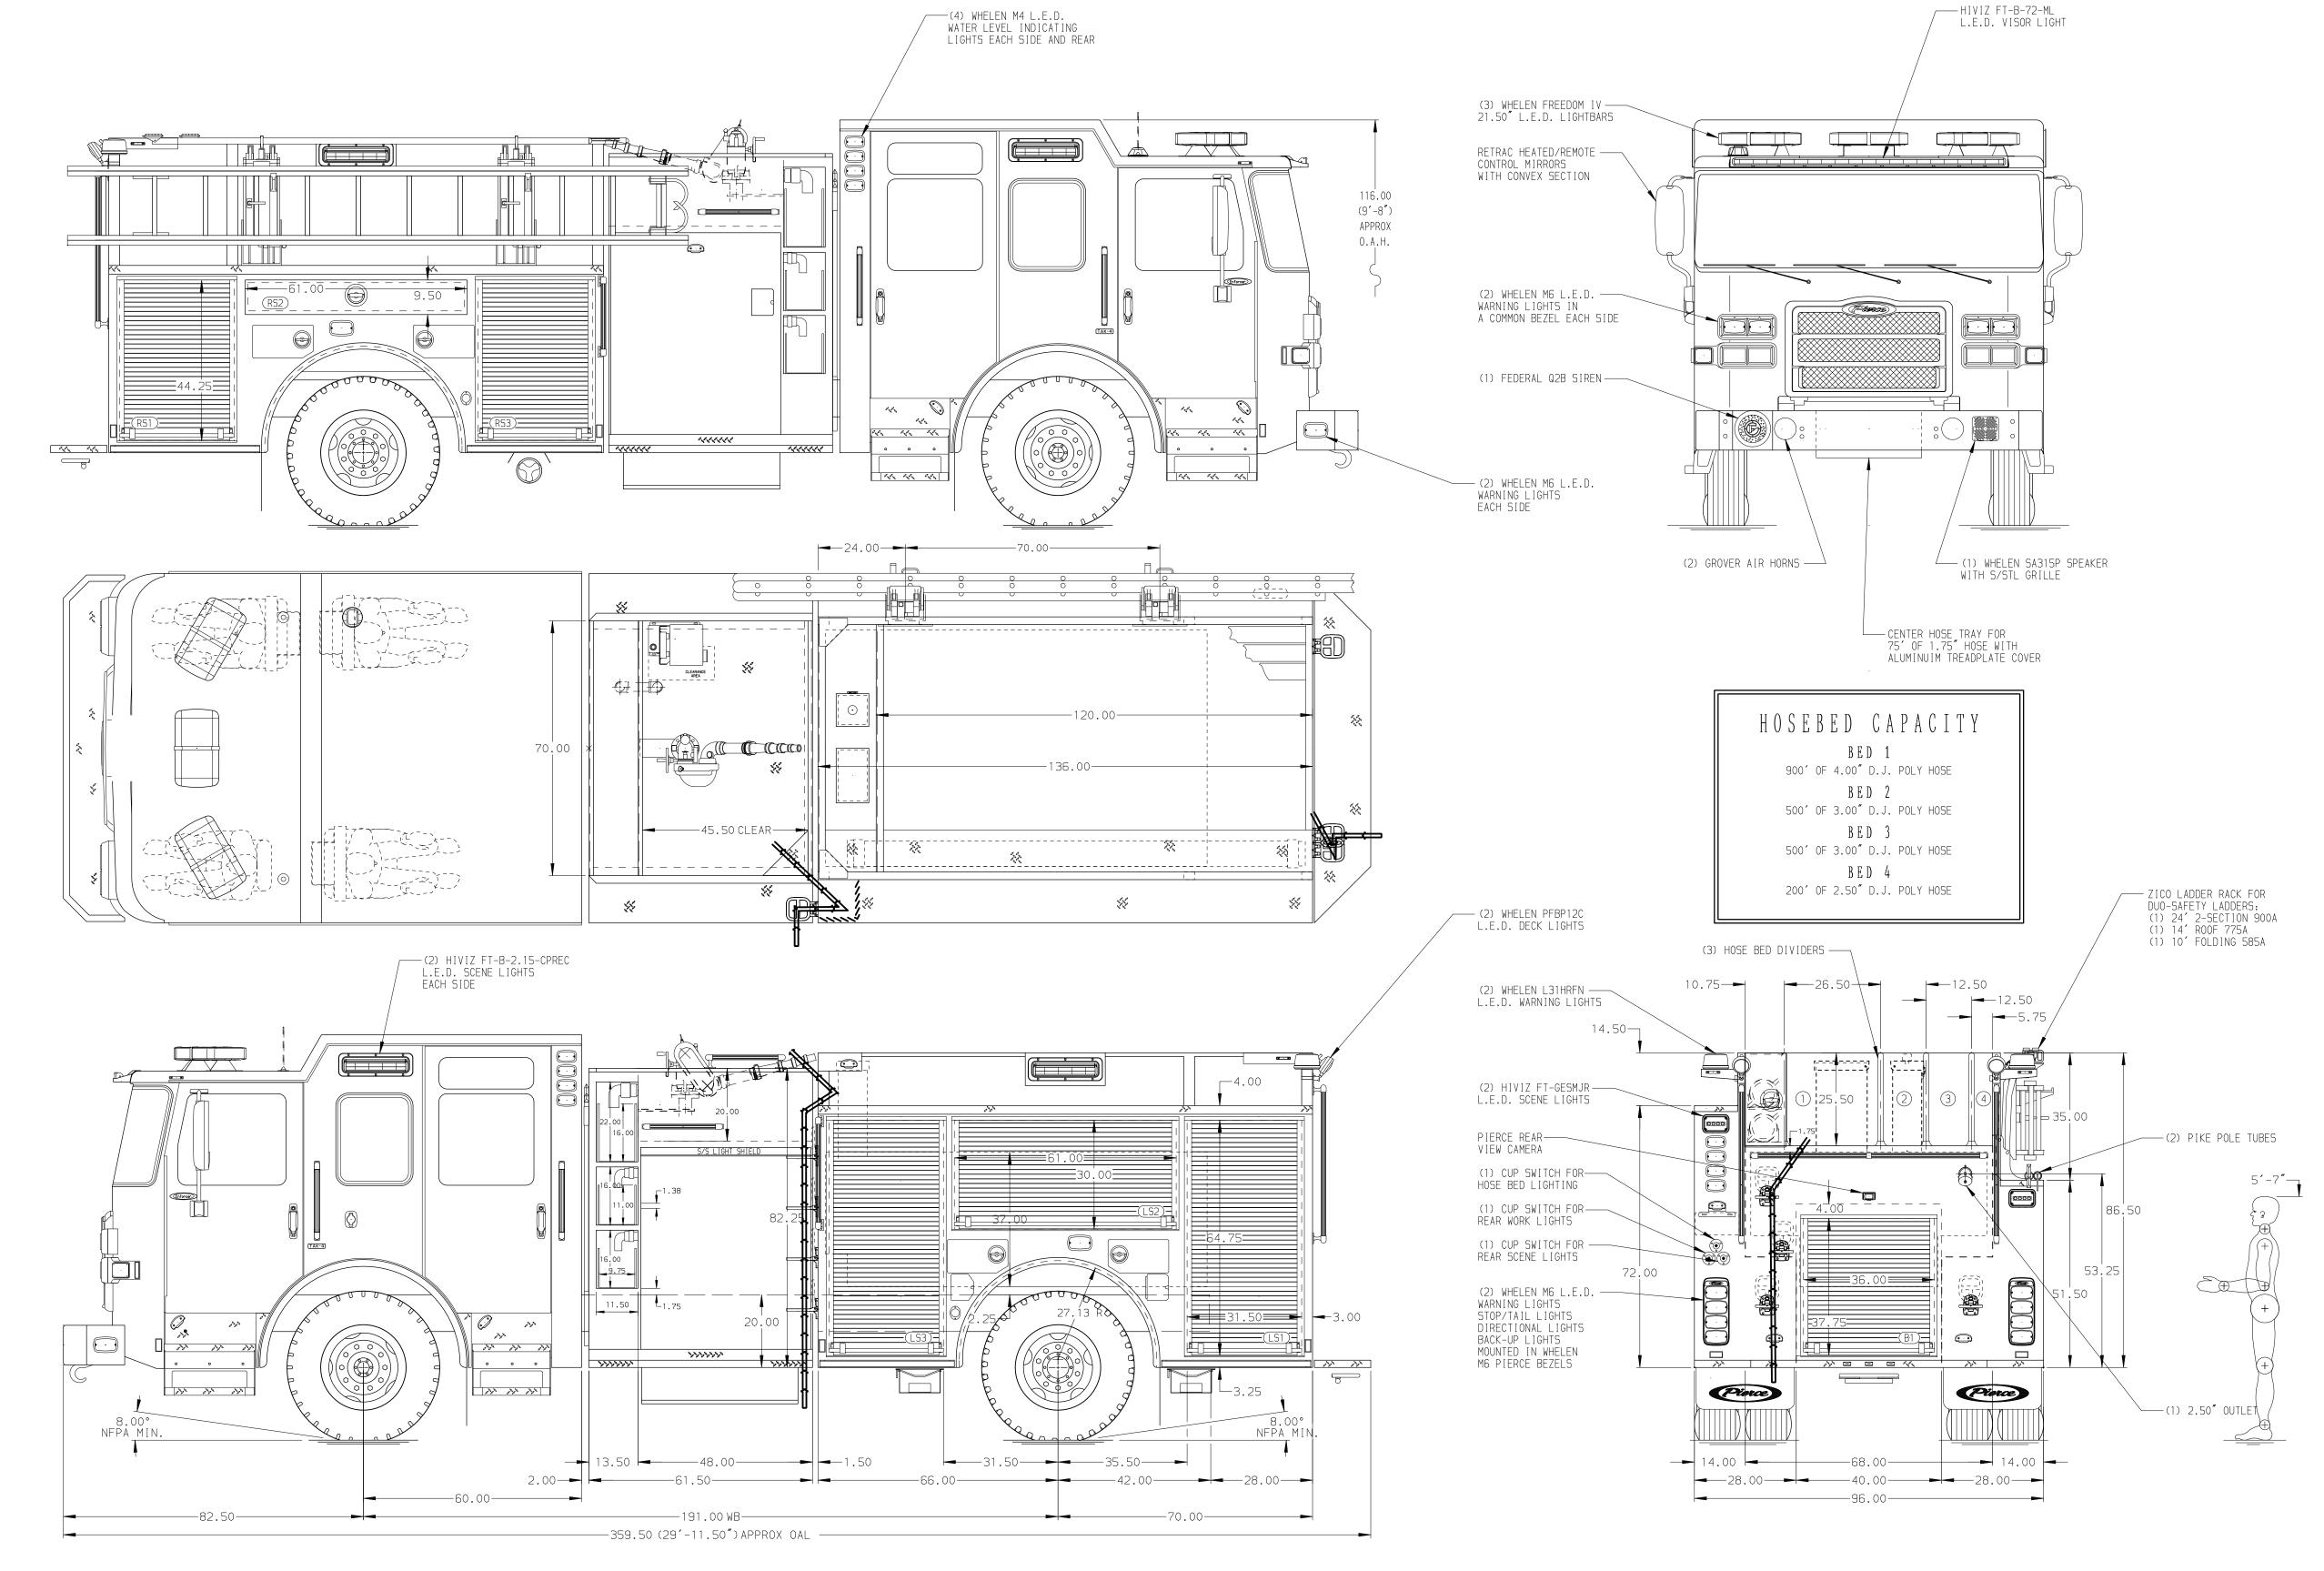

(MAXIMUM O.A.H. 119.00")

B. ONE ADJUSTABLE SLIDE-OUT TRAY LOCATED PER SHOP ORDER

9. THREE 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER 5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
5. ONE ADJUSTABLE SHELF LOCATED PER SHOP ORDER
7. ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER SHOP ORDER

CUSTOMER APPROVAL JOB NO. 37465 MANUFACTURING INC. SCALE APPROVED BY: DATE 1:24 DATE: DRAWN BY CHASSIS DATA Pierce Pumper Approval Drawing 10N0V21 MMF MAKE CHECKED BY West LaFayette Fire Department 29N0V21 COL PIERCE MODEL SHEET SIZE SHEET NO. 37465AD REV DATE BY CH

View File Created 29-NOV-2021 09:01:53