


HOSEBED CAPACITIES

1	300' OF 2.50" D.J. HOSE
2	600' OF 2.50" D.J. HOSE
3	300' OF 2.50" D.J. HOSE
4	1200' OF 5.00" L.D.H. HOSE
5	350' OF 1.75" D.J. HOSE
6	350' OF 1.75" D.J. HOSE

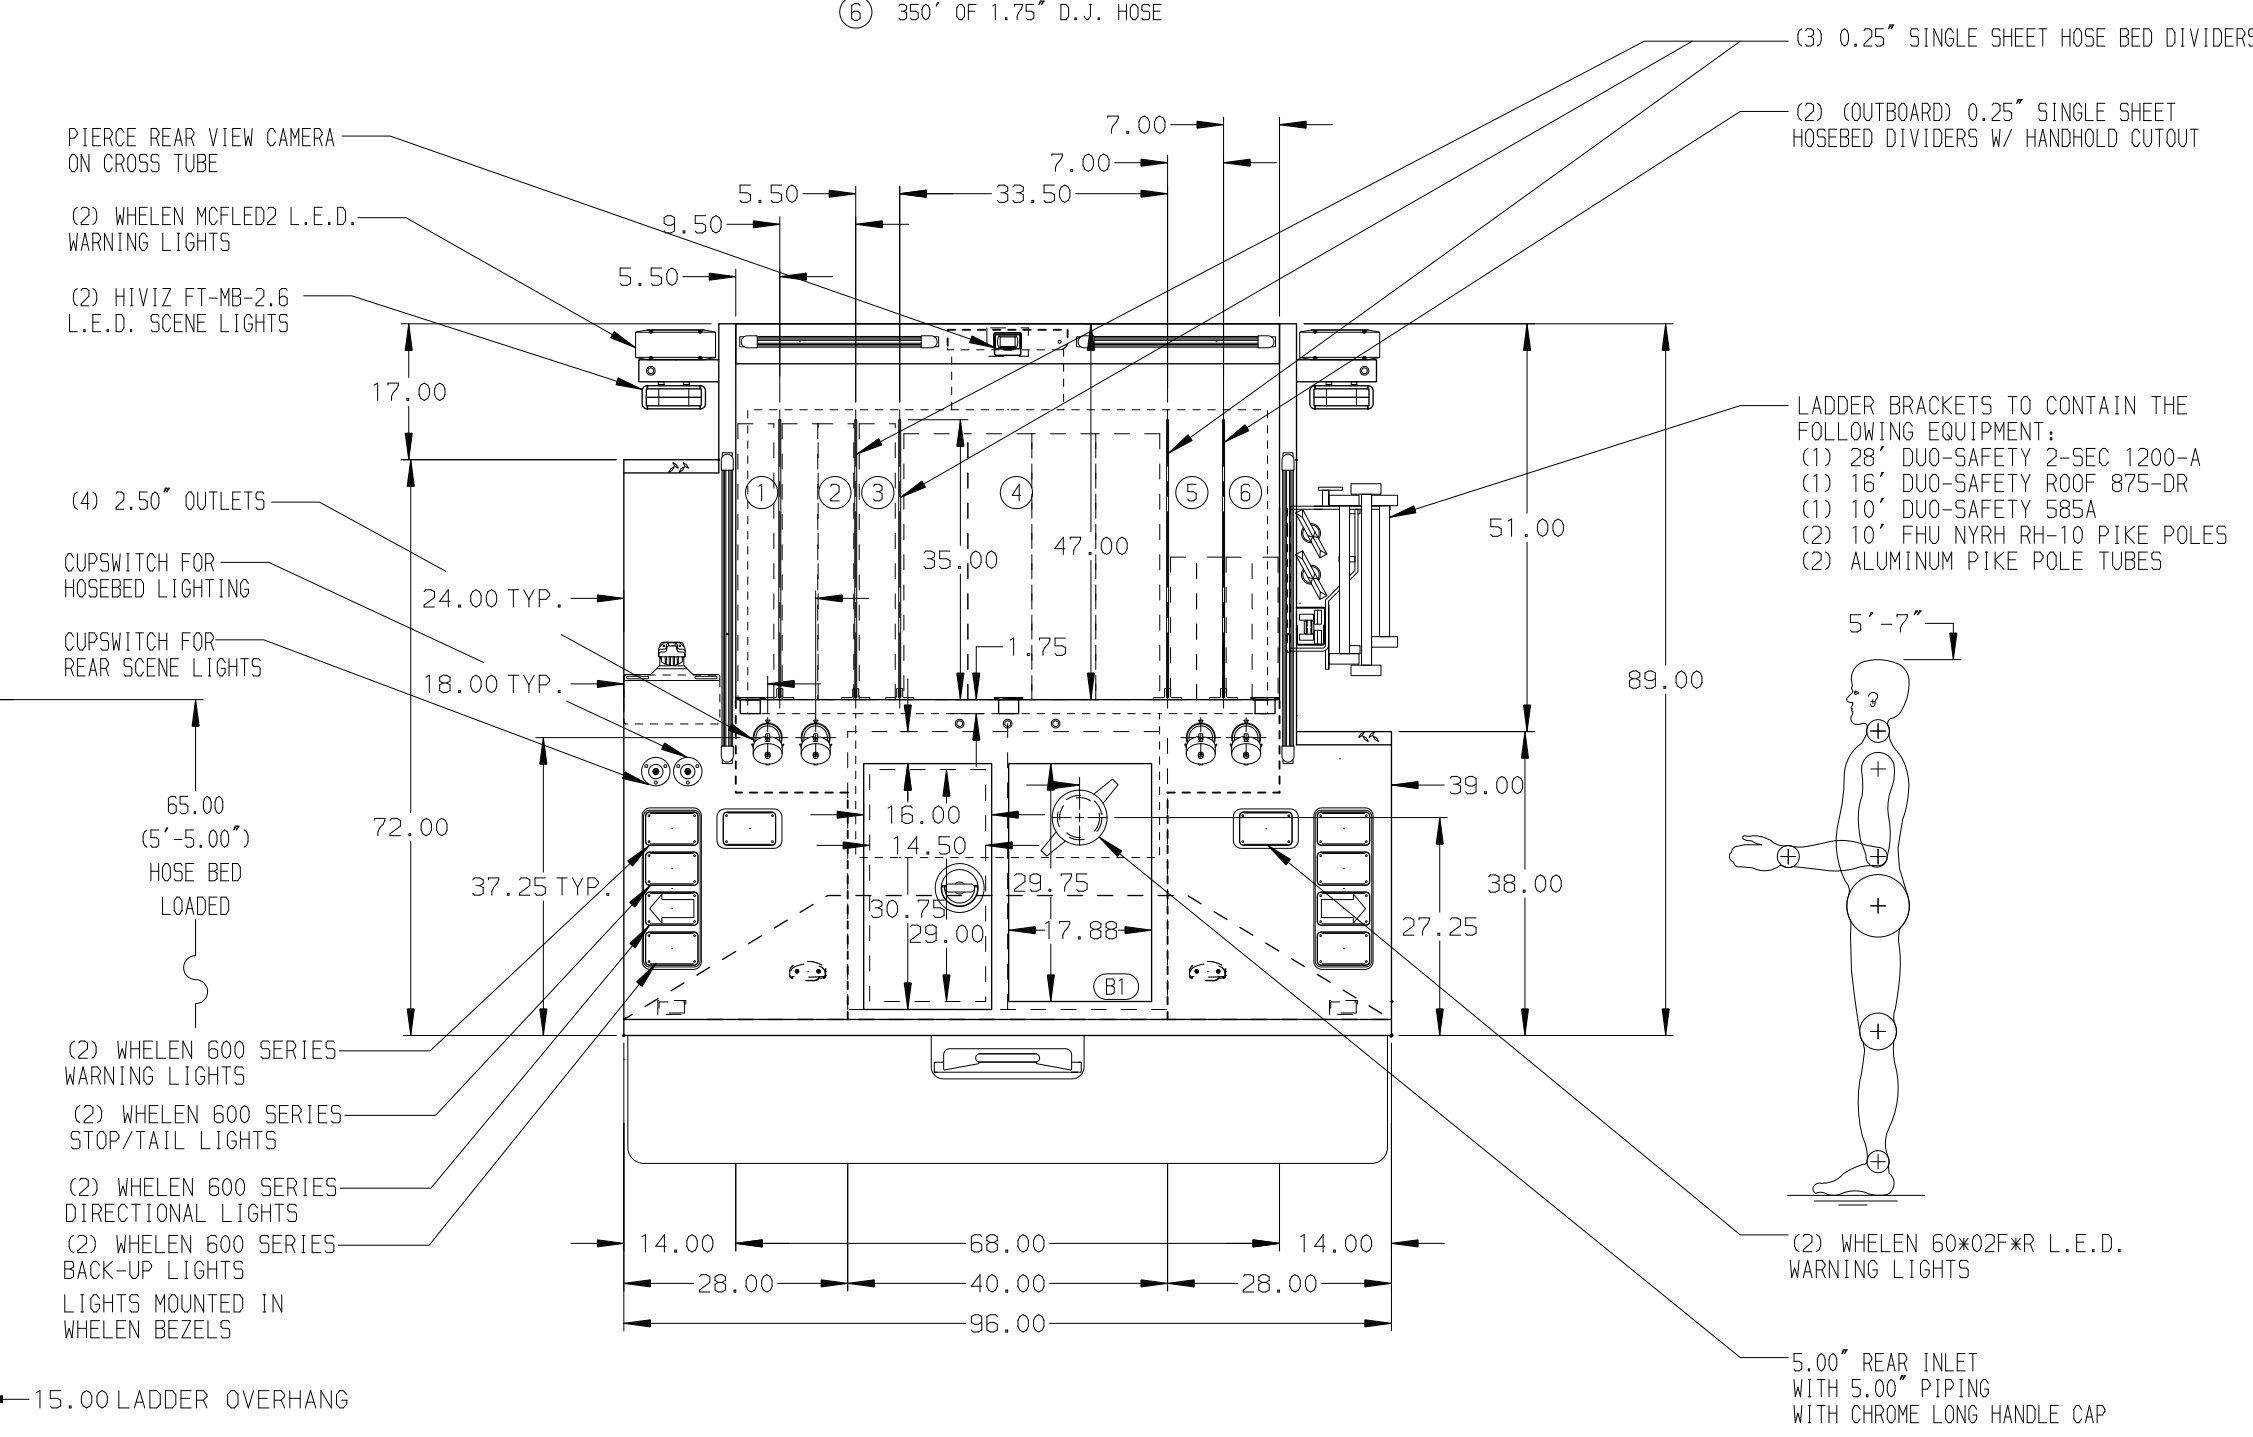

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.  
MINOR DETAILS NOT SHOWN.

- ONSPOT TIRE CHAINS TO BE PROVIDED AT THE REAR
- WHEEL CHOCKS AND BRACKETS (CF3)
- AIR INLET/OUTLET W/ DISCONNECT FITTING ON THE DRIVER'S SIDE PUMP PANEL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S STEP AREA
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- L.E.D. LIGHT STRIP LOCATED ON THE FRONT OF THE HOSEBED
- REVERSED HINGED DOOR ON LS3
- ONE LOW/SPECIAL SIDE HEIGHT SHELF LOCATED PER SHOP ORDER
- FOUR FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
- TWO FLOOR MOUNTED SLIDE-OUT TRAYS WITH SPECIAL SIDE HEIGHTS LOCATED PER SHOP ORDER

CUSTOMER APPROVAL

APPROVED BY:	
DATE:	
CHASSIS DATA	TITLE
MAKE	FOR
PIERCE	DWG NO.
MODEL	
ENFORCER	



1500-D-750P, 750 GAL WATER TANK, 145" PUMPER BODY  
SIDE CONTROL, (2) CROSSLAYS, DELUGE, BOOSTER REEL  
STEELE CREEK FIRE DEPARTMENT  
CHARLOTTE, NORTH CAROLINA

37488AD

JOB NO.	37488
SCALE	DATE
1:24	
DRAWN BY	DATE
LST	16JUN22
CHECKED BY	DATE
CDU	20JUN22
SHEET SIZE	SHEET NO.
D	1 OF 1