
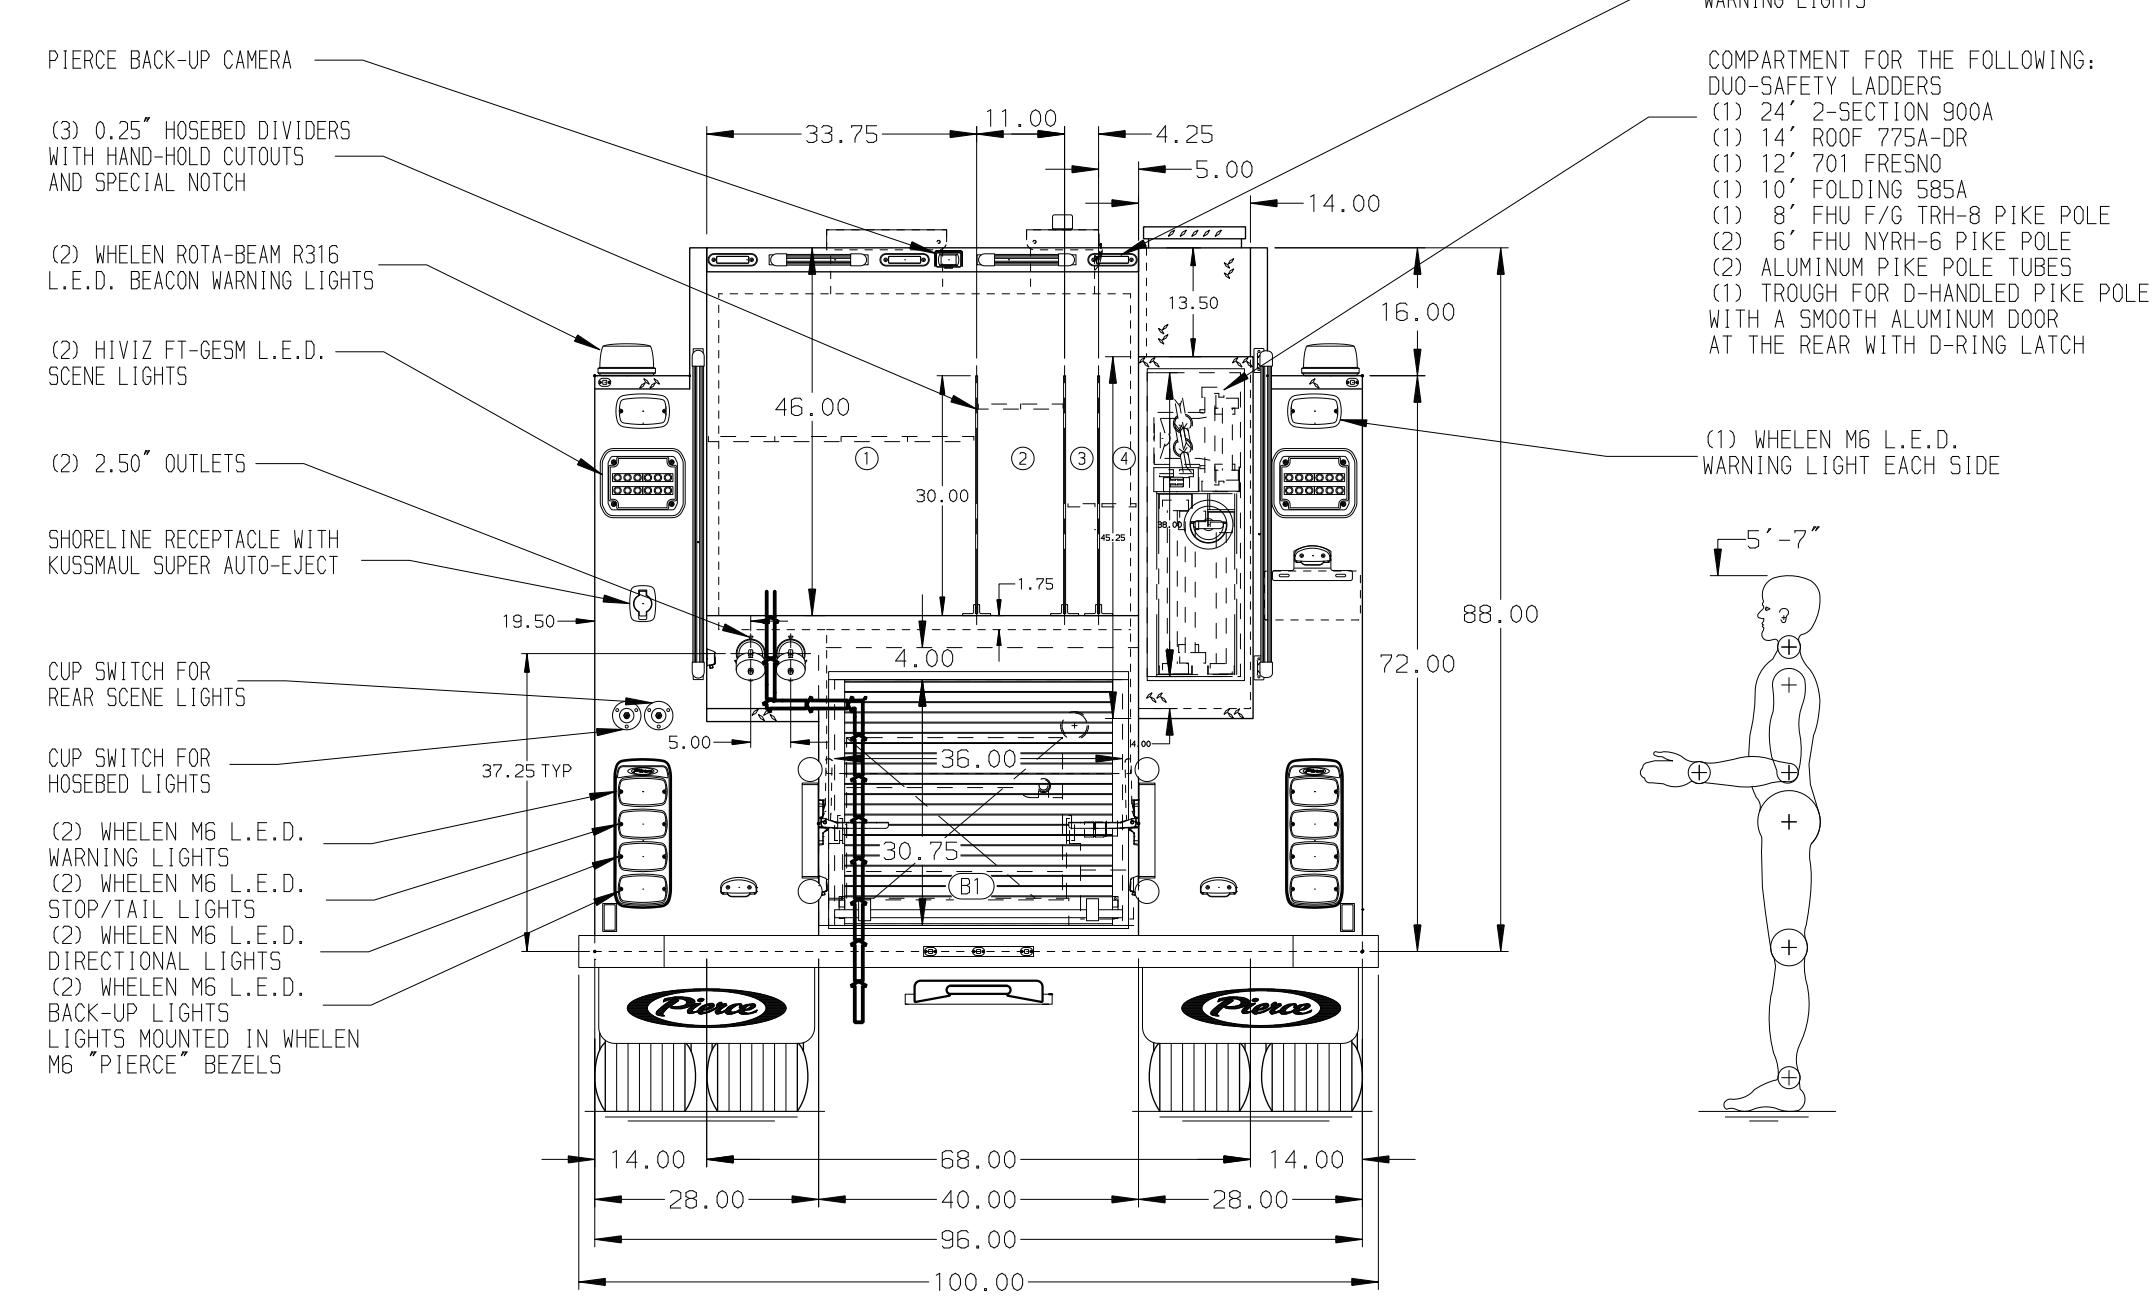


- HOSEBED CAPACITIES**
- ① - 1000' OF 5.00" B1G-10 KEY HOSE
  - ② - 600' OF 3.00" B1G-10 KEY HOSE
  - ③ - 250' OF 1.75" B1G-10 KEY HOSE
  - ④ - 250' OF 2.50" B1G-10 KEY HOSE

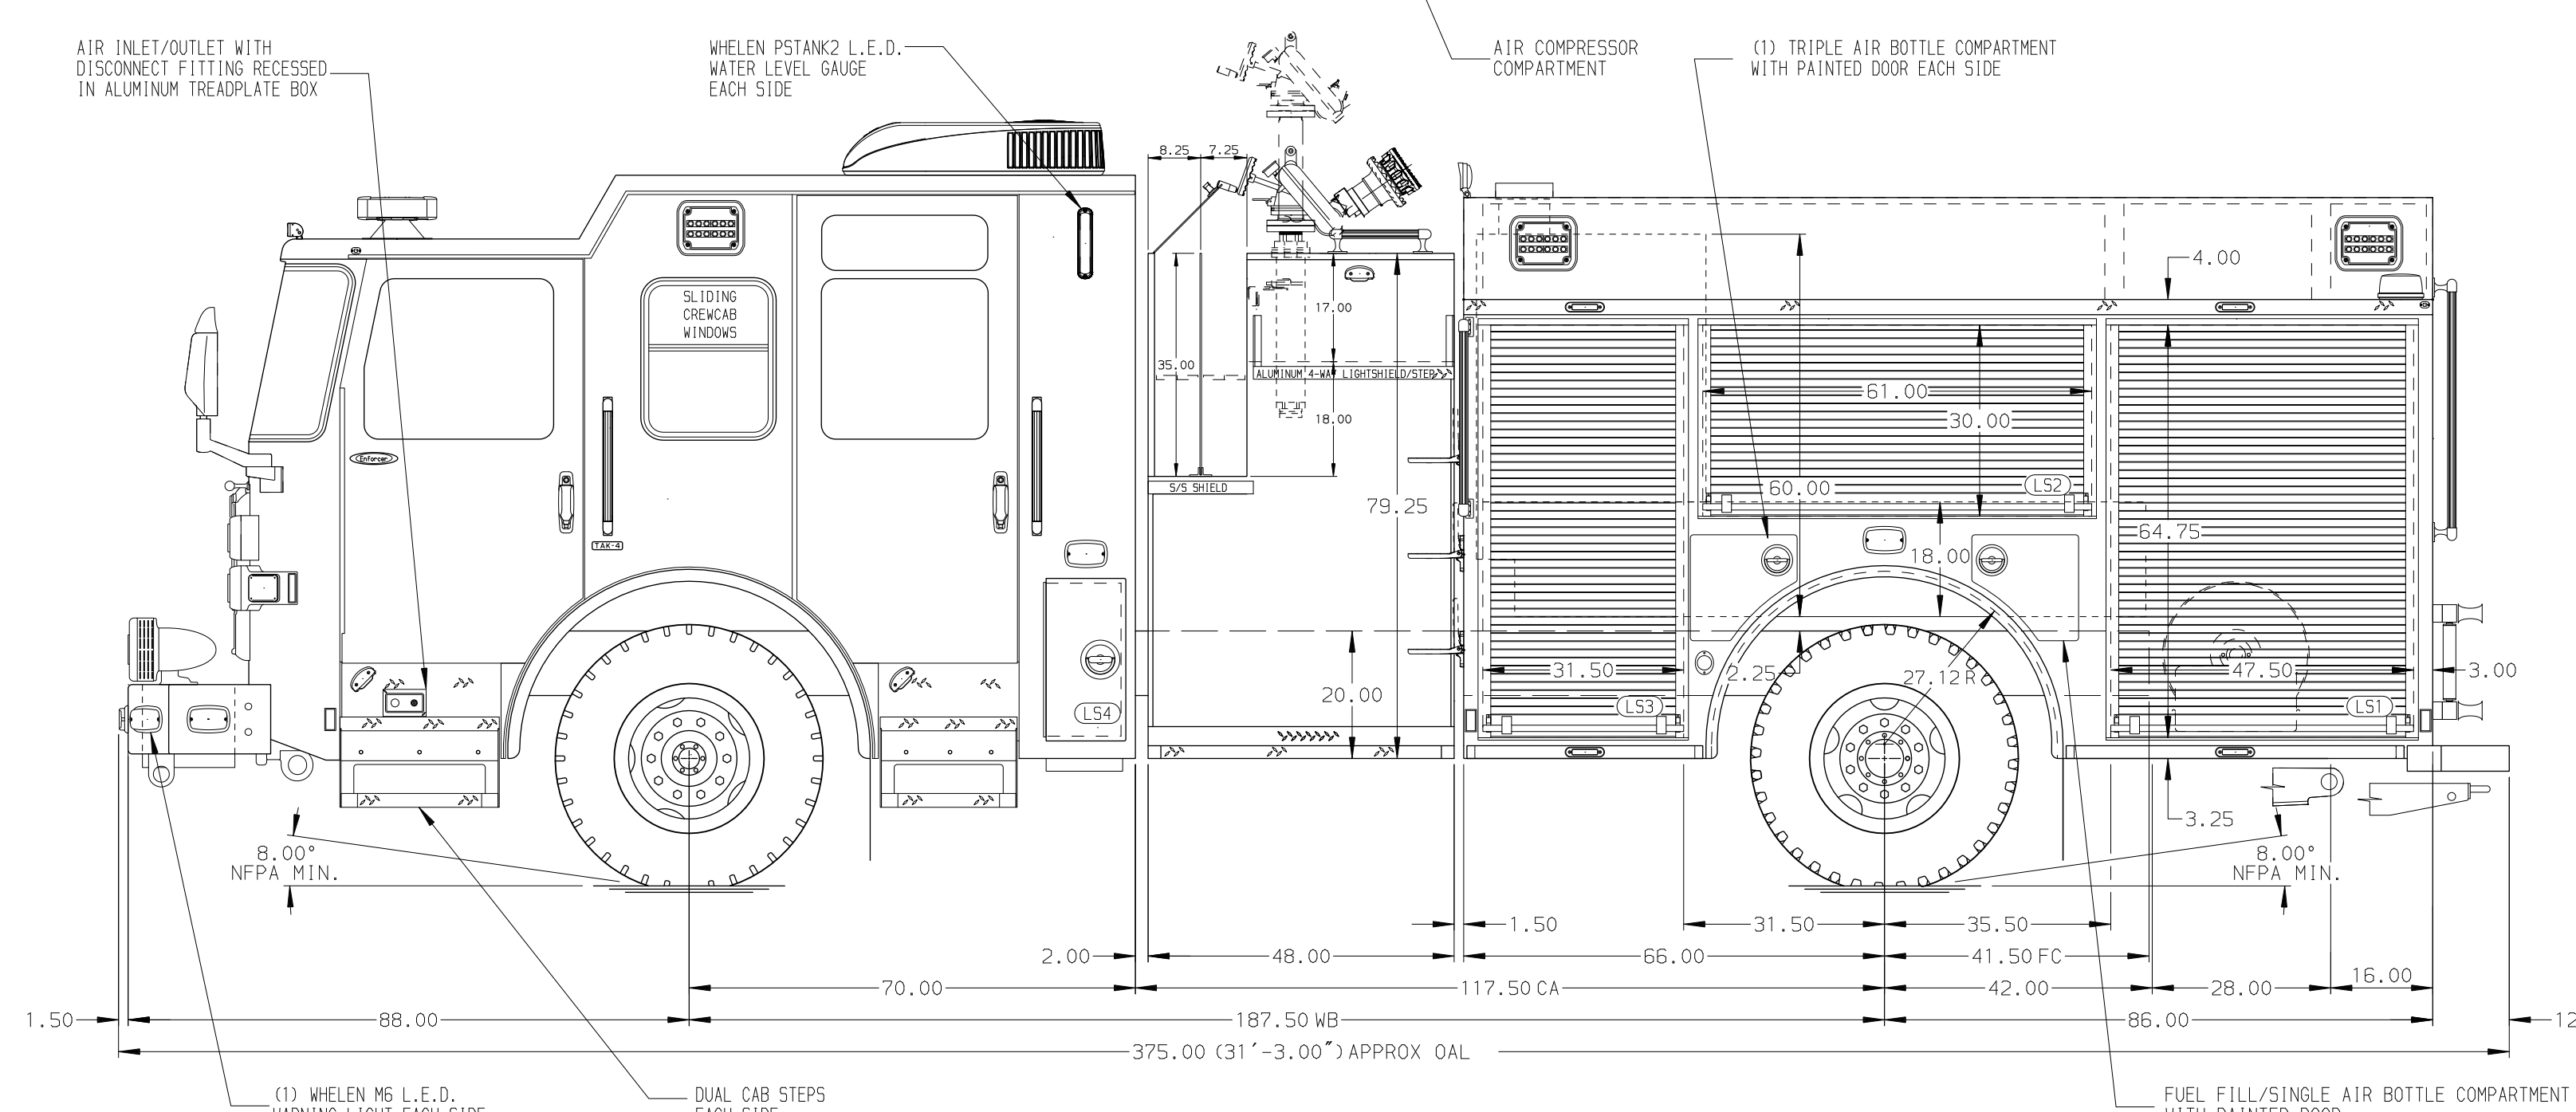

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

**NOTE**  
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. BATTERY CHARGE INDICATOR LOCATED BEHIND DRIVER'S SEAT
- 2. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 3. HUGKY 3 FOAM SYSTEM

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
CHASSIS DATA	TITLE	1500-D-530P, 500G WATER, 30G FOAM, 152" FDLER PUMPER LADDERS BTWN TANK & SS, (2)XLAYS, DELUGE, SIDE CNTRL	
MAKE	FOR	DALLAS FIRE DEPARTMENT	
PIERCE		DALLAS, TX	
MODEL	DWG NO.	37506AD-SH1	
ENFORCER			

Pierce MANUFACTURING INC.		JOB NO.	37506 01-08
SCALE	1:24	DATE	
DRAWN BY	JJB		29JUN21
CHECKED BY	KBO		01JUL22
SHEET SIZE	D	SHEET NO.	1 OF 2