
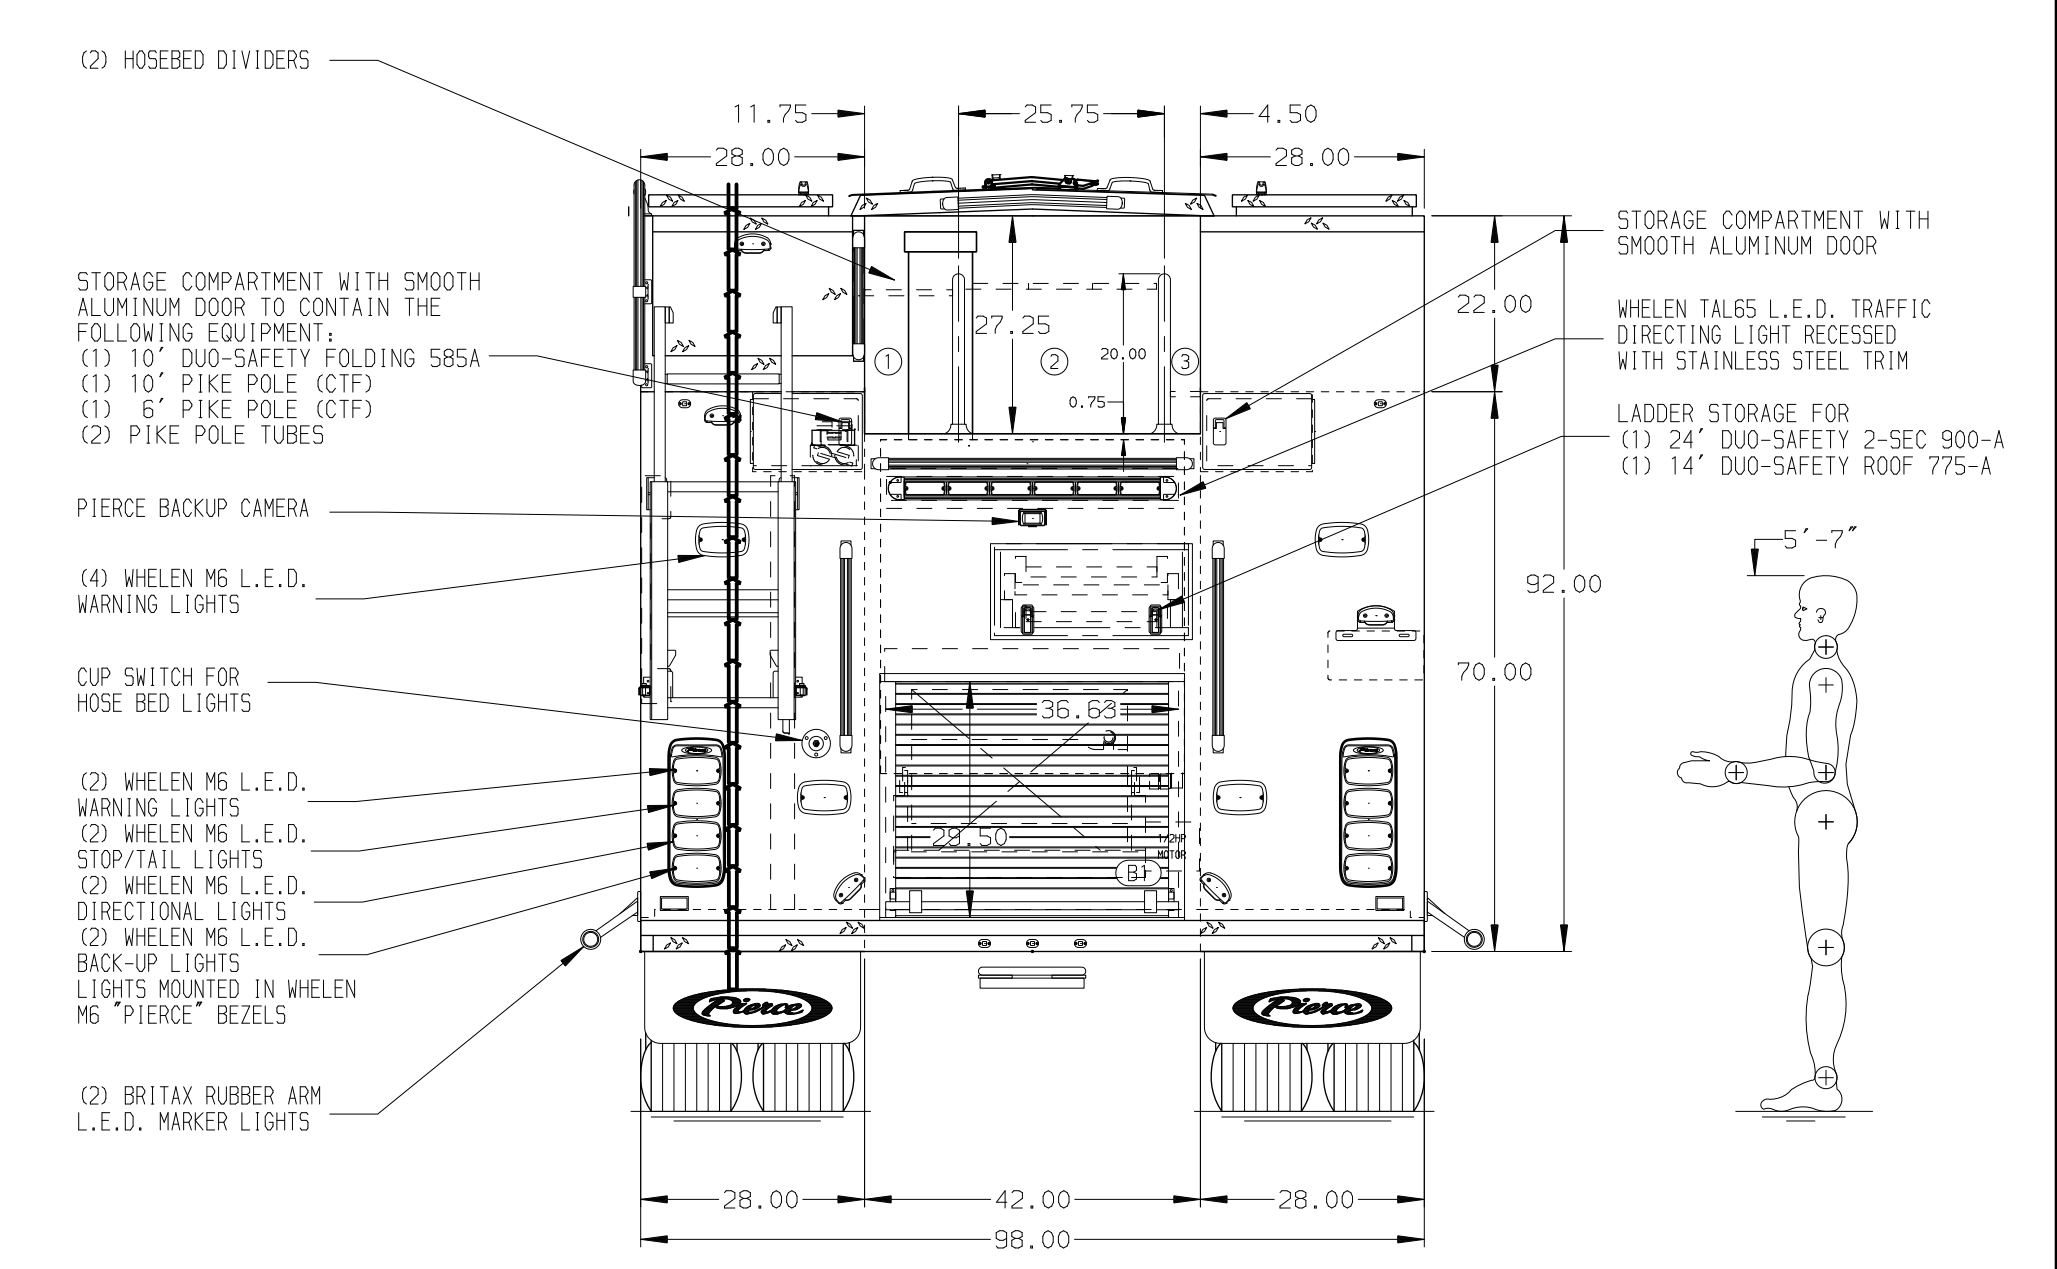


- HOSEBED CAPACITIES
- ① - 600' OF 3.00" D.J. POLY HOSE
 - ② - 1000' OF 5.00" D.J. POLY HOSE
 - ③ - 200' OF 2.00" D.J. POLY HOSE

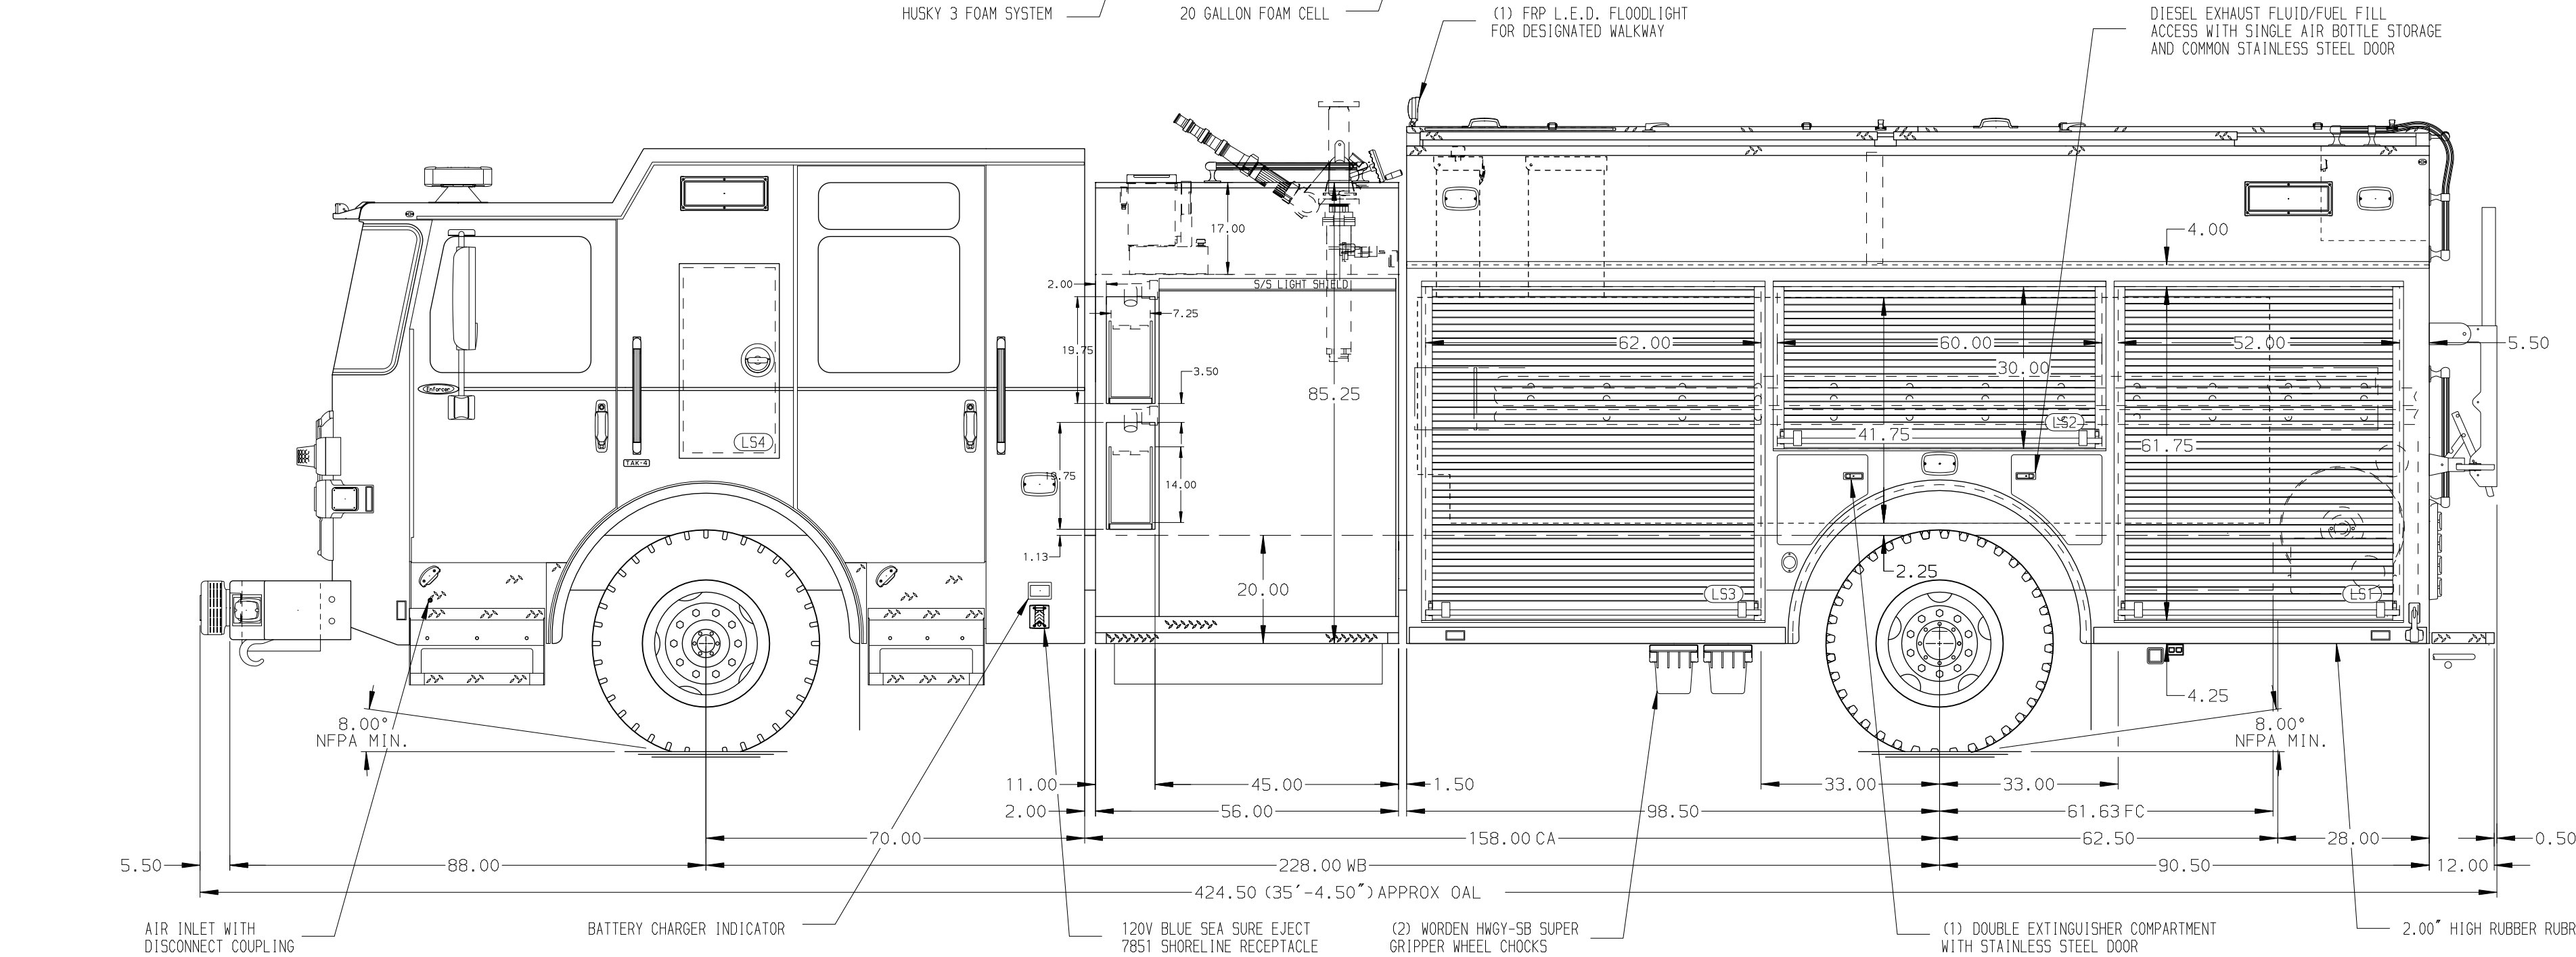

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN DRIVER SIDE HATCH COMPARTMENT
2. DUAL L.E.D. LIGHT STRIPS LOCATED BELOW HOSE BED COVER
3. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED PER SHOP ORDER
4. HANNAY BOOSTER REEL MODEL: HANNAY EF34-23-24 WITH CAPACITY FOR 200' OF 1.00" LOCATED IN COMPARTMENT B1

CUSTOMER APPROVAL			
APPROVED BY:		CHASSIS DATA	TITLE
DATE:		MAKE	FOR
		PIERCE	MODEL
			DWG NO.
REV	DATE	BY	CH
			ENFORCER

		JOB NO.	37527
		SCALE	DATE
1500-D-750P, 730G WATER, 20G FOAM, 189" HDRP BODY LADDERS THRU TANK, (2) SPDLAYS, DELUGE, BOOSTER REEL		DRAWN BY	JJB
MARBLE FALLS FIRE DEPARTMENT MARBLE FALLS, TEXAS		CHECKED BY	PHA
37527AD-SH1		SHEET SIZE	SHEET NO.
		D	1 OF 2