


- HOSEBED CAPACITIES**
- ① 600' OF 3.00" D.J. POLY HOSE W/ 200' OF 2.50" D.J. POLY HOSE ON TOP W/ 200' OF 1.75" D.J. POLY HOSE ON TOP
 - ② 1600' OF 5.00" D.J. POLY HOSE
 - ③ 600' OF 3.00" D.J. POLY HOSE W/ 200' OF 2.50" D.J. POLY HOSE ON TOP W/ 200' OF 1.75" D.J. POLY HOSE ON TOP

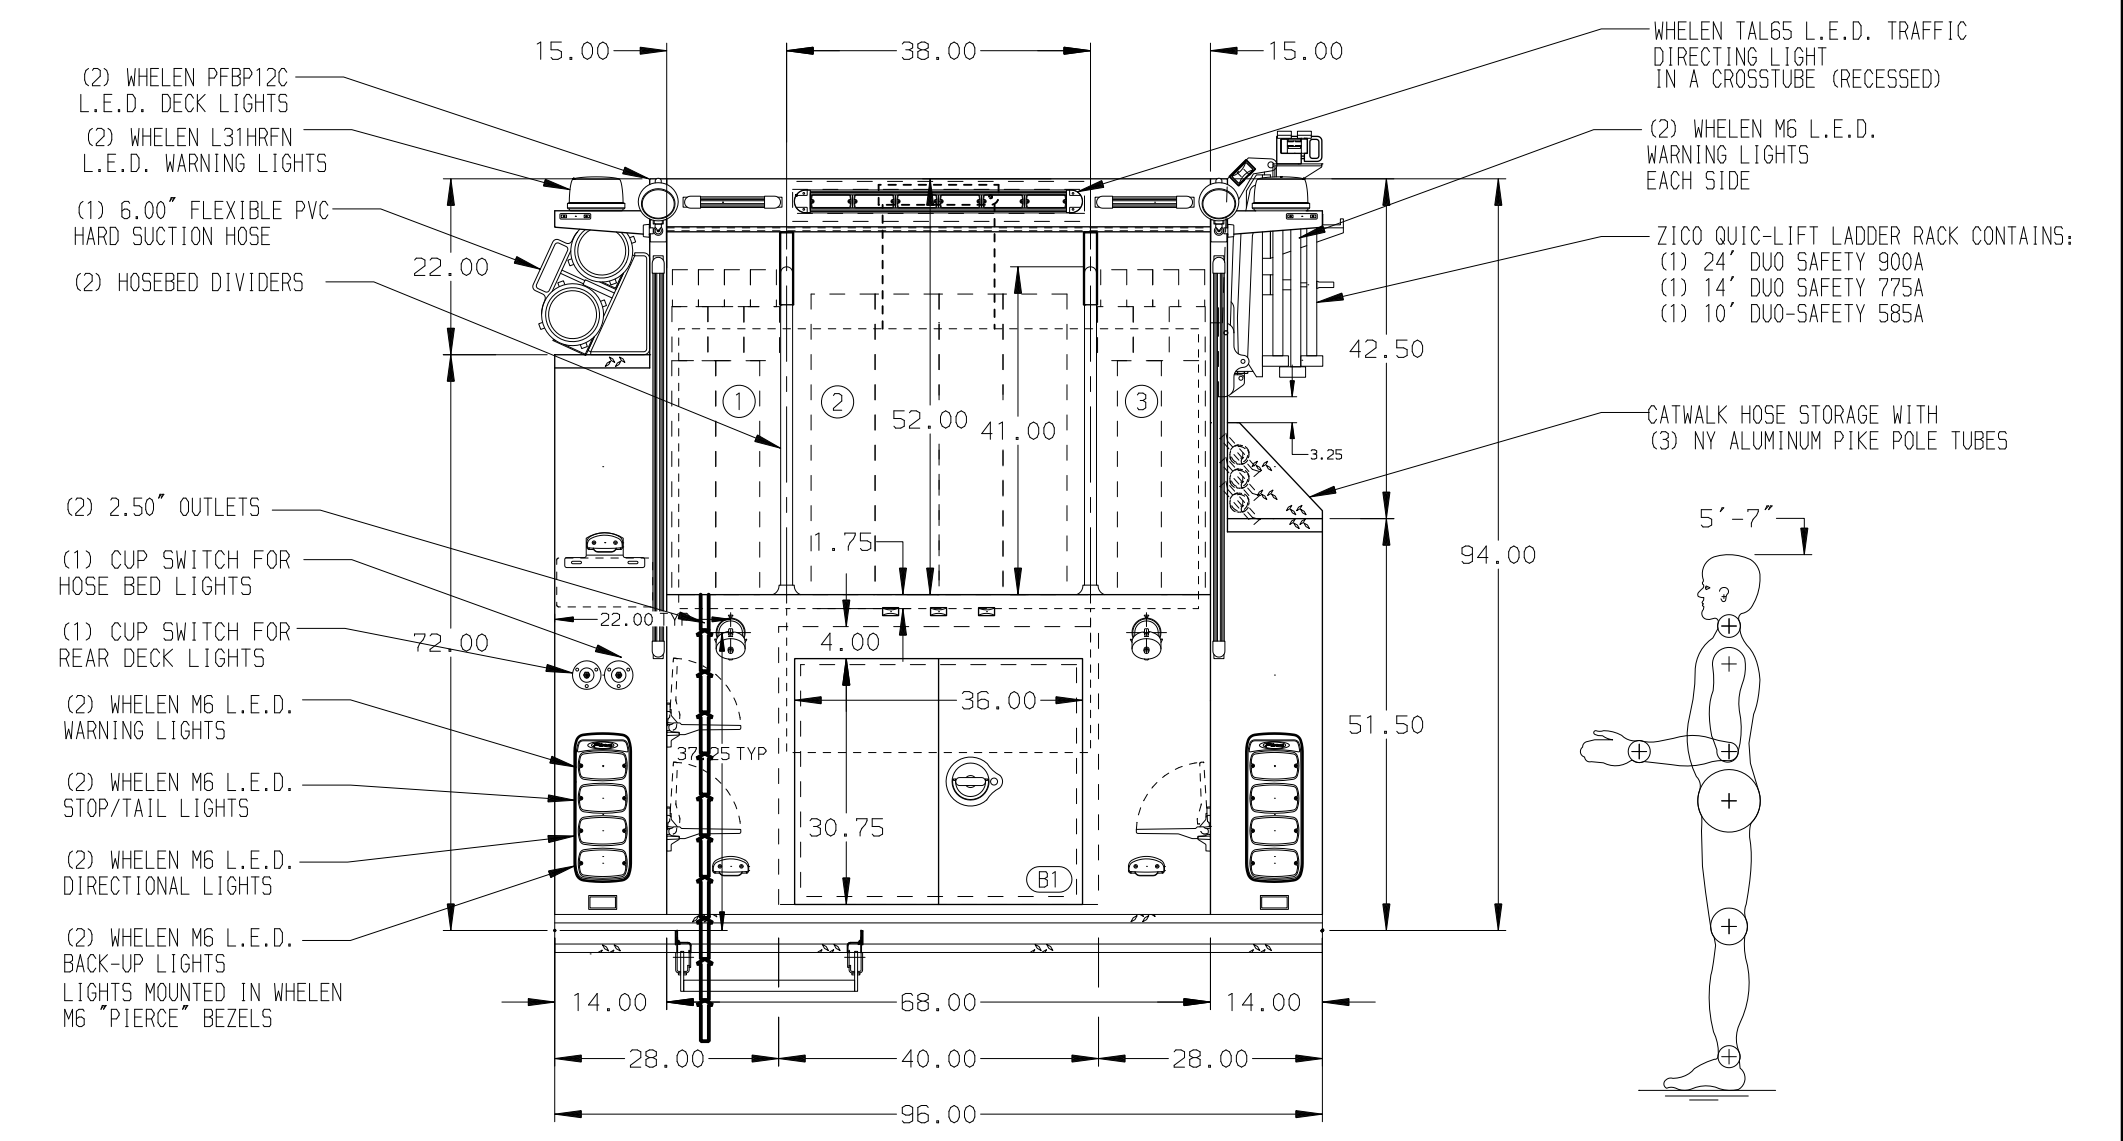

STAINLESS STEEL BODY MAXIMUM O.A.W. 96.00" MAXIMUM O.A.H. 122.00" SIDE ROLL PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. BATTERY CHARGER LOCATED PER ORDER
- 2. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
- 3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 4. AIR INLET WITH DISCONNECT COUPLING LOCATED IN DS STEP WELL

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
REV	DATE	BY	CH

Pierce MANUFACTURING INC.

TITLE: 1500-D-500 GAL POLY, 152" FULL HEIGHT LEFT SIDE, 3/4 BROOM RIGHT SIDE, ZICO LADDER RACK, DELUGE

FOR: PORT JEFFERSON FIRE DISTRICT, PORT JEFFERSON, NEW YORK

DWG NO.: 37656AD

JOB NO.	37656
SCALE	1:24
DATE	
DRAWN BY	LME
CHECKED BY	PHA
SHEET SIZE	D
SHEET NO.	1 OF 1