


- HOSEBED CAPACITIES**
- ① - 300' OF 1.75" D.J. POLY HOSE
 - ② - 150' OF 1.75" D.J. POLY HOSE
 - ③ - 200' OF 2.50" D.J. POLY HOSE
 - ④ - 1200' OF 5.00" SYNTHETIC HOSE
 - ⑤ - 400' OF 2.50" D.J. POLY HOSE

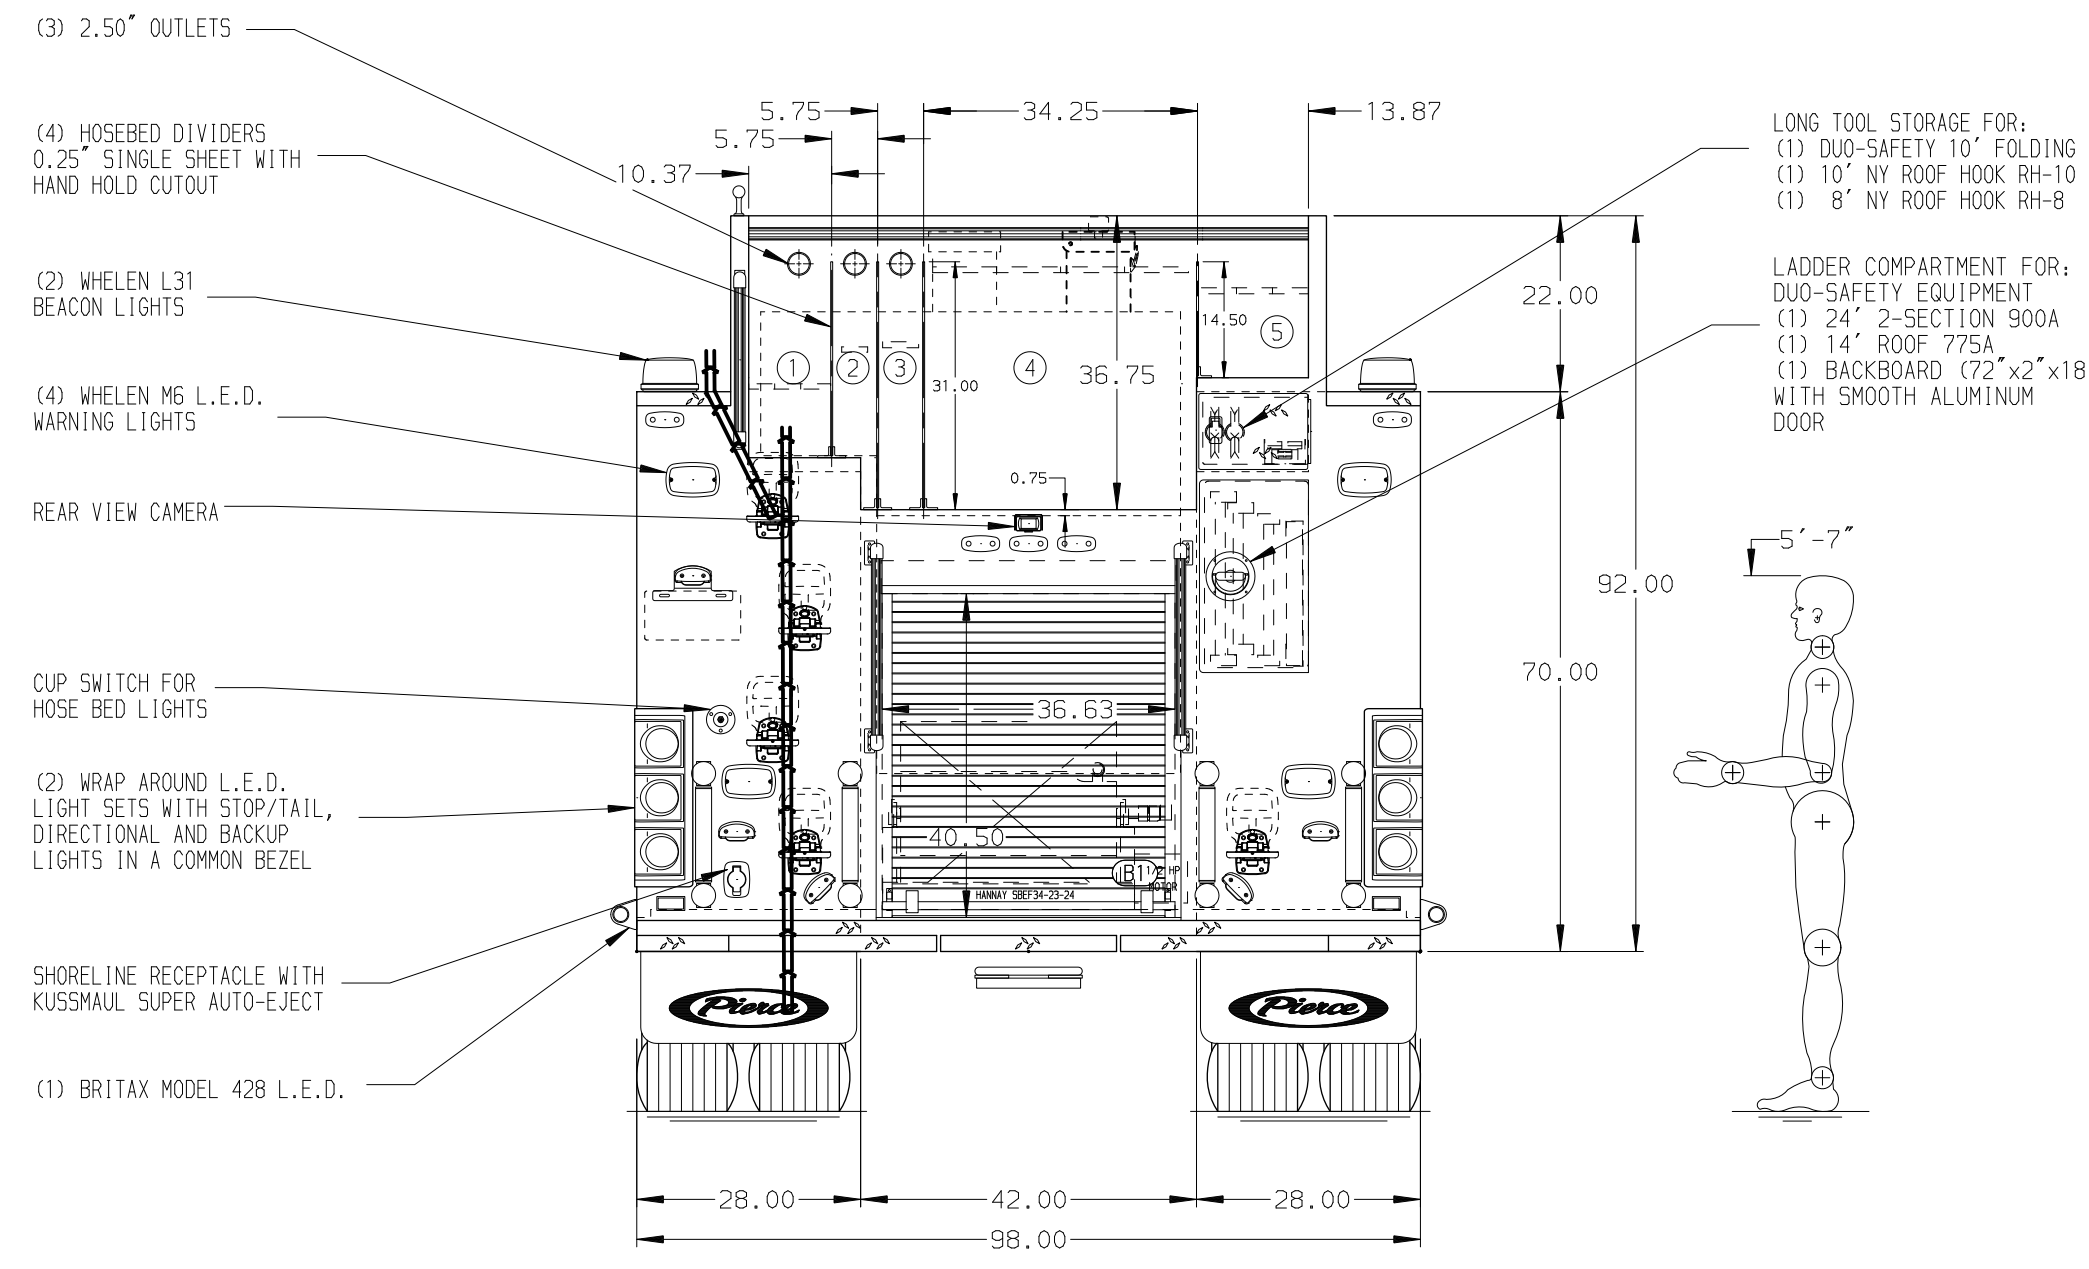

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- 2. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
- 3. ONE 120V 7-PLACE RECEPTACLE STRIP MOUNTED IN CAB PER SHOP ORDER
- 4. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED PER SHOP ORDER

CUSTOMER APPROVAL			
APPROVED BY:		CHASSIS DATA	TITLE
DATE:		MAKE	FOR
		PIERCE	DWG NO.
		MODEL	
REV	DATE	BY	CH
			ENFORCER

Pierce MANUFACTURING INC.

1500-D-750P, 730G WATER W/20G FOAM, 189" RESCUE PUC LADDERS IN RS BODY, (2) XLAYS, (1) DEADLAY, DELUGE WICHITA FALLS TEXAS FIRE DEPARTMENT WICHITA FALLS, TEXAS

37747AD-SH1

JOB NO.	37747-01-08
SCALE	1:24
DATE	
DRAWN BY	JJB
CHECKED BY	WKL
SHEET SIZE	D
SHEET NO.	1 OF 2