PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Velocity Chassis (Medium Block)

CHASSIS

AXLE, FRONT, CUSTOM

19,500 lb Meritor Axle

124.00 (10**'**-4**"**)

0.A.H.

AXLE, REAR

27,000 lb Meritor Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

22" Extended Painted Steel

CAB

7010 Velocity FR Cab

BODY

WATER TANK

750 Gallon Poly Water Tank

COMPT, PUMPER, REAR

51.25″ FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE

152" Rollup Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE

152" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE

52″ Control Zone Top Mount

PUMP

1250 GPM Waterous CS

CROSSLAYS, 1.50"

1.50" Crosslays Not Required

CROSSLAYS, 2.50" 2.50" Crosslay Not Required

SPEEDLAYS

(2) 1.50" W/Tray Std. Capacity


GENERATOR Honda EM5000

Foam System Foam System Not Required

Foam Cell

Foam Cell Not Required

Side Roll and Frontal Impact Protection

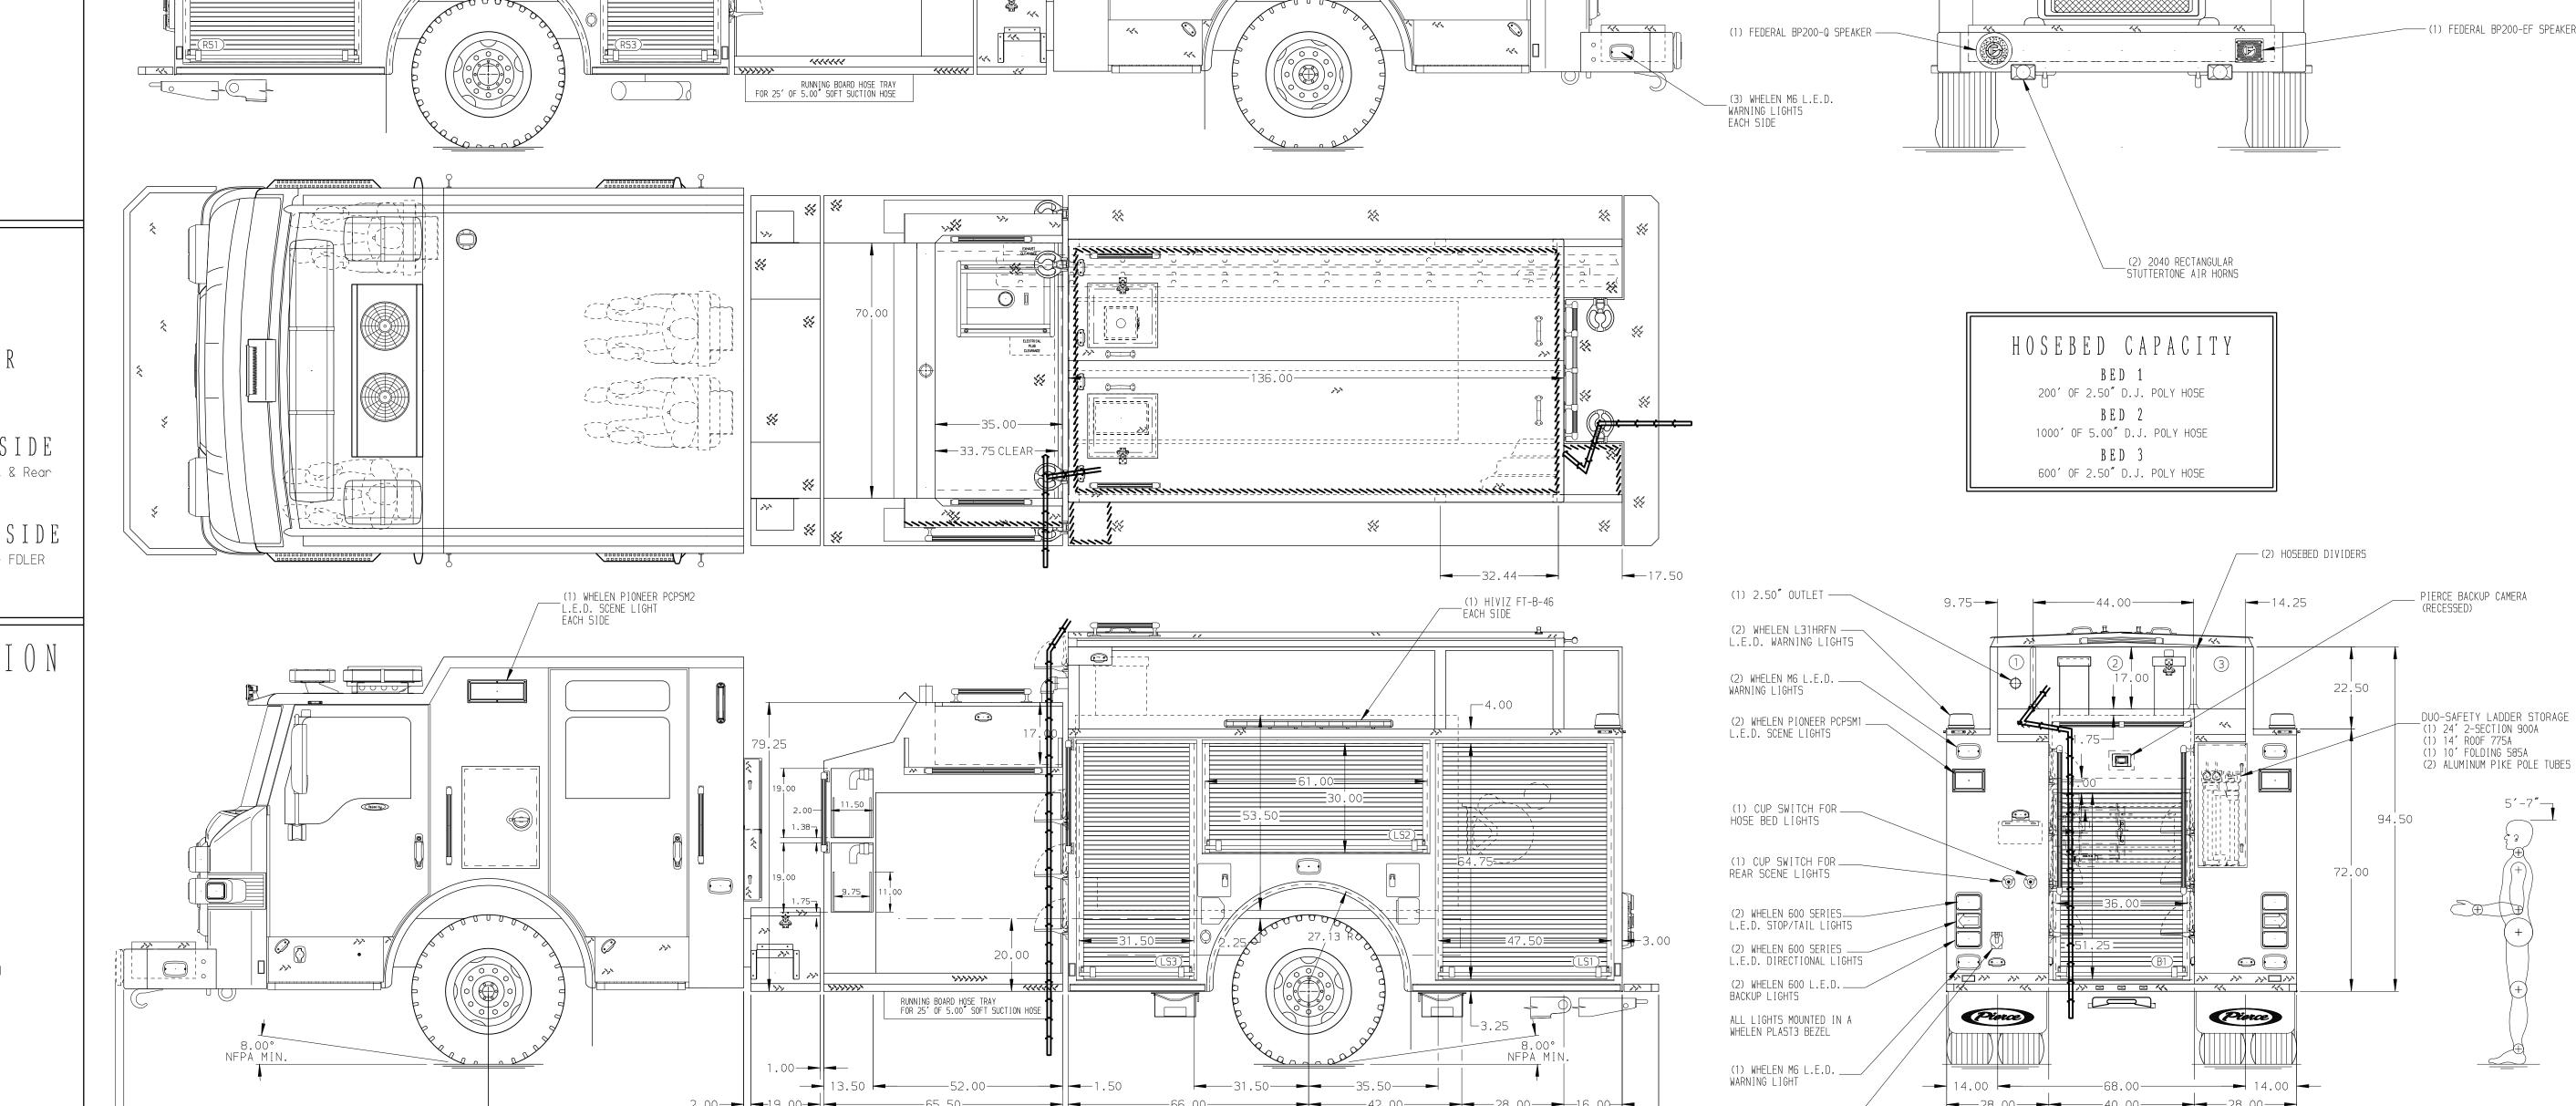

—155.00 CA—

—225.00 WB—

12. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 W/ 200' OF 10/3 YELLOW CORD LOCATED IN COMPARTMENT B1

-423.25 (35′-3.25″) APPROX OAL

11. THREE VERTICAL PARTITIONS LOCATED PER SHOP ORDER

_WHELEN PSTANK2 L.E.D. WATER LEVEL GAUGE

_(1) WHELEN FREEDOM IV 21.50″ L.E.D. LIGHTBAR EACH SIDE

RETRAC HEATED/REMOTE — CONTROL MIRRORS WITH CONVEX SECTION

(2) WHELEN M6 L.E.D. —— WARNING LIGHTS IN A COMMON BEZEL EACH SIDE

(1) 120V RECEPTACLE -

CHASSIS DATA

MAKE

PIERCE

MODEL LOCIT

10.00

APPROVED BY:

REV DATE BY

DATE:

CUSTOMER APPROVAL

__(1) WHELEN P*H2* L.E.D. VISOR LIGHT

_WHELEN FREEDOM IV 81″L.E.D. LIGHTBAR WITH OFFSET BRACKET

(2) WHELEN M6 L.E.D. WARNING LIGHTS EACH SIDE IN A COMMON BEZEL

5'-7"—

JOB NO. 37776

DATE

03MAY22

03MAY22

SHEET NO.

SCALE

1:24

DRAWN BY

MMF

CHECKED BY

COL

SHEET SIZE

MANUFACTURING INC.

Pierce Pumper Approval Drawing

Bonita Springs Fire Control & Rescue District

37776AD

STORAGE COMPARTMENT FOR (2) BACKBOARDS (3.5″ X 17.5″ X 74″)

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY 2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE STEPWELL . AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
. BATTERY CHARGER LOCATED PER ORDER

-100.00-

BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER SEAT RISER WITH BRACKET
ELEVEN ADJUSTABLE SHELVES LOCATED PER ORDER ONE FIXED SHELF LOCATED PER SHOP ORDER

8. TWO FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
9. TWO SLIDE-OUT TRAYS LOCATED PR SHOP ORDER
10. TWO SLIDE-OUT TOOLBOARDS LOCATED PER SHOP ORDER

→ 2.25

CONSTRUCTION.

MINOR DETAILS NOT SHOWN.