

**PUMPER  
BODY**

Long Aluminum 2nd Gen Pumper

**CHASSIS**

Sober FR Chassis

**CHASSIS  
AXLE, FRONT, CUSTOM**

20,000 Lb Dana Axle

**AXLE, REAR**

27,000 Lb Dana Axle

**ENGINE**

450 HP Cummins L9 Engine

**TRANSMISSION**

Allison 5th Gen, 3000 EVS P

**BUMPER**

19" Extended Stainless Steel

**CAB**

7010 Sober FR Cab

**BODY  
WATER TANK**

1000 Gallon New York Style Water Tank

**COMPT, PUMPER, REAR**

23.50" FF RollUp Rear Compt

**COMPT, PUMPER, LEFT SIDE**

171" RollUp Full Height & Depth Front & Rear

**COMPT, PUMPER, RIGHT SIDE**

171" RollUp Full Height & Depth Front & Rear

**FIRE SUPPRESSION  
PUMPHOUSE**

45" Control Zone Side Mount

**PUMP**

1500 GPM Waterous CSU

**CROSSLAYS, 1.50"**

(2) 1.50" Standard Capacity

**CROSSLAYS, 2.50"**

2.50" Crosslay Not Required

**SPEEDLAYS**

Speedlays Not Required

**GENERATOR**


Generator Not Required

**Foam System**

Husky 3 Single Agent Foam System

**Foam Cell**

20 Gallon Foam Cell, Not Reduced Water

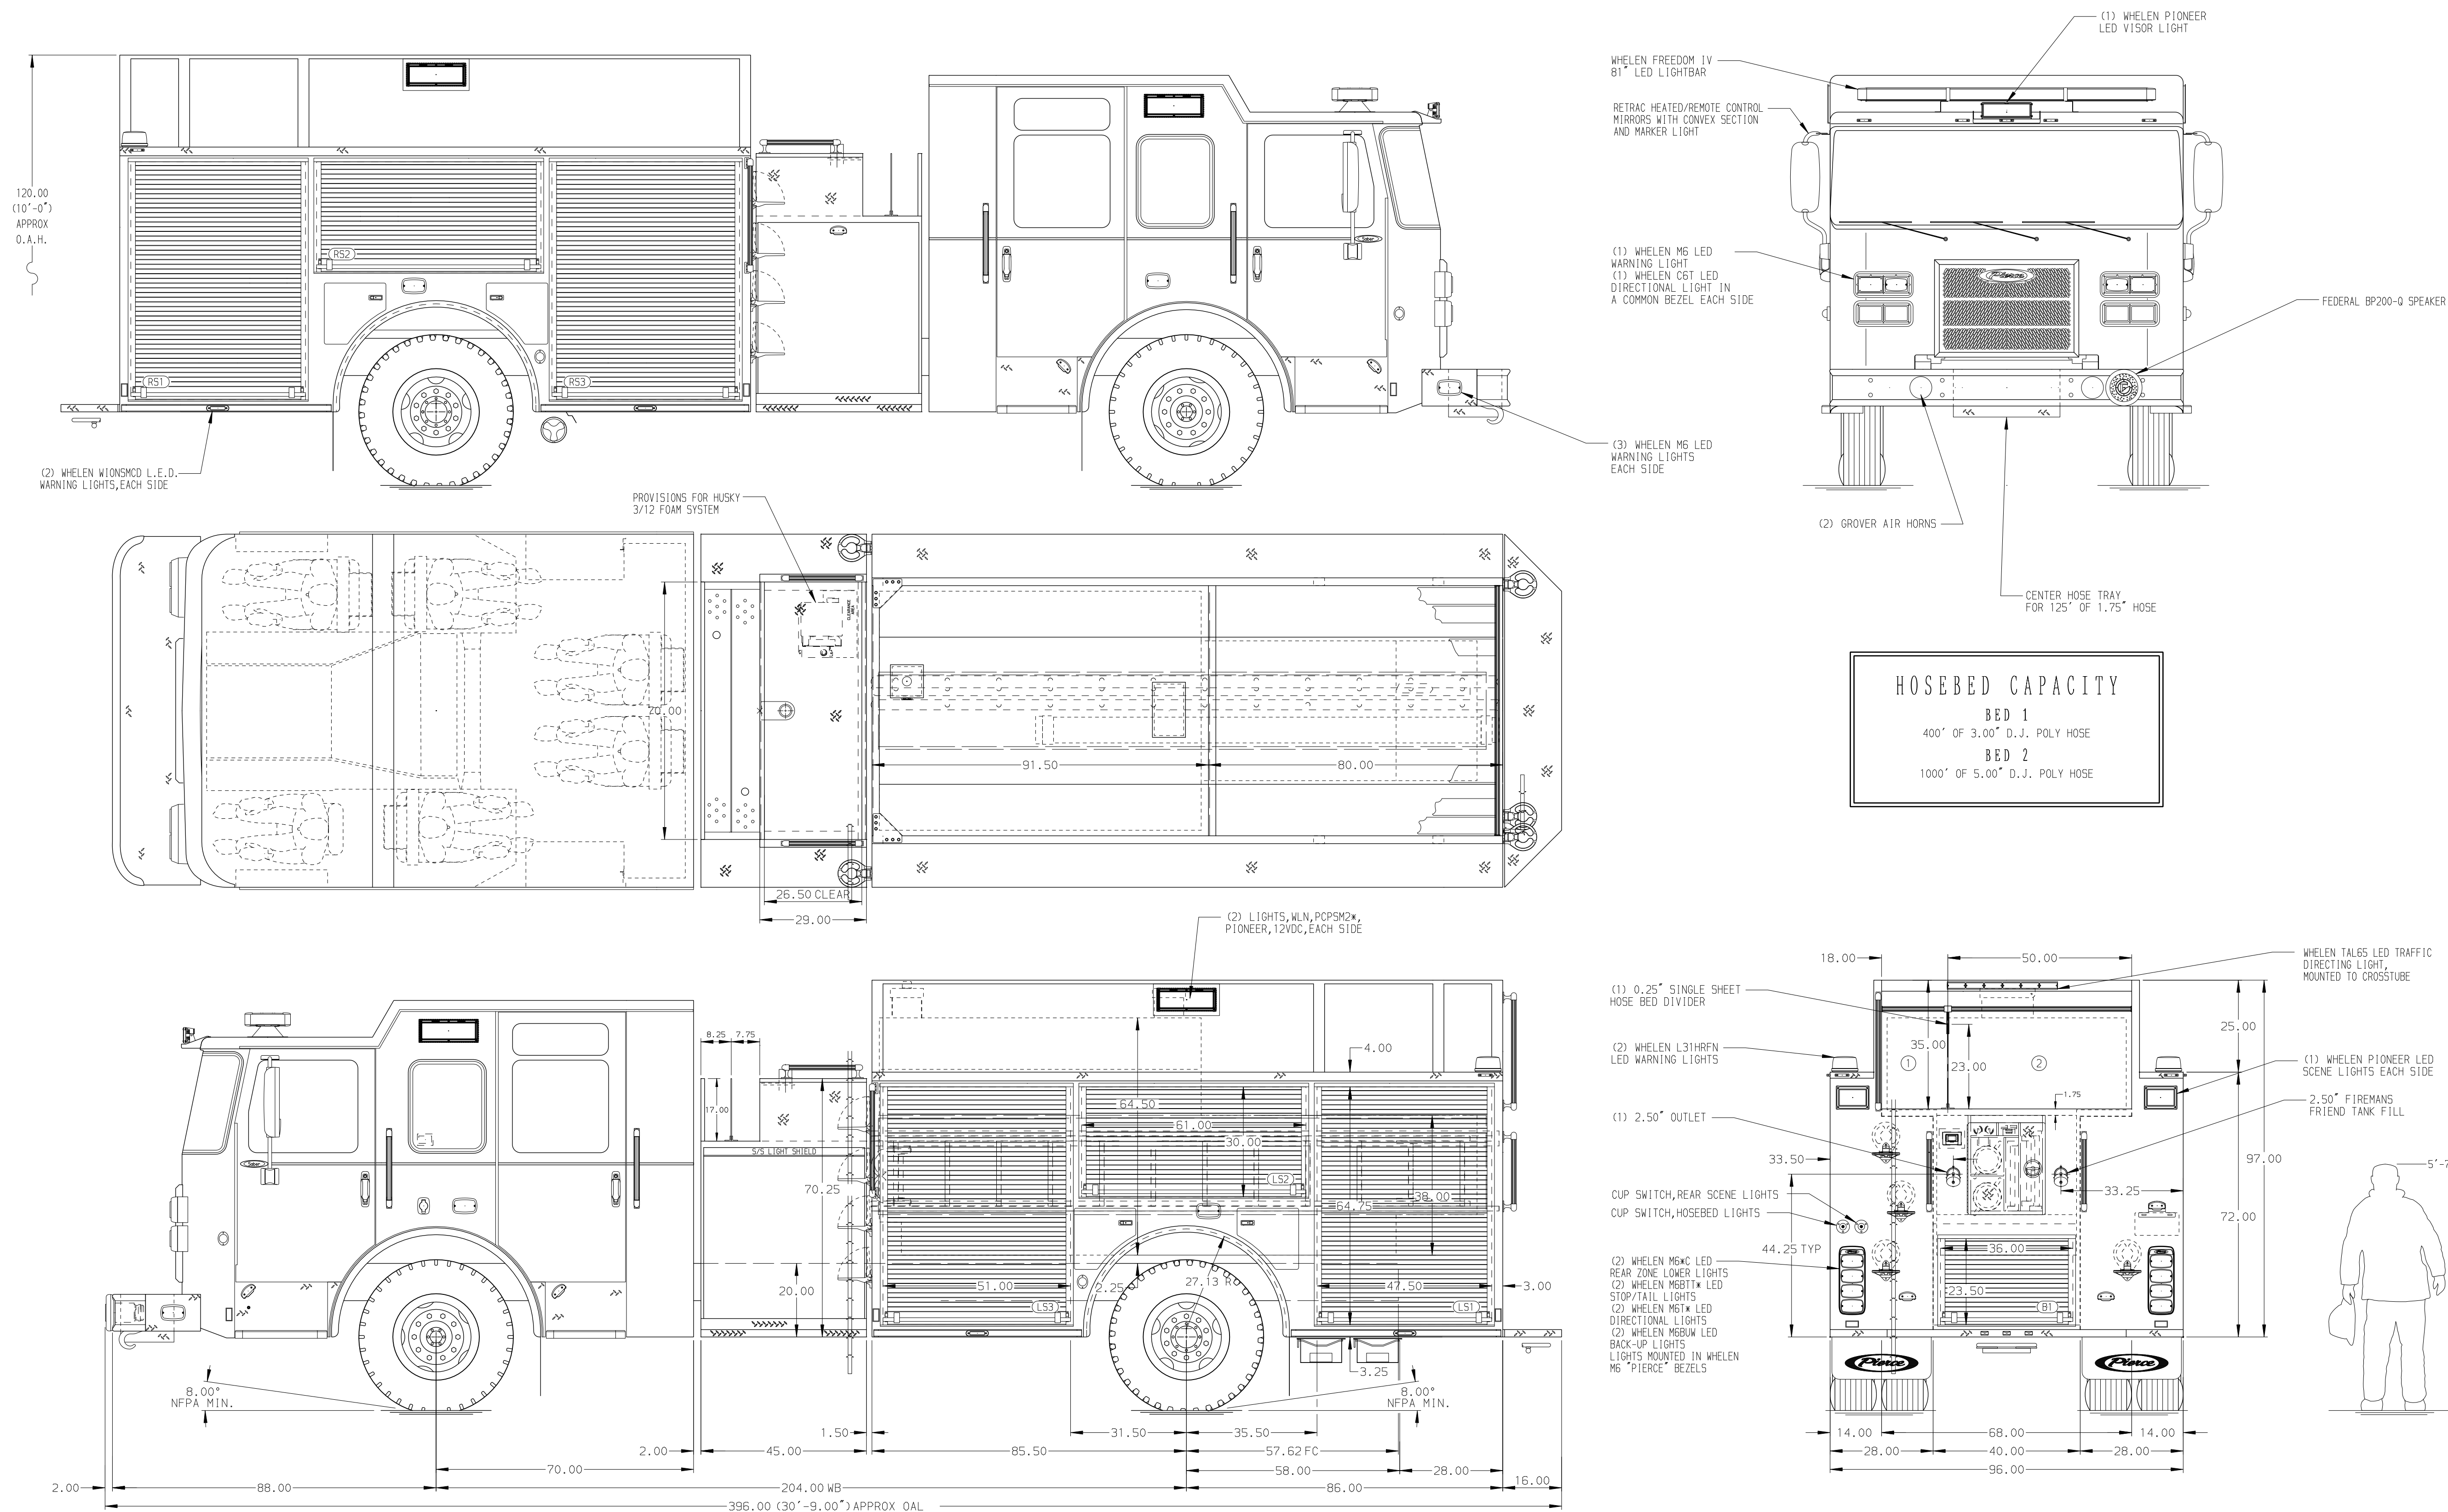

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE THROUGH WINDOW
6. SIX ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. PLUMBING FOR FUTURE HUSKY FOAM SYSTEM

				<b>Pierce MANUFACTURING INC.</b>		JOB NO.	37832
						SCALE	DATE
						DRAWN BY	04FEB22
						CHECKED BY	04FEB22
						SHEET SIZE	SHEET NO.
						D	1 OF 1

CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
MAKE	FOR	Pierce Field Unit Bradenton, Florida
MODEL	DWG NO.	37832AD
REV	DATE	BY
CH		