

# PUMPER BODY

Medium Aluminum 2nd Gen Pumper

# CHASSIS

Enforcer Chassis

# CHASSIS AXLE, FRONT, CUSTOM

18,000 Lb Dana Axle

# AXLE, REAR

27,000 Lb Meritor Axle

# ENGINE

450 HP Cummins L9 Engine

# TRANSMISSION

Allison 5th Gen, 3000 EVS P

# BUMPER

10" Extended Stainless Steel

# CAB

7010 Enforcer Cab

# BODY

# WATER TANK

750 Gallon New York Style Water Tank

# COMPT, PUMPER, REAR

30.75" FF Rear Compt

# COMPT, PUMPER, LEFT SIDE

140" Lap Full Height Front & Rear FDLER

# COMPT, PUMPER, RIGHT SIDE

140" Lap, Low, FDLER

# FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

# PUMP

1500 GPM Waterous CSU

# CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

# CROSSLAYS, 2.50"

(1) 2.50" Standard Capacity

# SPEEDLAYS

Speedlays Not Required

# GENERATOR

Generator Not Required

# Foam System

Foam System Not Required

# Foam Cell


Foam Cell Not Required

Side Roll and Frontal Impact Protection

# NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHOULDER RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
- WHEEL CHOCKS SHIPPED LOOSE

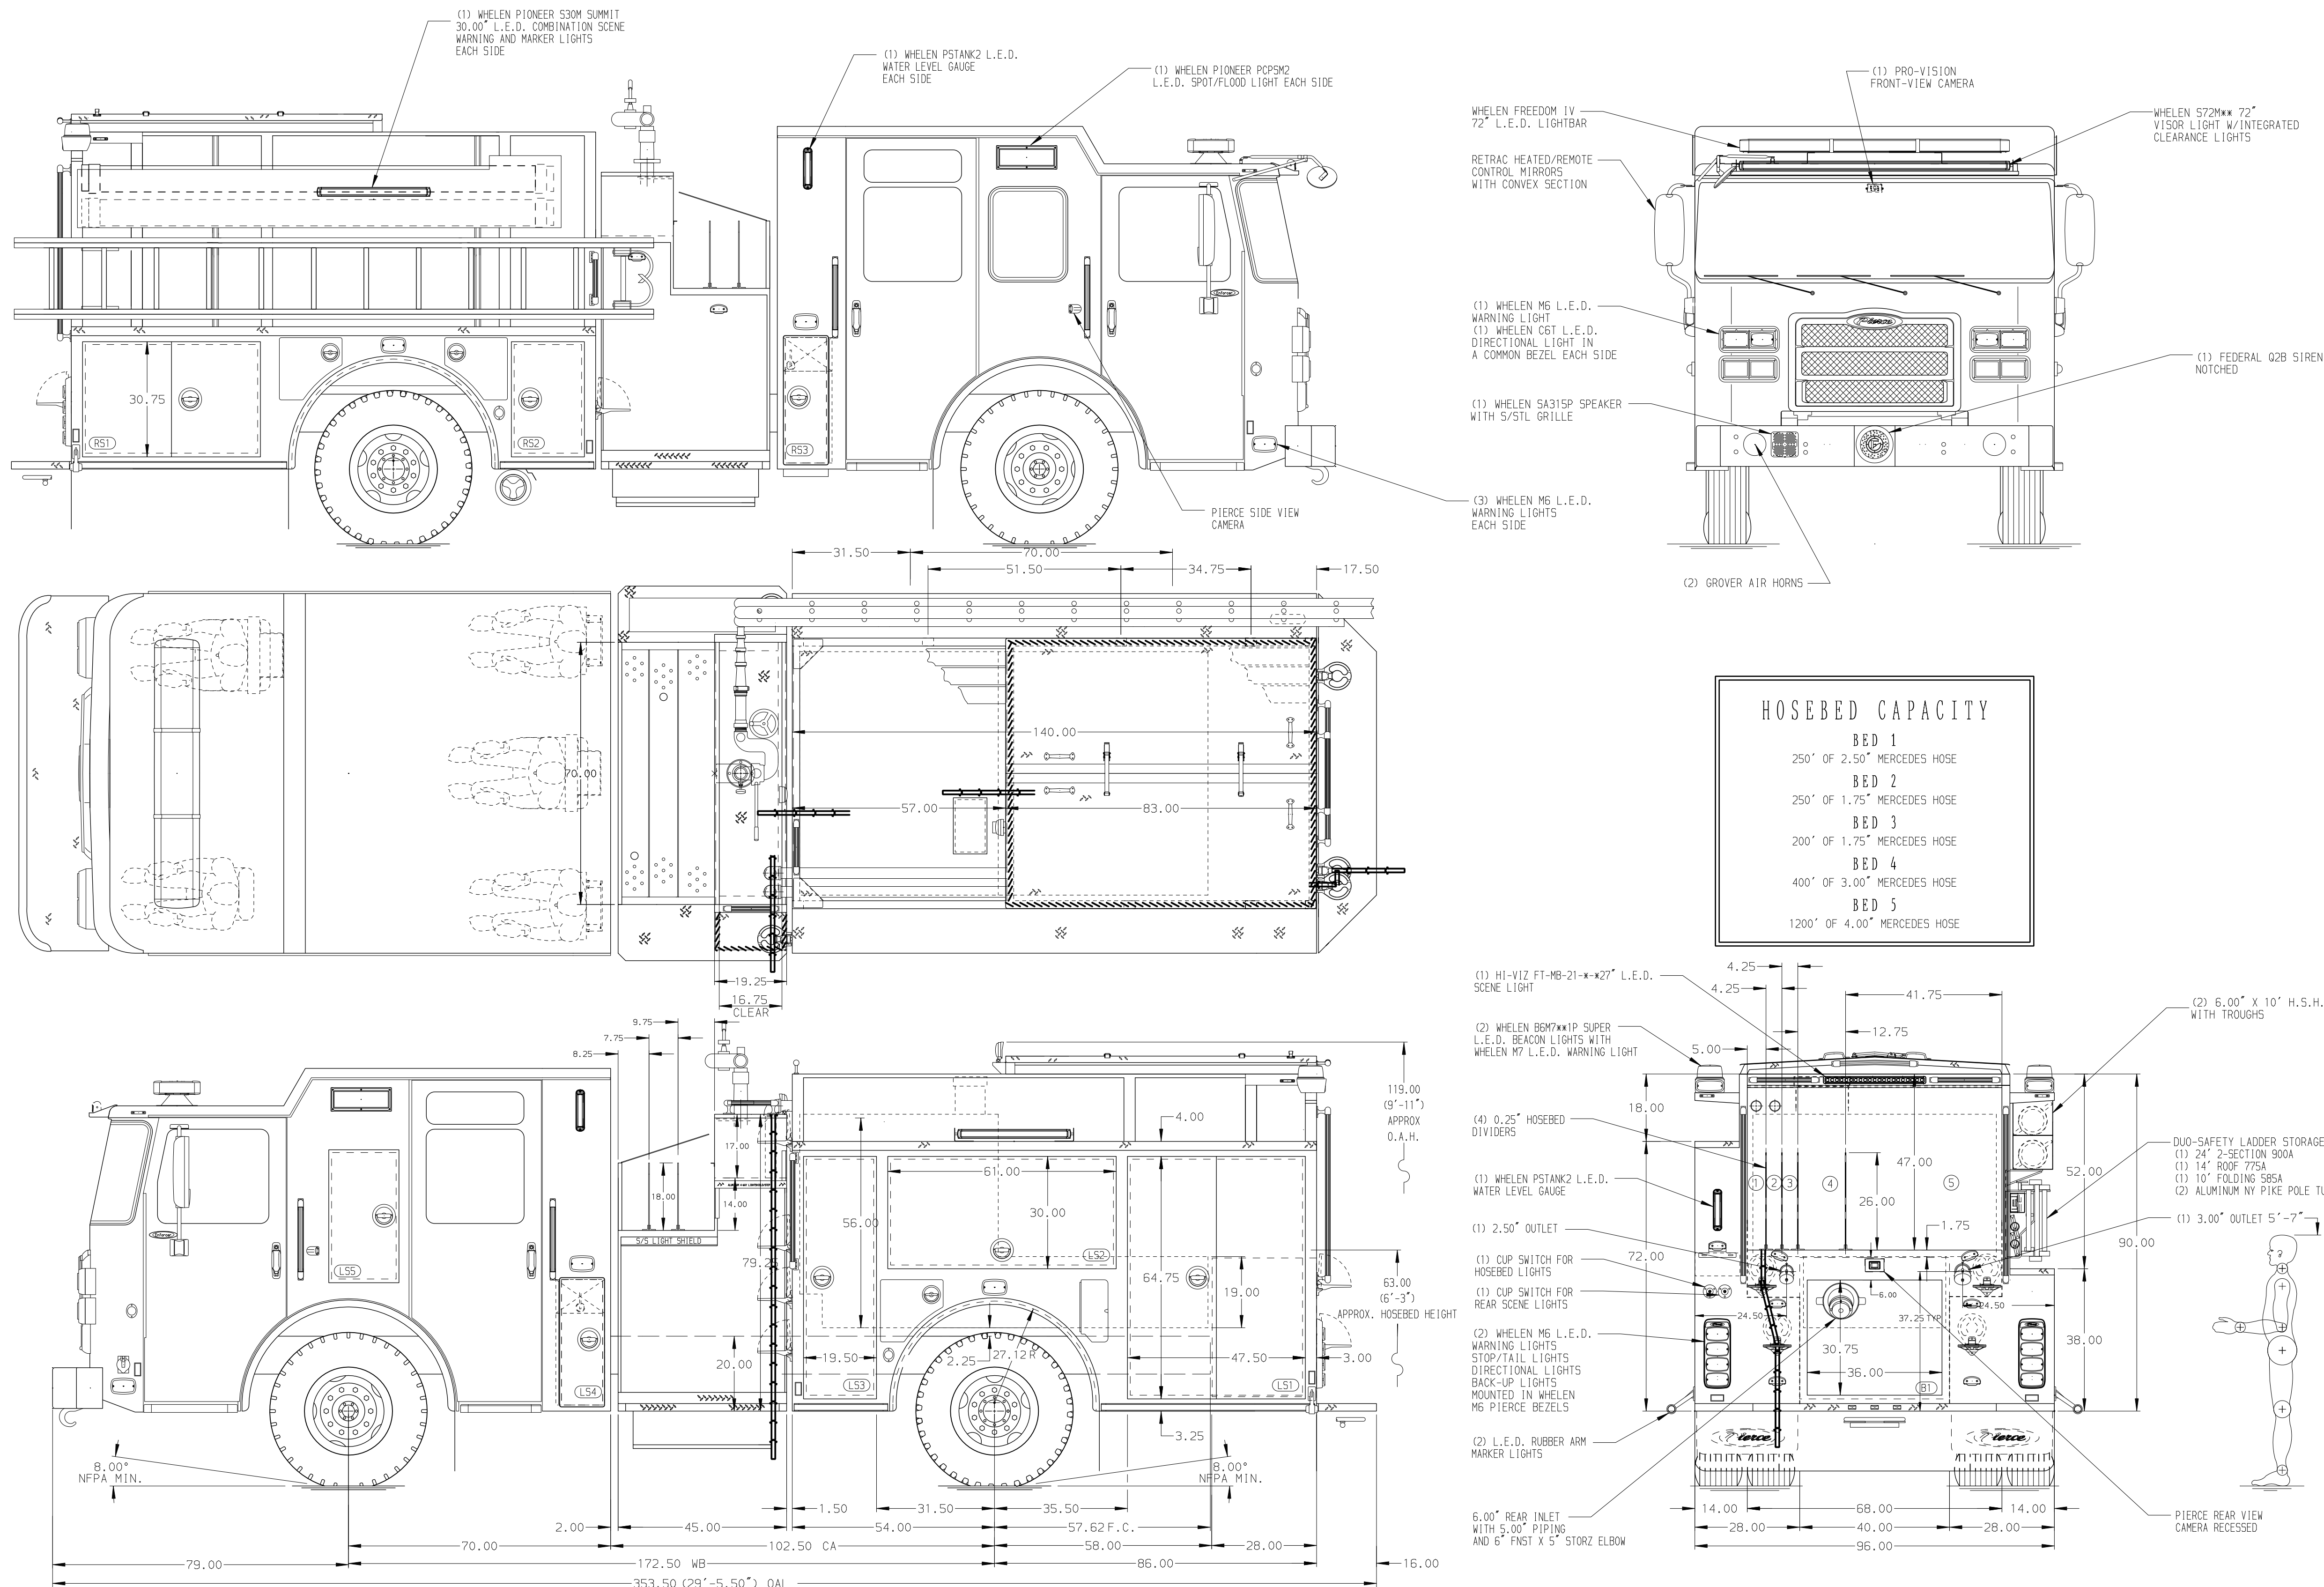

# CUSTOMER APPROVAL

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_



JOB NO. 37871

SCALE 1:24 DATE

DRAWN BY -

CHECKED BY COL 31 JAN 22

SHEET SIZE D SHEET NO. 1 OF 1

CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
MAKE	FOR	Scarborough Fire Department
PIERCE	DWG NO.	37871AD
MODEL		
ENFORCER		

37871AD