


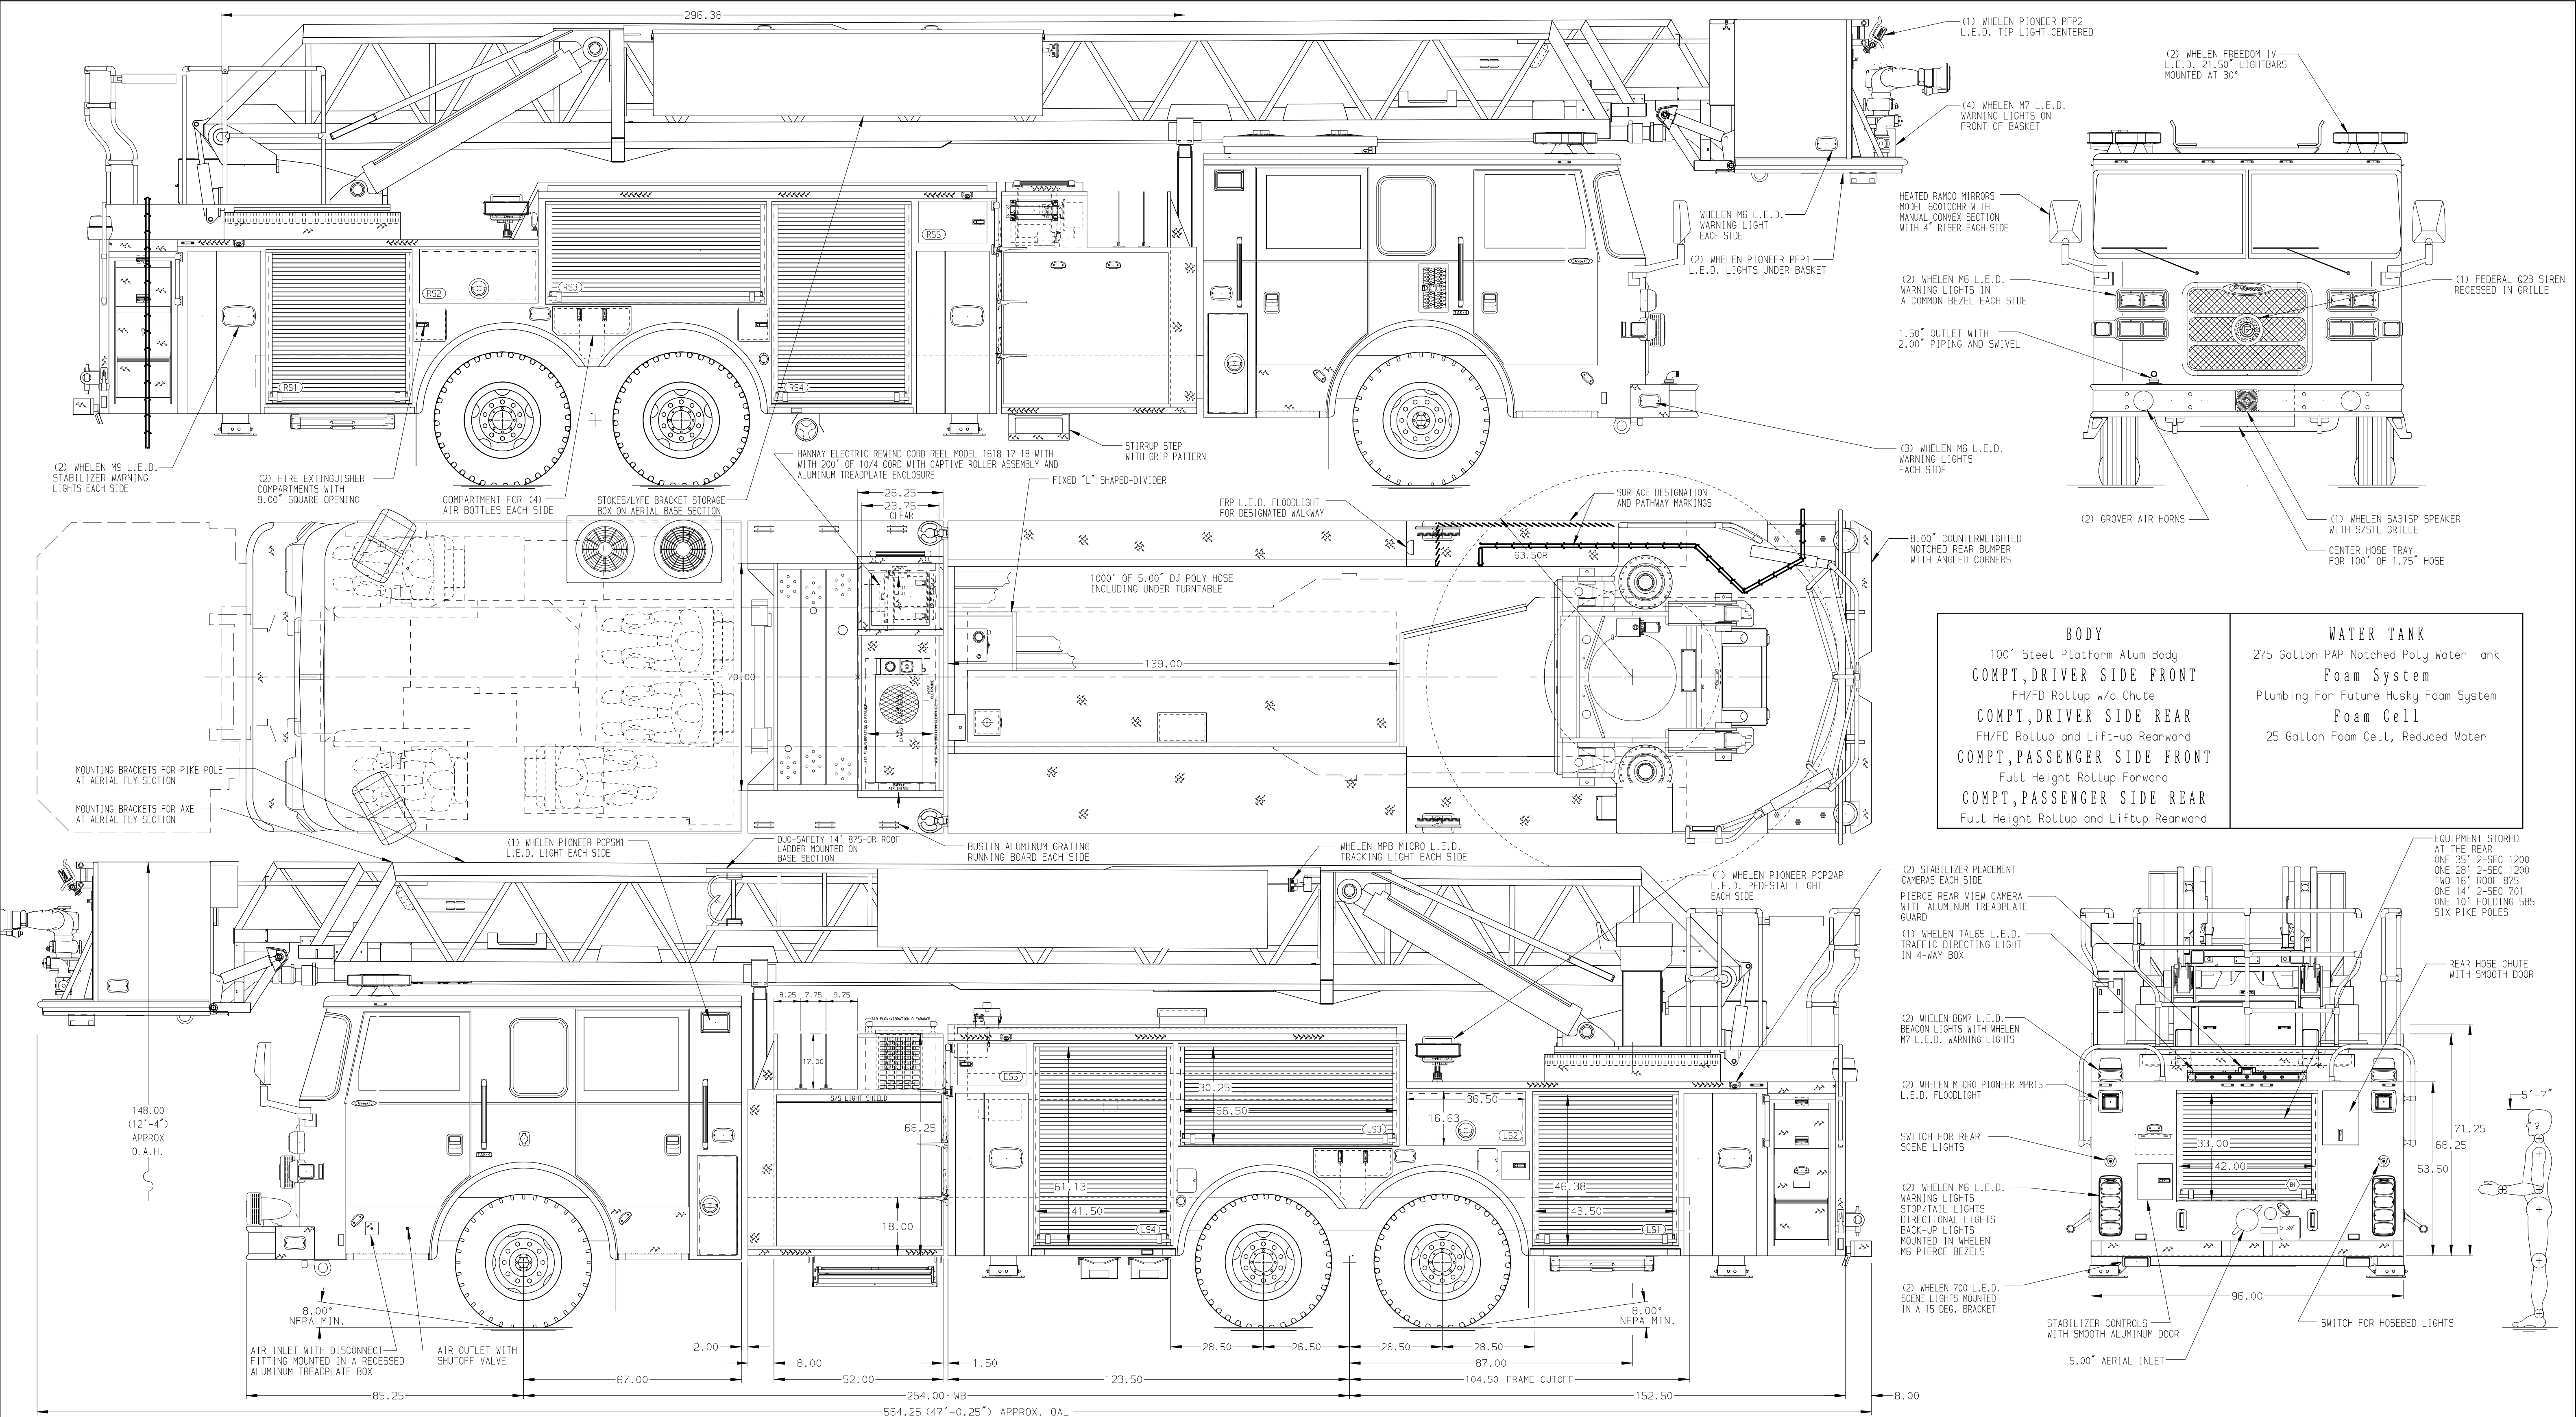

BODY	WATER TANK
100' Steel Platform Alum Body	275 Gallon PAP Notched Poly Water Tank
COMPT, DRIVER SIDE FRONT	Foam System
FH/FD Rollup w/o Chute	Plumbing For Future Husky Foam System
COMPT, DRIVER SIDE REAR	Foam Cell
FH/FD Rollup and Lift-up Rearward	25 Gallon Foam Cell, Reduced Water
COMPT, PASSENGER SIDE FRONT	
Full Height Rollup Forward	
COMPT, PASSENGER SIDE REAR	
Full Height Rollup and Liftup Rearward	

CHASSIS	CAB	AXLE, FRONT, CUSTOM	TRANSMISSION	PUMPHOUSE	CROSSLAYS, 1.50"	SPEEDLAYS		CUSTOMER APPROVAL	Pierce MANUFACTURING INC.		JOB NO.	37879
Arrow XT Chassis ENGINE 605 HP Cummins X15 Engine	6700 Arrow XT Cab BUMPER 16" Extended Stainless Steel	24,000 Lb TAK-4 Axle AXLE, REAR 58,000 Lb Meritor Axle	Allison 5th Gen, 4500 EVS P	52" Control Zone Side Mount PUMP 2000 GPM Waterous CSU	(2) 1.50" Standard Capacity CROSSLAYS, 2.50" (1) 2.50" Standard Capacity	SpeedLays Not Required GENERATOR Harrison 6kW MCR Hydraulic	- - -	APPROVED BY: _____ DATE: _____			SCALE	1:24
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.		1. ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY 2. SHORELINE RECEPTACLE WITH KUSSMALL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB 3. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT 4. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER SEAT WITH BRACKET 5. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED 6. EIGHT ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER 7. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER 8. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENT PER SHOP ORDER 9. CIRCUIT BREAKER PANEL IN COMPARTMENT PER SHOP ORDER		10. HOSE STORAGE BOX ON RIGHT SIDE OF BASKET FOR 100' OF 1.75" D.J. POLY HOSE 11. BREATHING AIR TO AERIAL BASKET 12. 3.00" RAISED AERIAL PEDESTAL 13. 3-in-1 LYFECOMBO BRACKETS AT AERIAL BASKET 14. 120V POWER TO AERIAL BASKET 15. NO LIMITED RETRACTION 16. ONE SWING-OUT TOOLBOARD IN COMPARTMENT PER SHOP ORDER 17. RUNG LIGHT IN ON AERIAL LADDER		(MAX. OAH = 148.00" (12'-4.00")) (MIN. ANGLE OF APPROACH (LOADED) 12.00° (MIN. ANGLE OF DEPARTURE (LOADED) 12.00° EXCEEDED)		CHASSIS DATA MAKE PIERCE MODEL ARROW XT		TITLE 100 AERIAL PLATFORM & BODY ASSEMBLY (PAP100A)	DRAWN BY LWE	04MAR22
										FOR TUSCALOOSA FIRE RESCUE SERVICE TUSCALOOSA, AL	CHECKED BY THS	04MAR22
										DWG NO. 37879AD	SHEET SIZE D	SHEET NO. 1 OF 1