


- HOSEBED CAPACITIES
- ① 400' OF 1.75" D.J. POLY HOSE
 - ② 300' OF 3.00" D.J. POLY HOSE
 - ③ 1500' OF 5.00" D.J. POLY HOSE

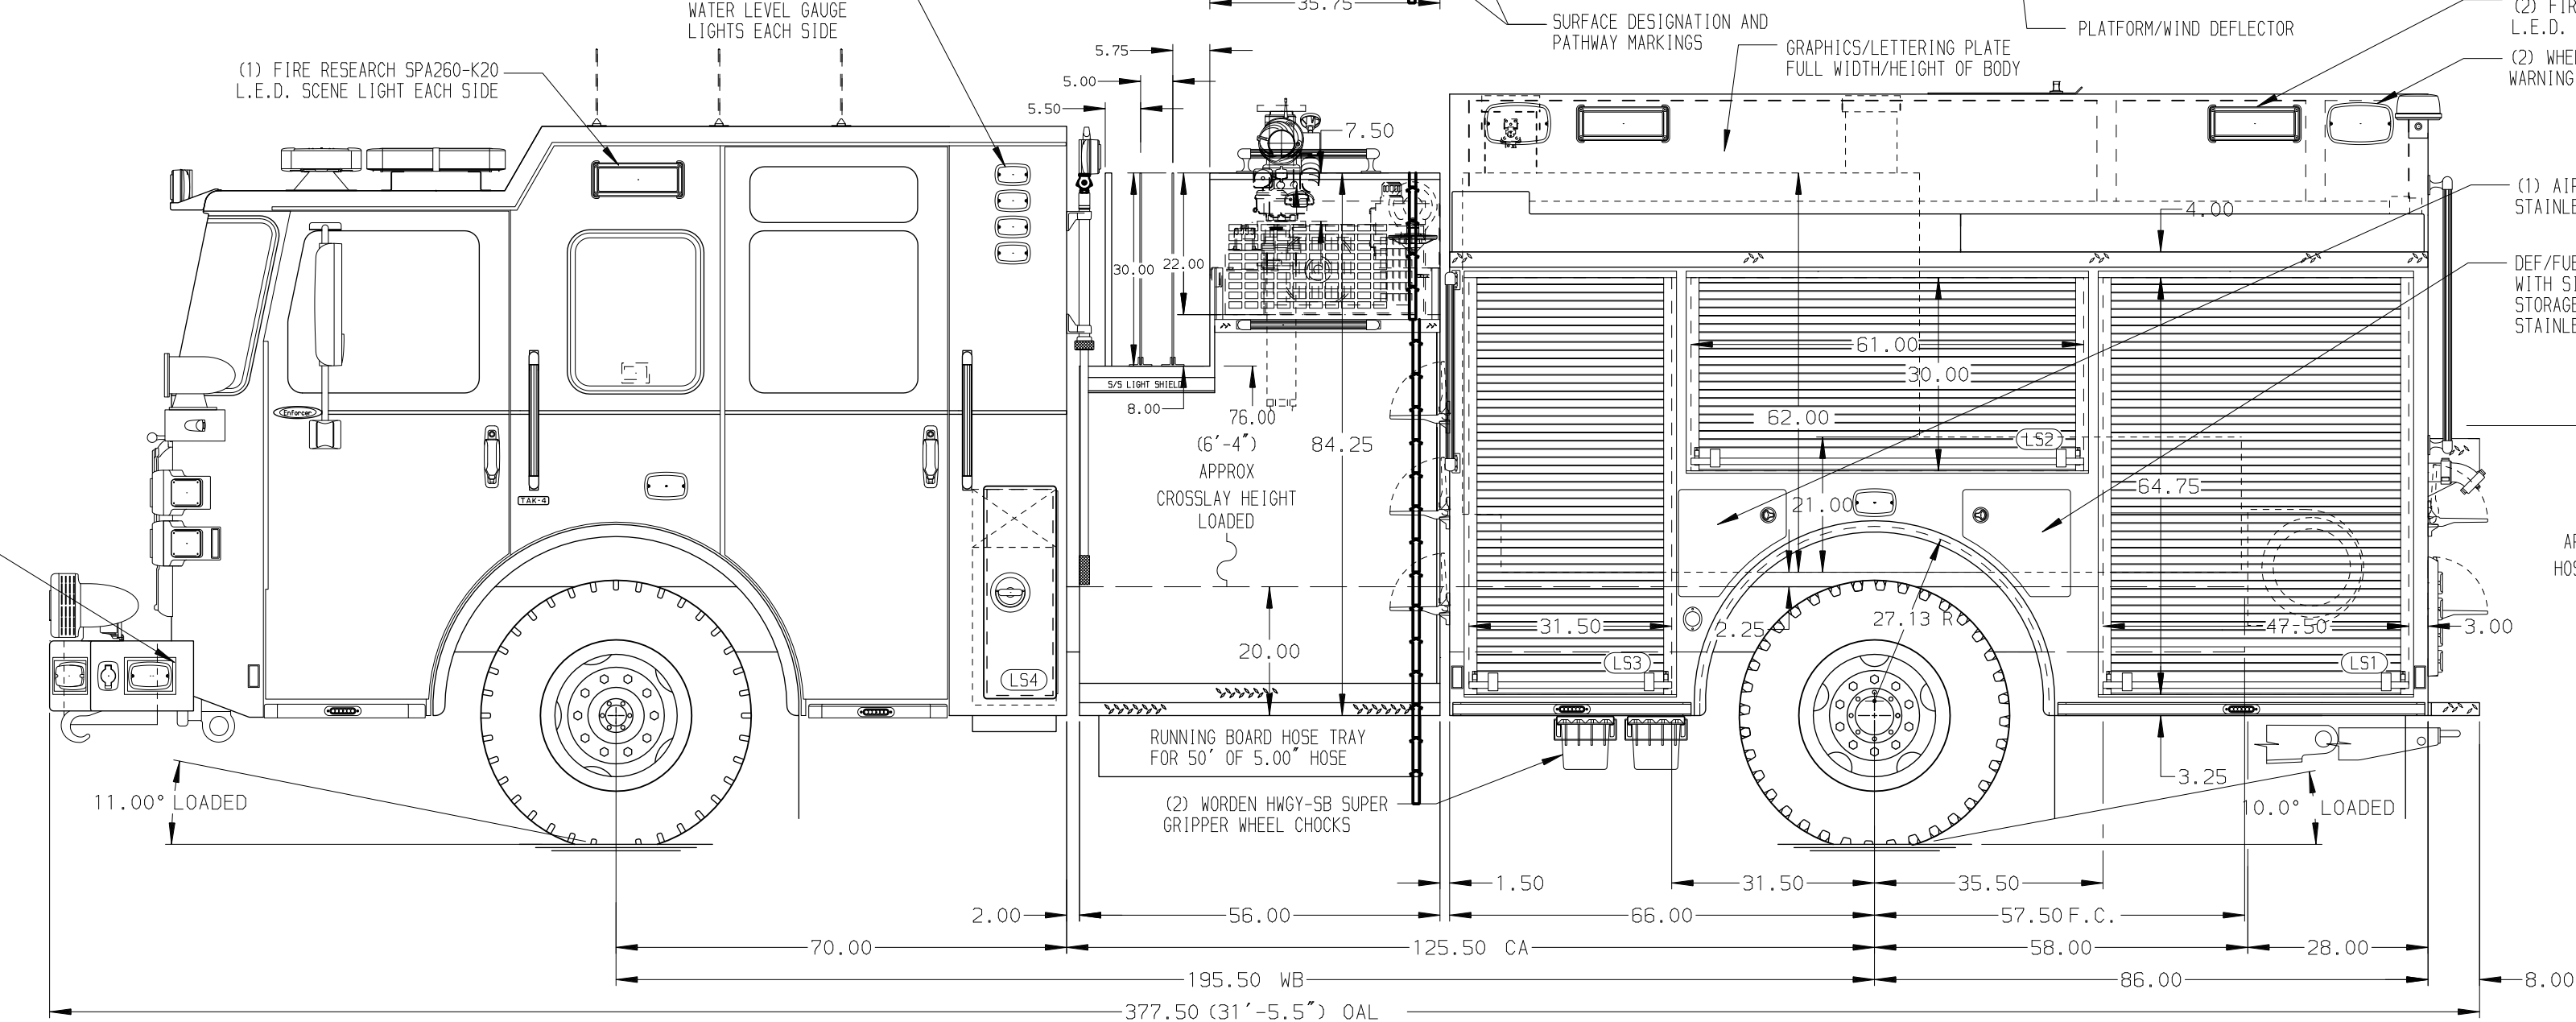

STAINLESS STEEL BODY MAXIMUM O.A.L. 377.50" MAXIMUM O.A.H. 126.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- 2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- 3. BATTERY CHARGER INDICATOR BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW
- 4. AIR INLET WITH DISCONNECT COUPLING LOCATED PER ORDER
- 5. CIRCUIT BREAKER PANEL LOCATED PER ORDER
- 6. SIX 120V DUPLEX RECEPTACLES LOCATED PER ORDER
- 7. PARTITION BETWEEN LS1/B1 AND RS1/B1

REV	DATE	BY	CH	ENFORCER
23JAN24	JAM	PHA		CHASSIS DATA
15NOV23	JAM	PHA		MAKE
11OCT23	LME	PHA		PIERCE
30JUN23	LME	PHA		MODEL
12APR23	LME	PHA		

Pierce MANUFACTURING INC.

JOB NO. 37973

SCALE 1:24 DATE

TITLE 2000-D-1050P, 1000 WATER W/ 50 FOAM, 152" BODY (3) CROSSLAYS, DELUGE, GENERATOR, LADDER BRACKETS

FOR GLEN MOORE FIRE COMPANY NO. 1 GLEN MOORE, PENNSYLVANIA

DWG NO. 37973AD

CHECKED BY PHA DATE 03JAN23

SHEET SIZE D SHEET NO. 1 OF 1