

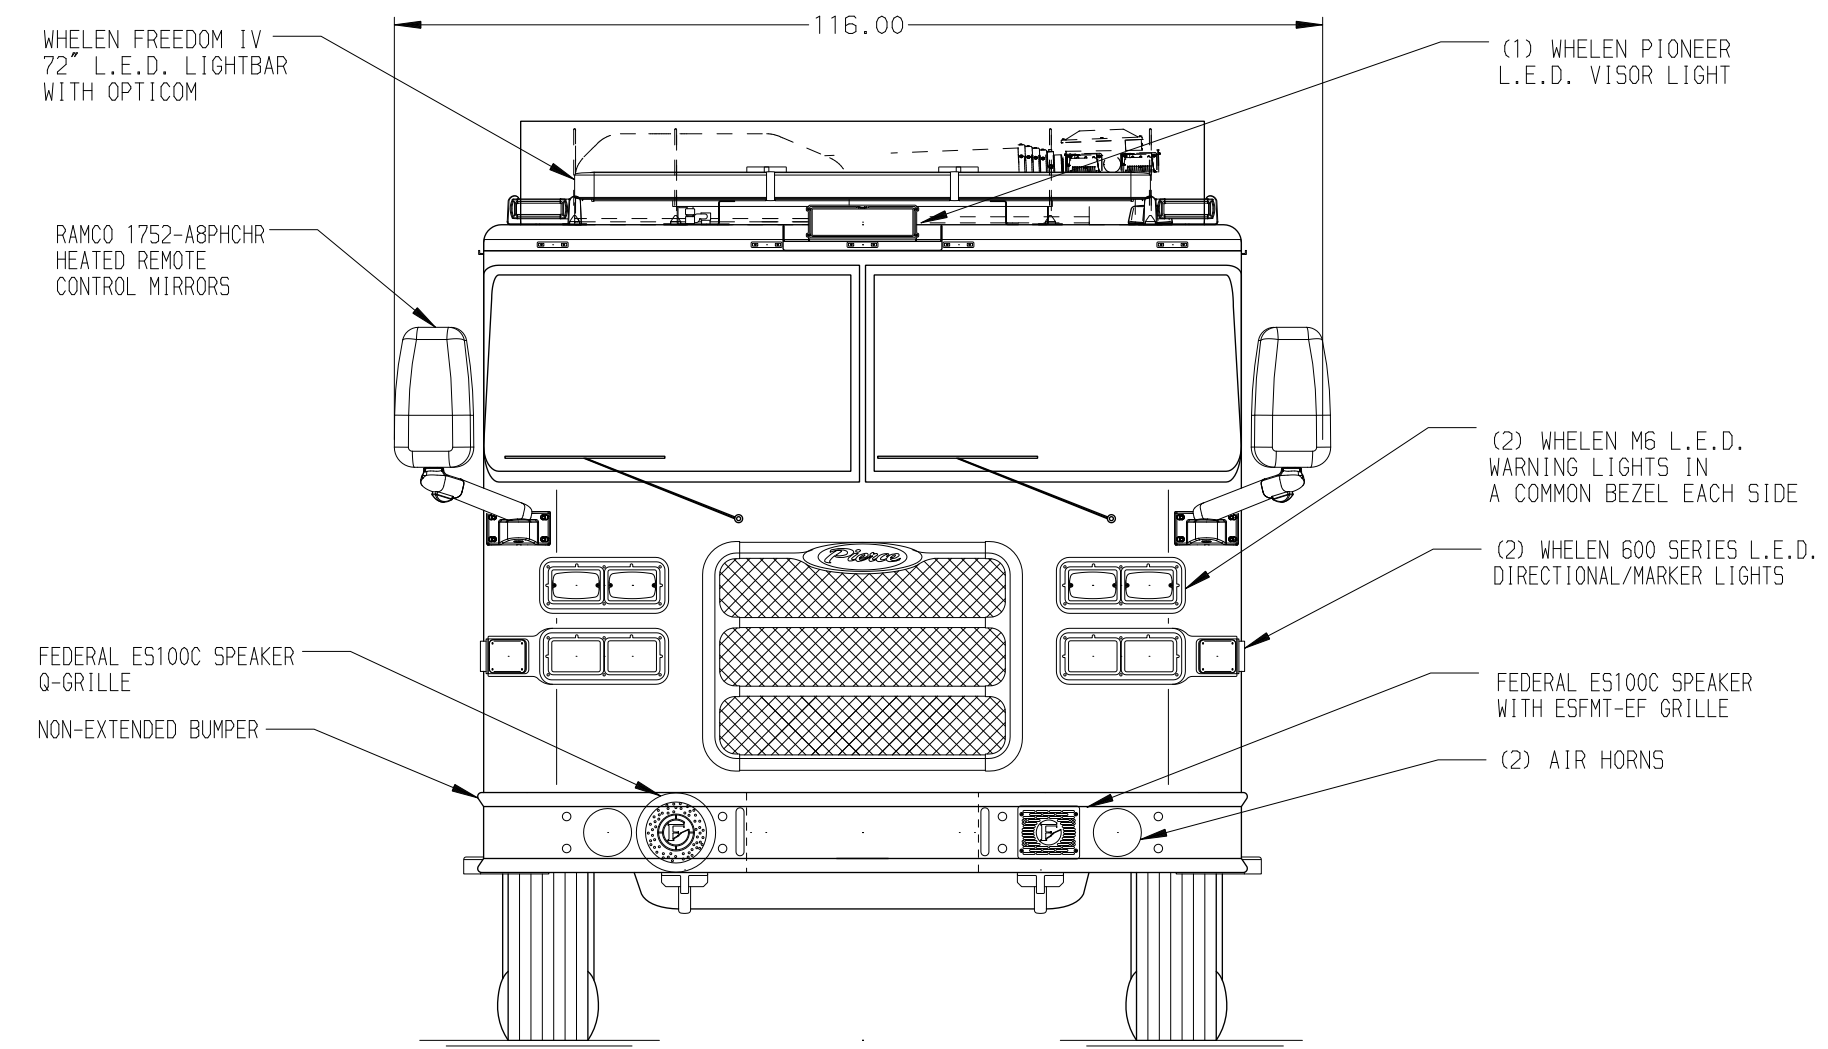
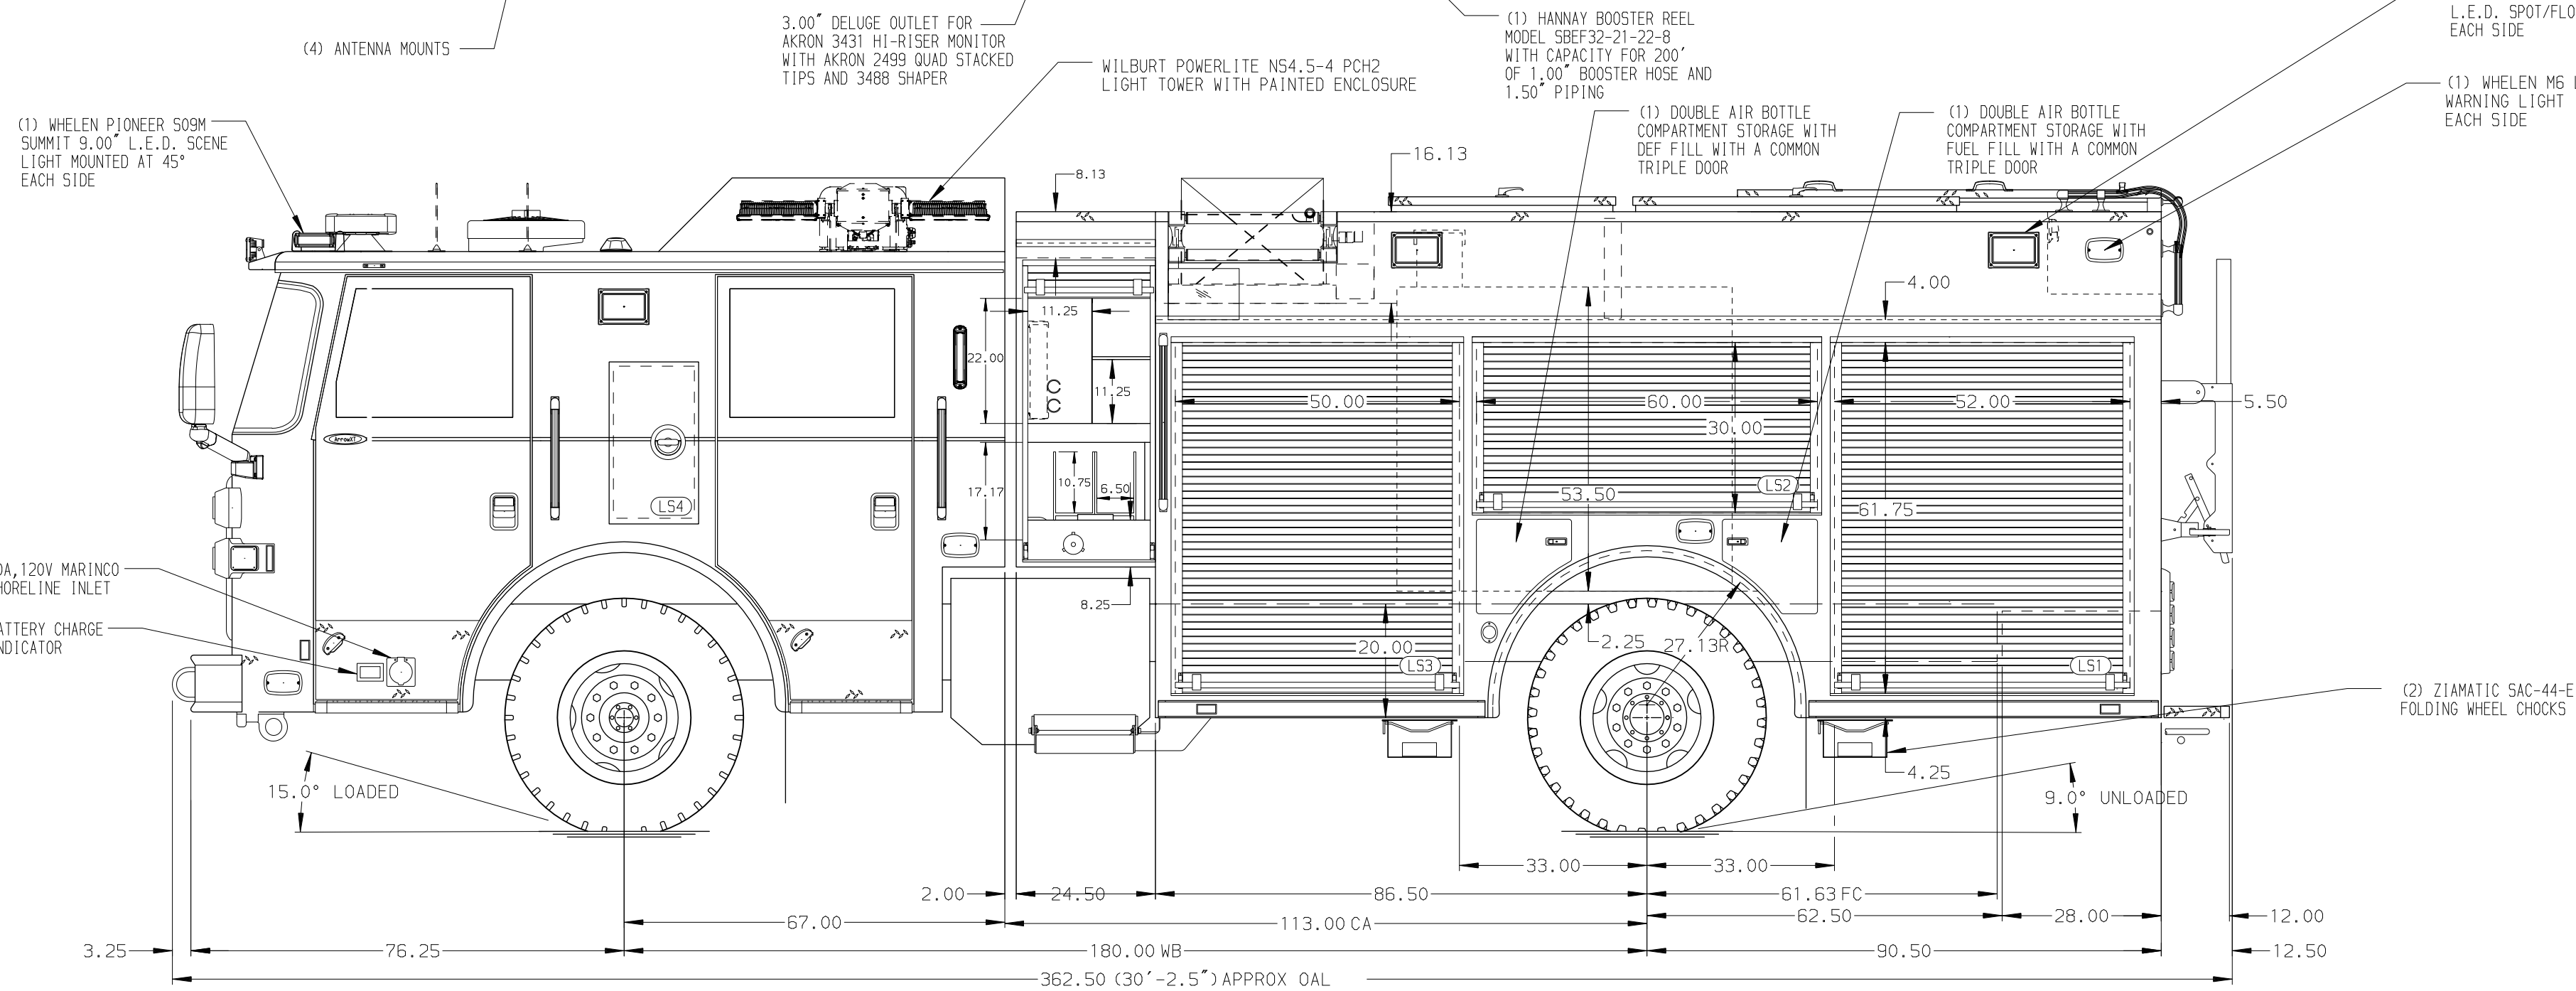
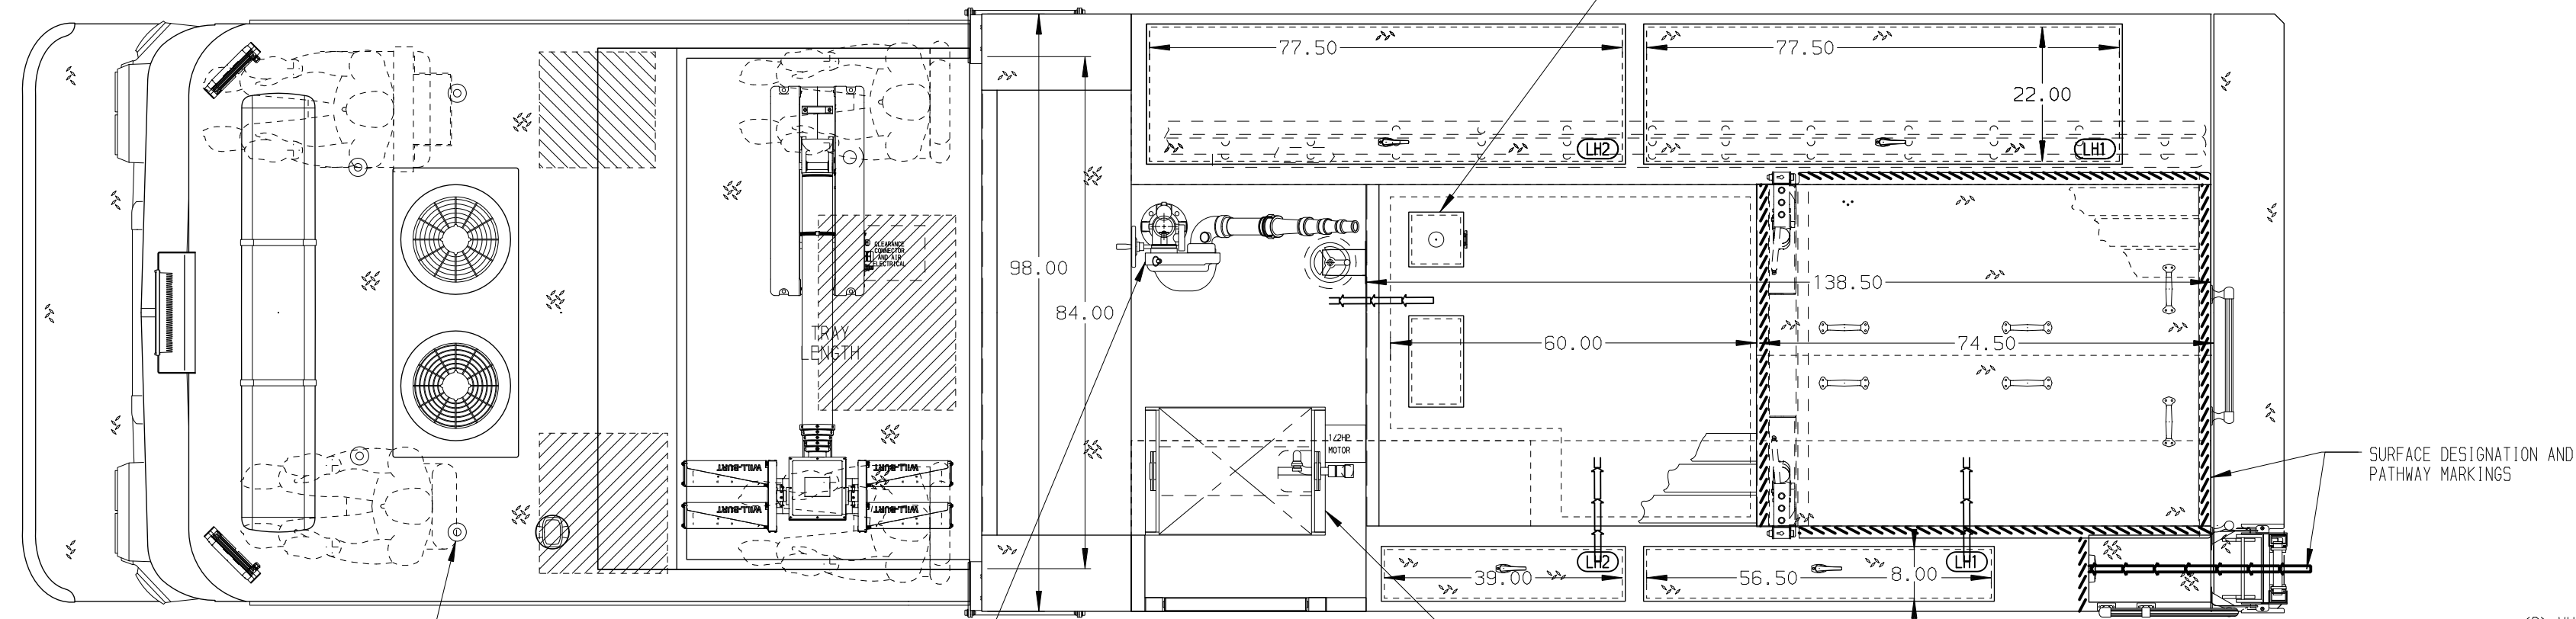


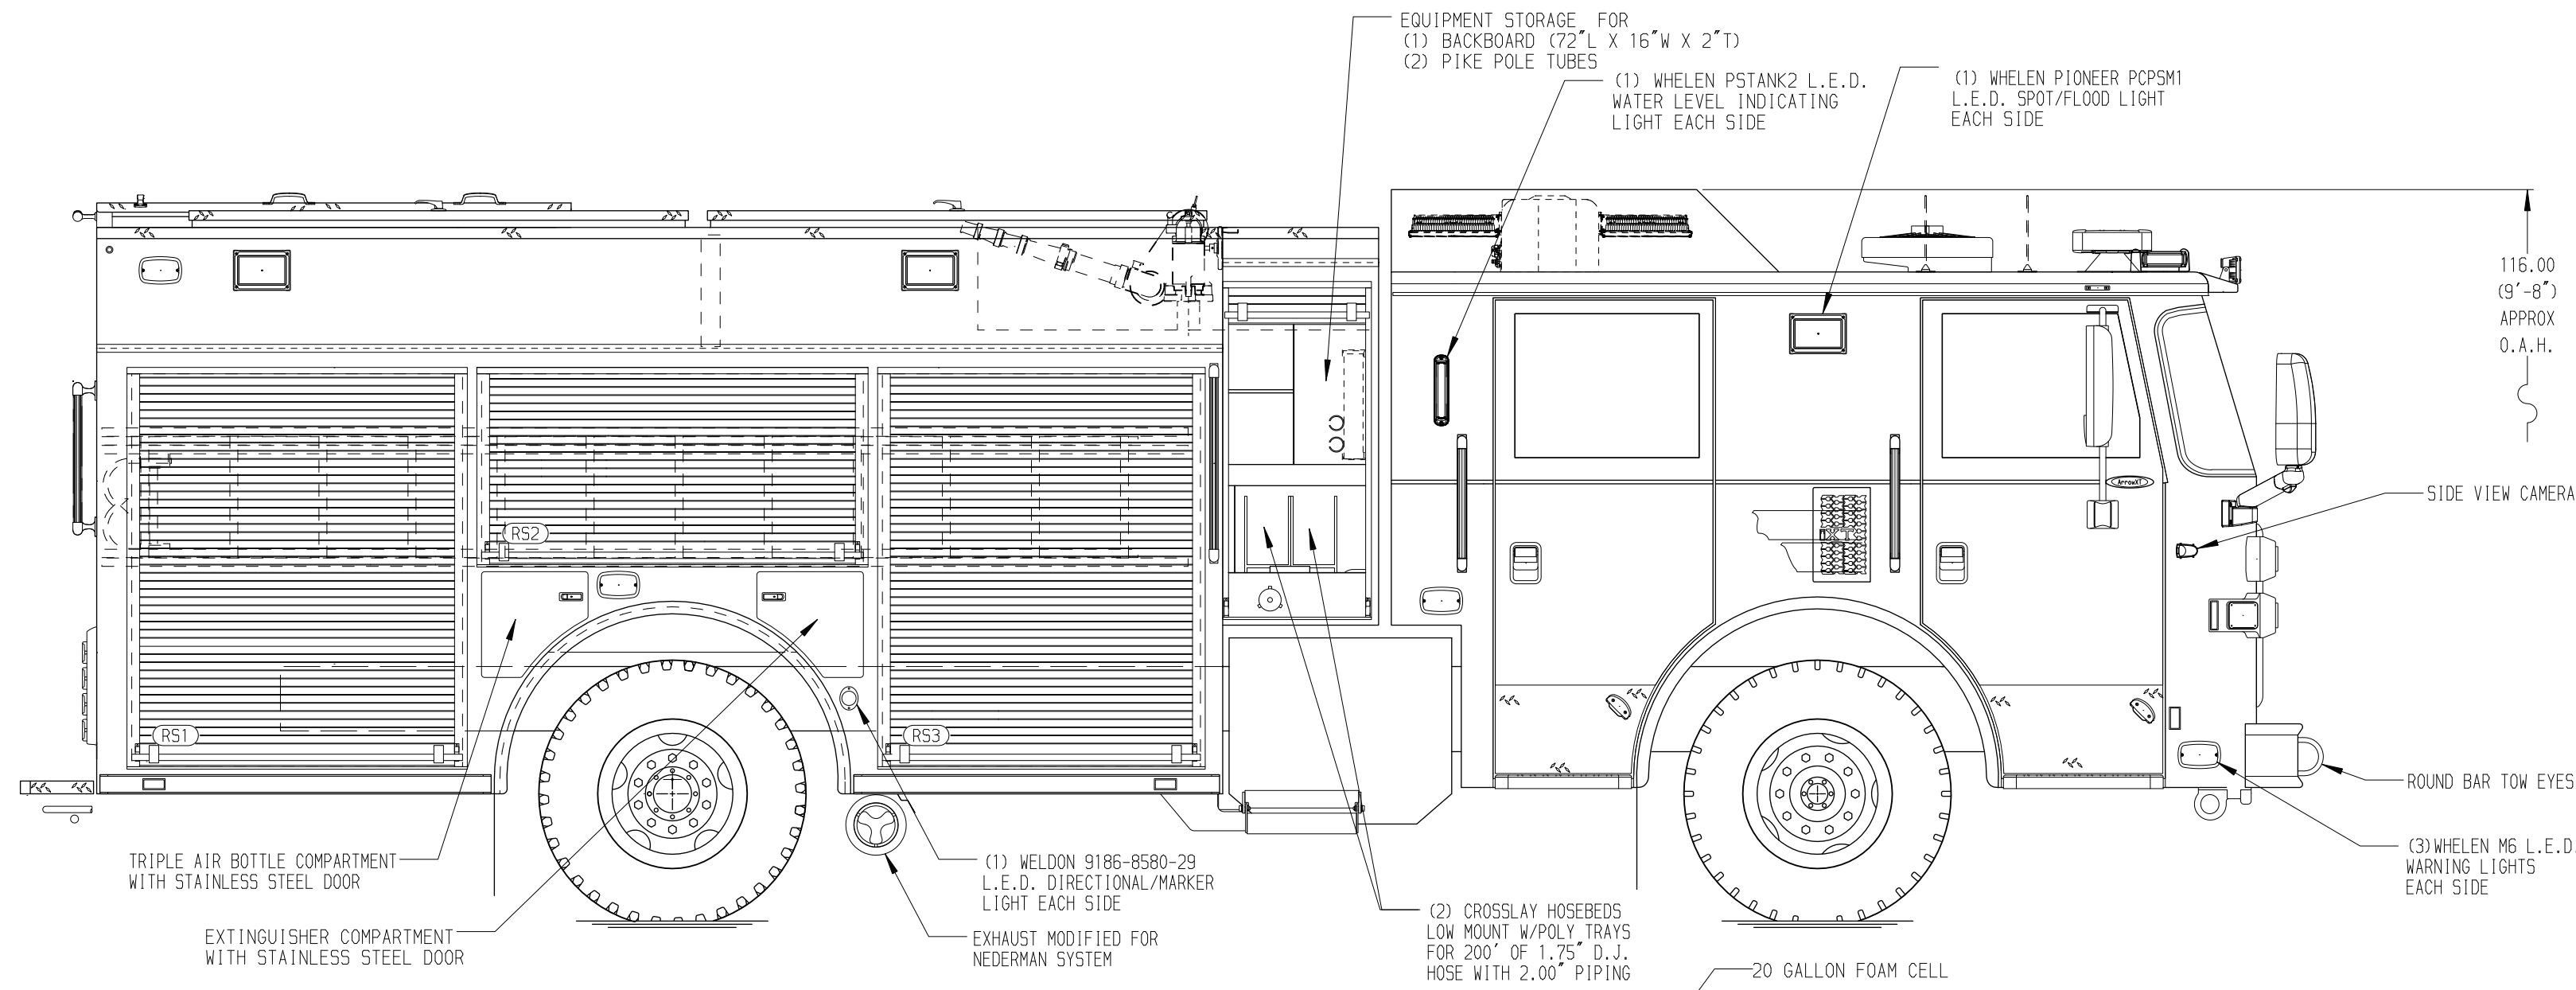

- HOSEBED CAPACITIES
- ① - 150' OF 1.75" HOSE
 - ② - 150' OF 1.75" HOSE
 - ③ - 200' OF 2.50" HOSE
 - ④ - 600' OF 2.50" HOSE
 - ⑤ - 1000' OF 4.00" HOSE

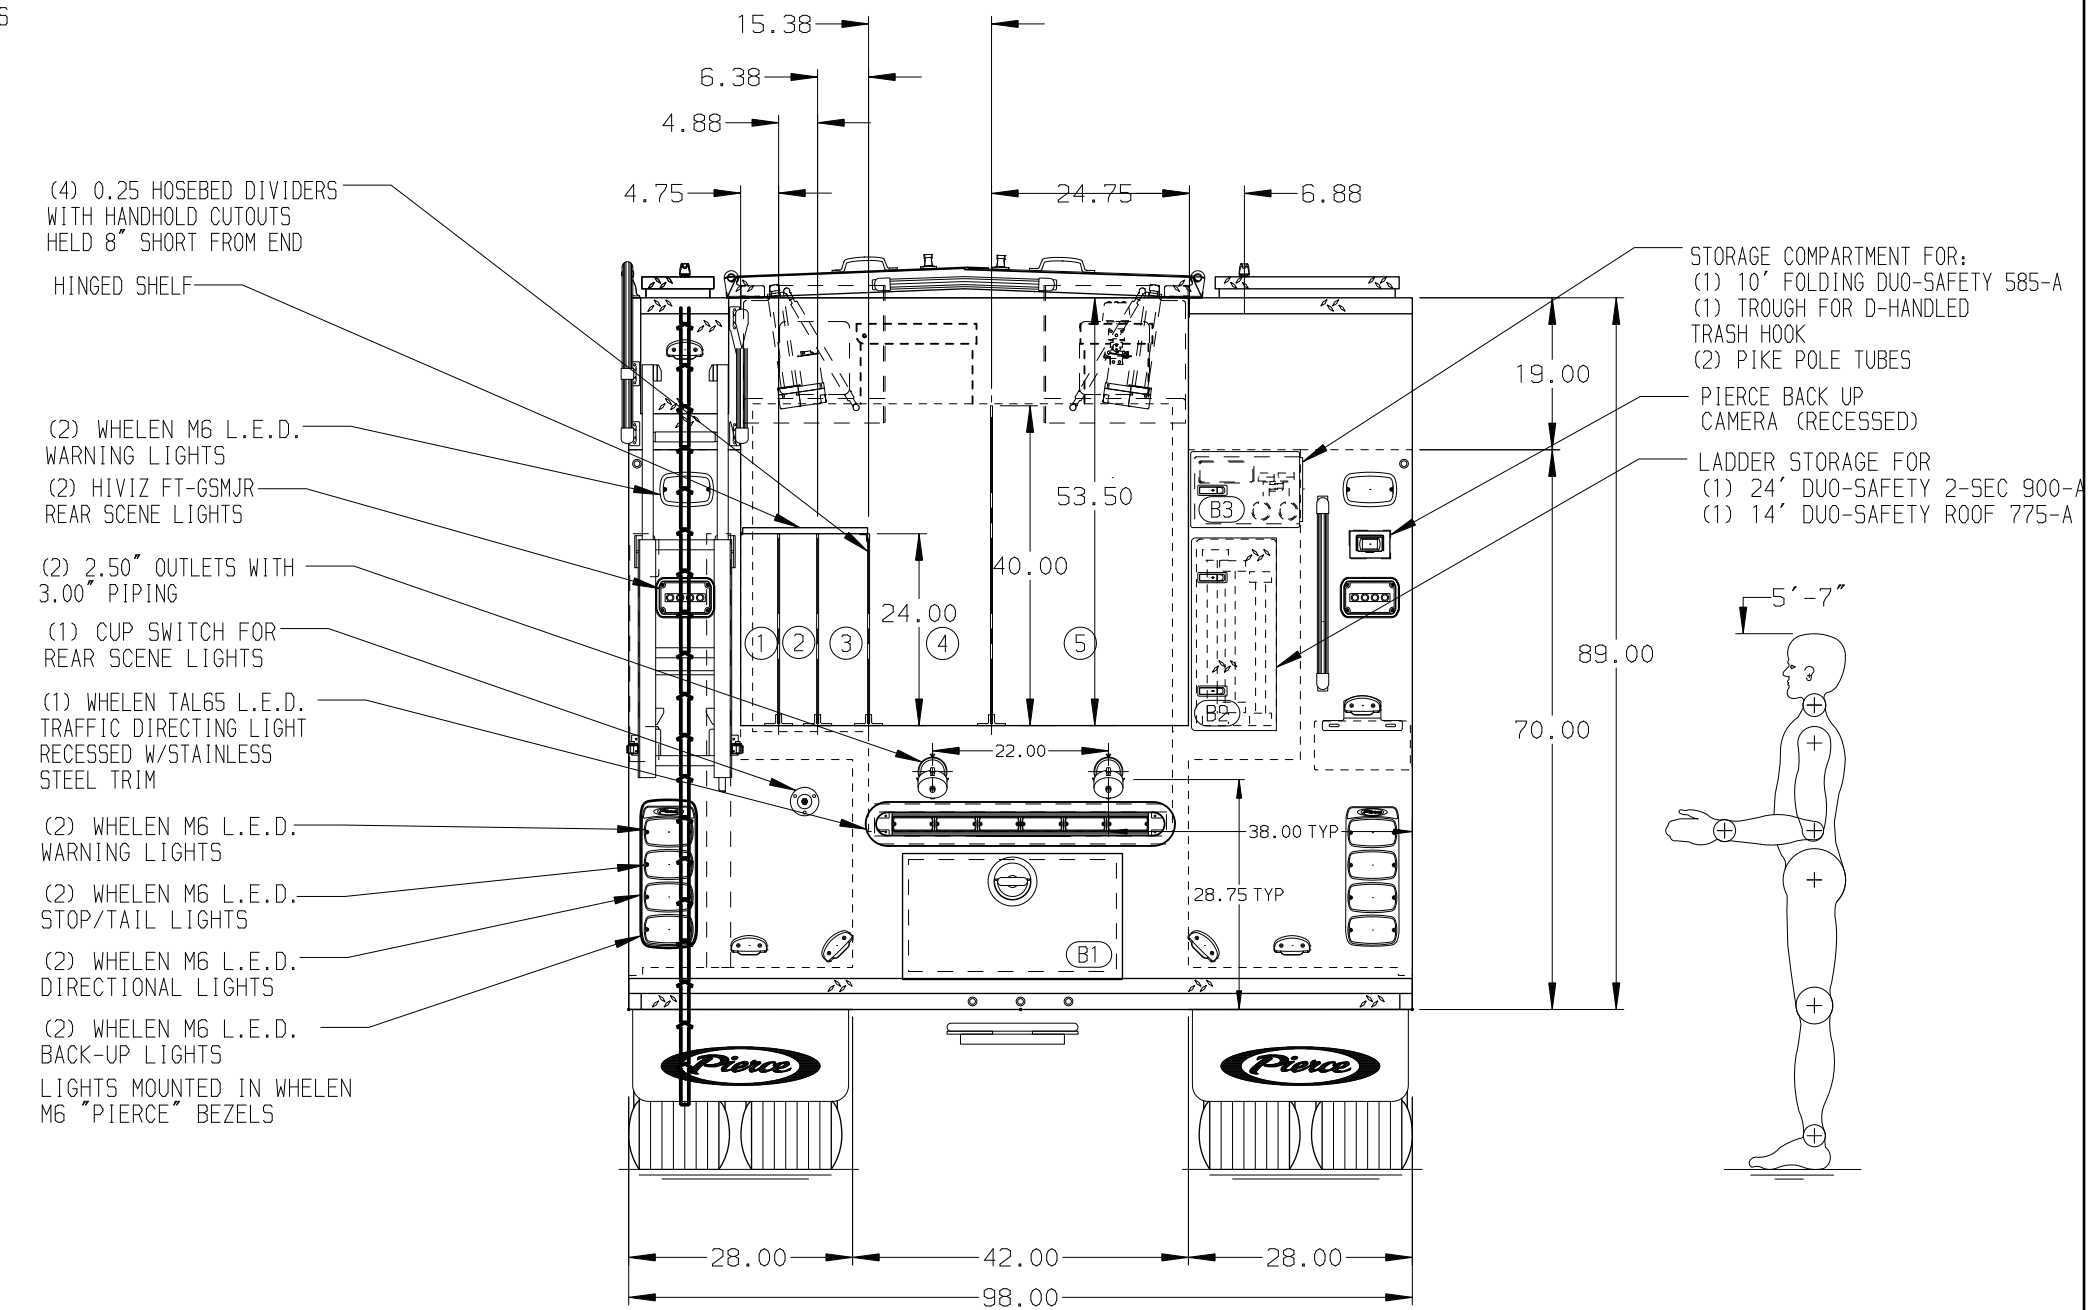

ALUMINUM BODY MAX O.A.L. 374.00" MAX O.A.H. 119.50" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING LOCATED ON DS SEAT RISER
2. AIR OUTLET WITH SHUT OFF VALVE WITH MILTON "D" FITTINGS ON DS PUMP PANEL
3. FOAMPRO 2001 FOAM SYSTEM

CUSTOMER APPROVAL					 MANUFACTURING INC.		JOB NO.	37974		
APPROVED BY: _____							SCALE	1:24		
DATE: _____					 MANUFACTURING INC.		DATE			
				CHASSIS DATA			TITLE	1500-D-500P, 480 WATER W/20 FOAM, 177" PUC	DRAWN BY	LME
								(2) CROSSLAYS, DELUGE, REEL, LADDERS BTWN TANK & SS		15NOV22
				MAKE			FOR	CENTRAL KITSAP FIRE AND RESCUE	CHECKED BY	-
				PIERCE				SILVERDALE, WASHINGTON		
	-	-	CZA	MODEL	DWG	37974AD-SH1			SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	ARROW XT	NO.				D	1 OF 2