
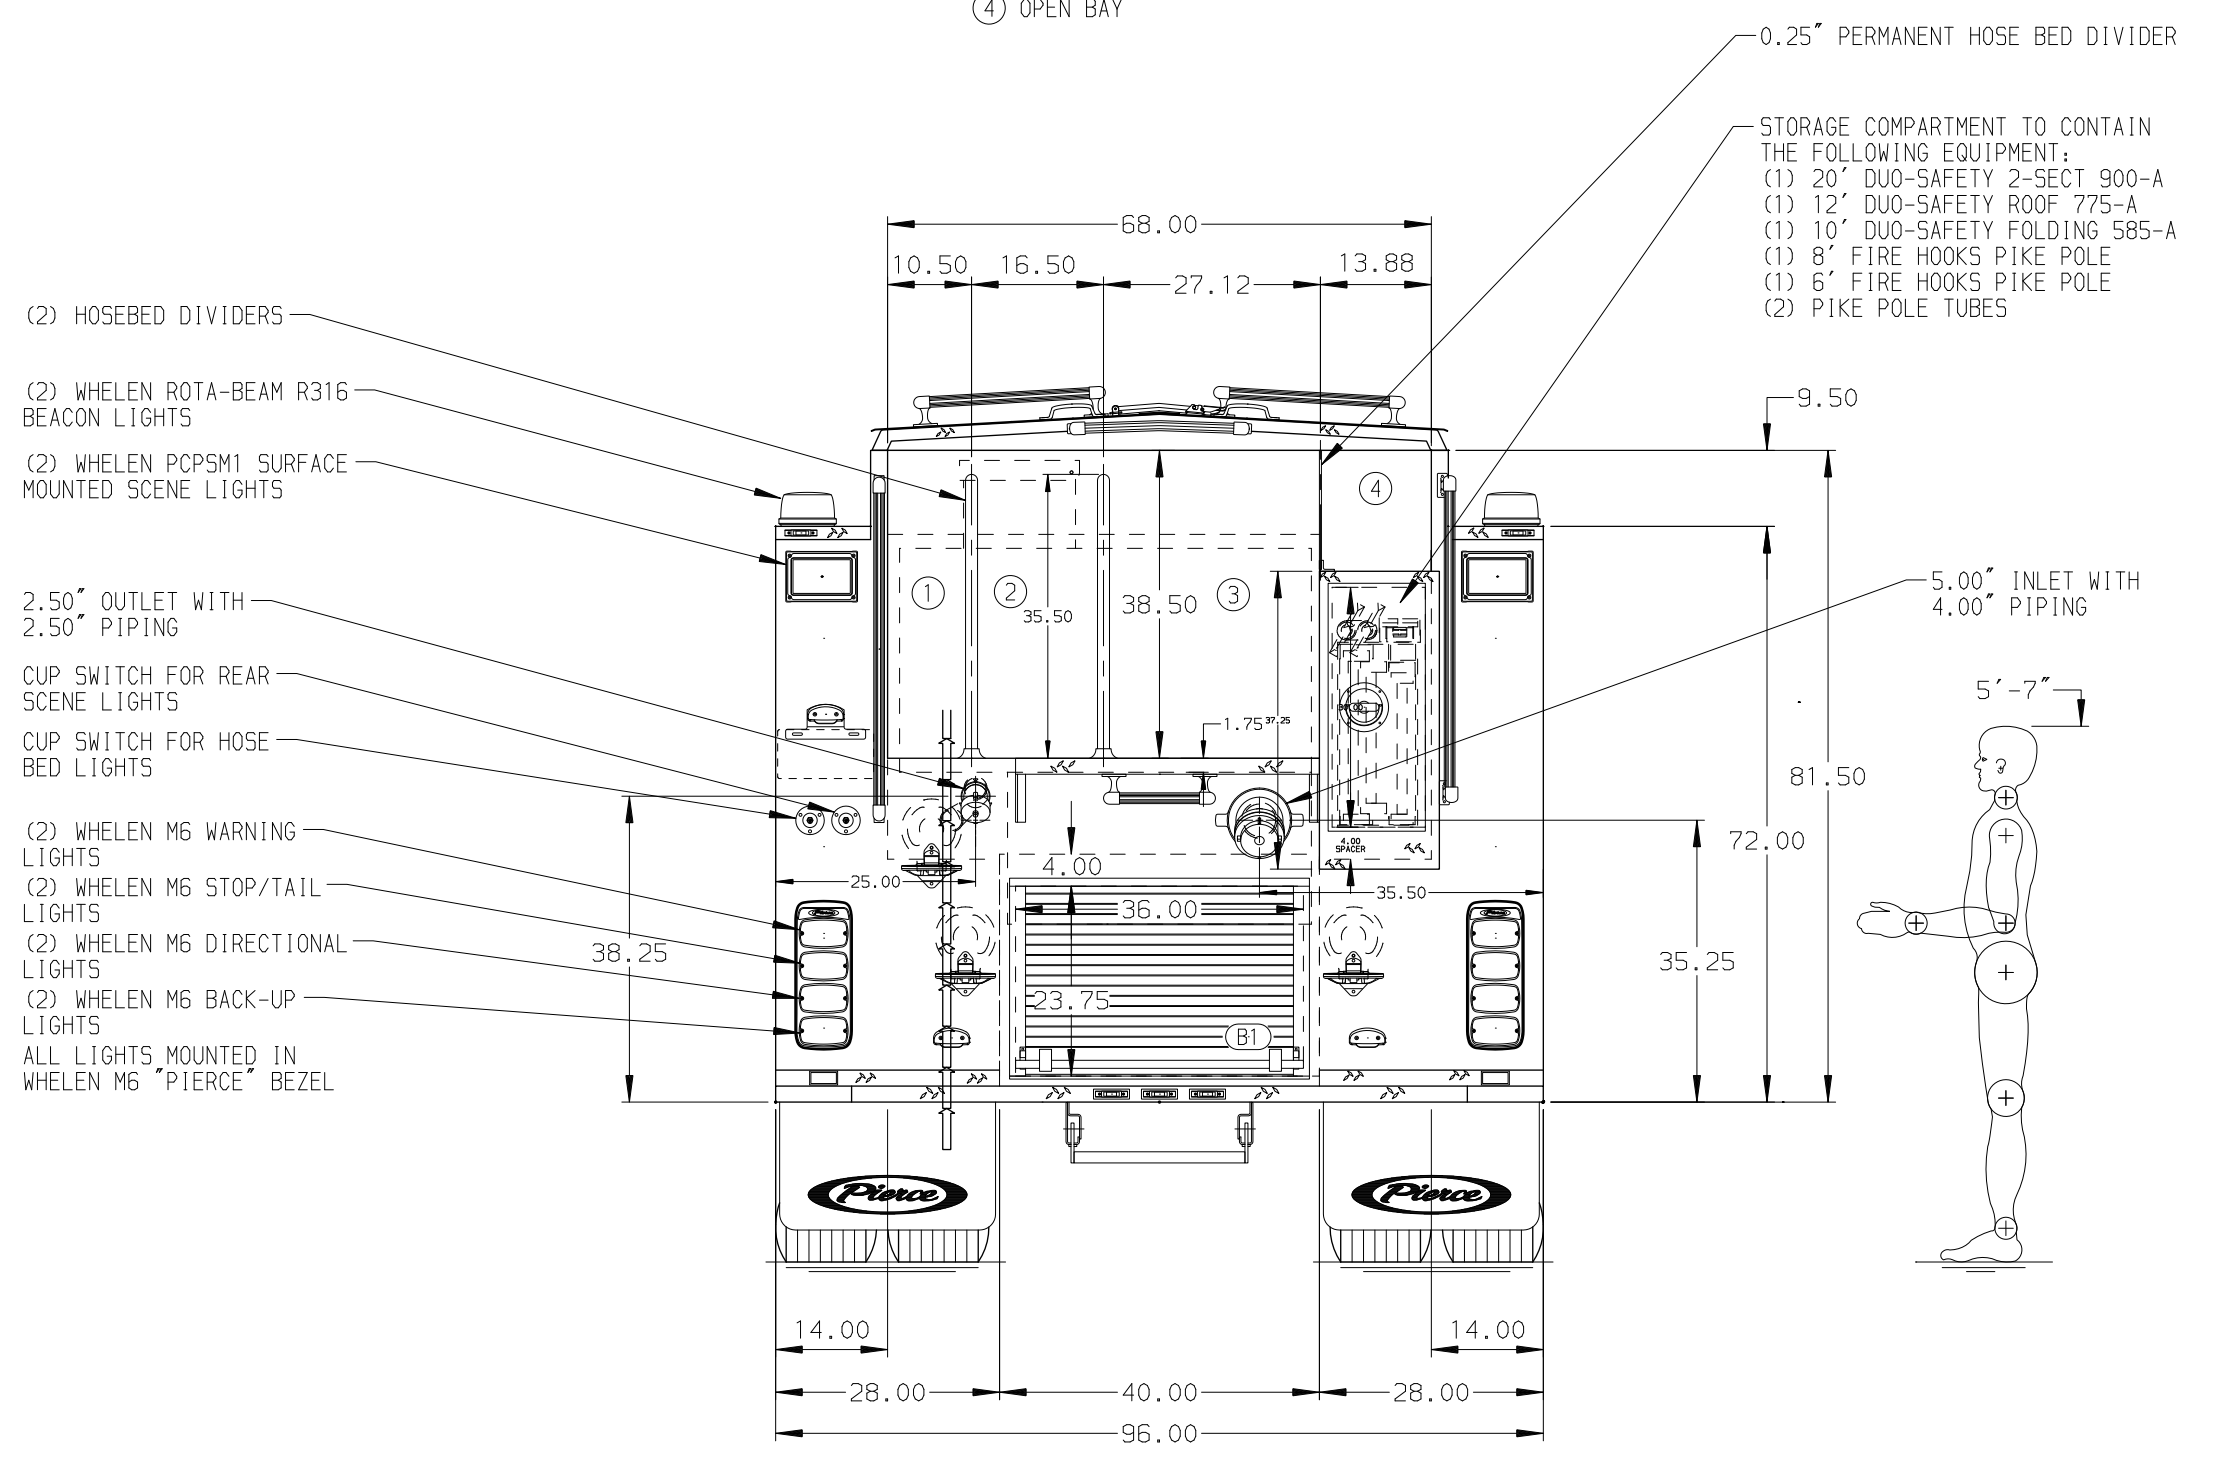


- HOSEBED CAPACITIES
- ① 500' OF 2.50" D.J. POLY HOSE
  - ② 850' OF 2.50" D.J. POLY HOSE
  - ③ 1000' OF 4.00" D.J. POLY HOSE
  - ④ OPEN BAY

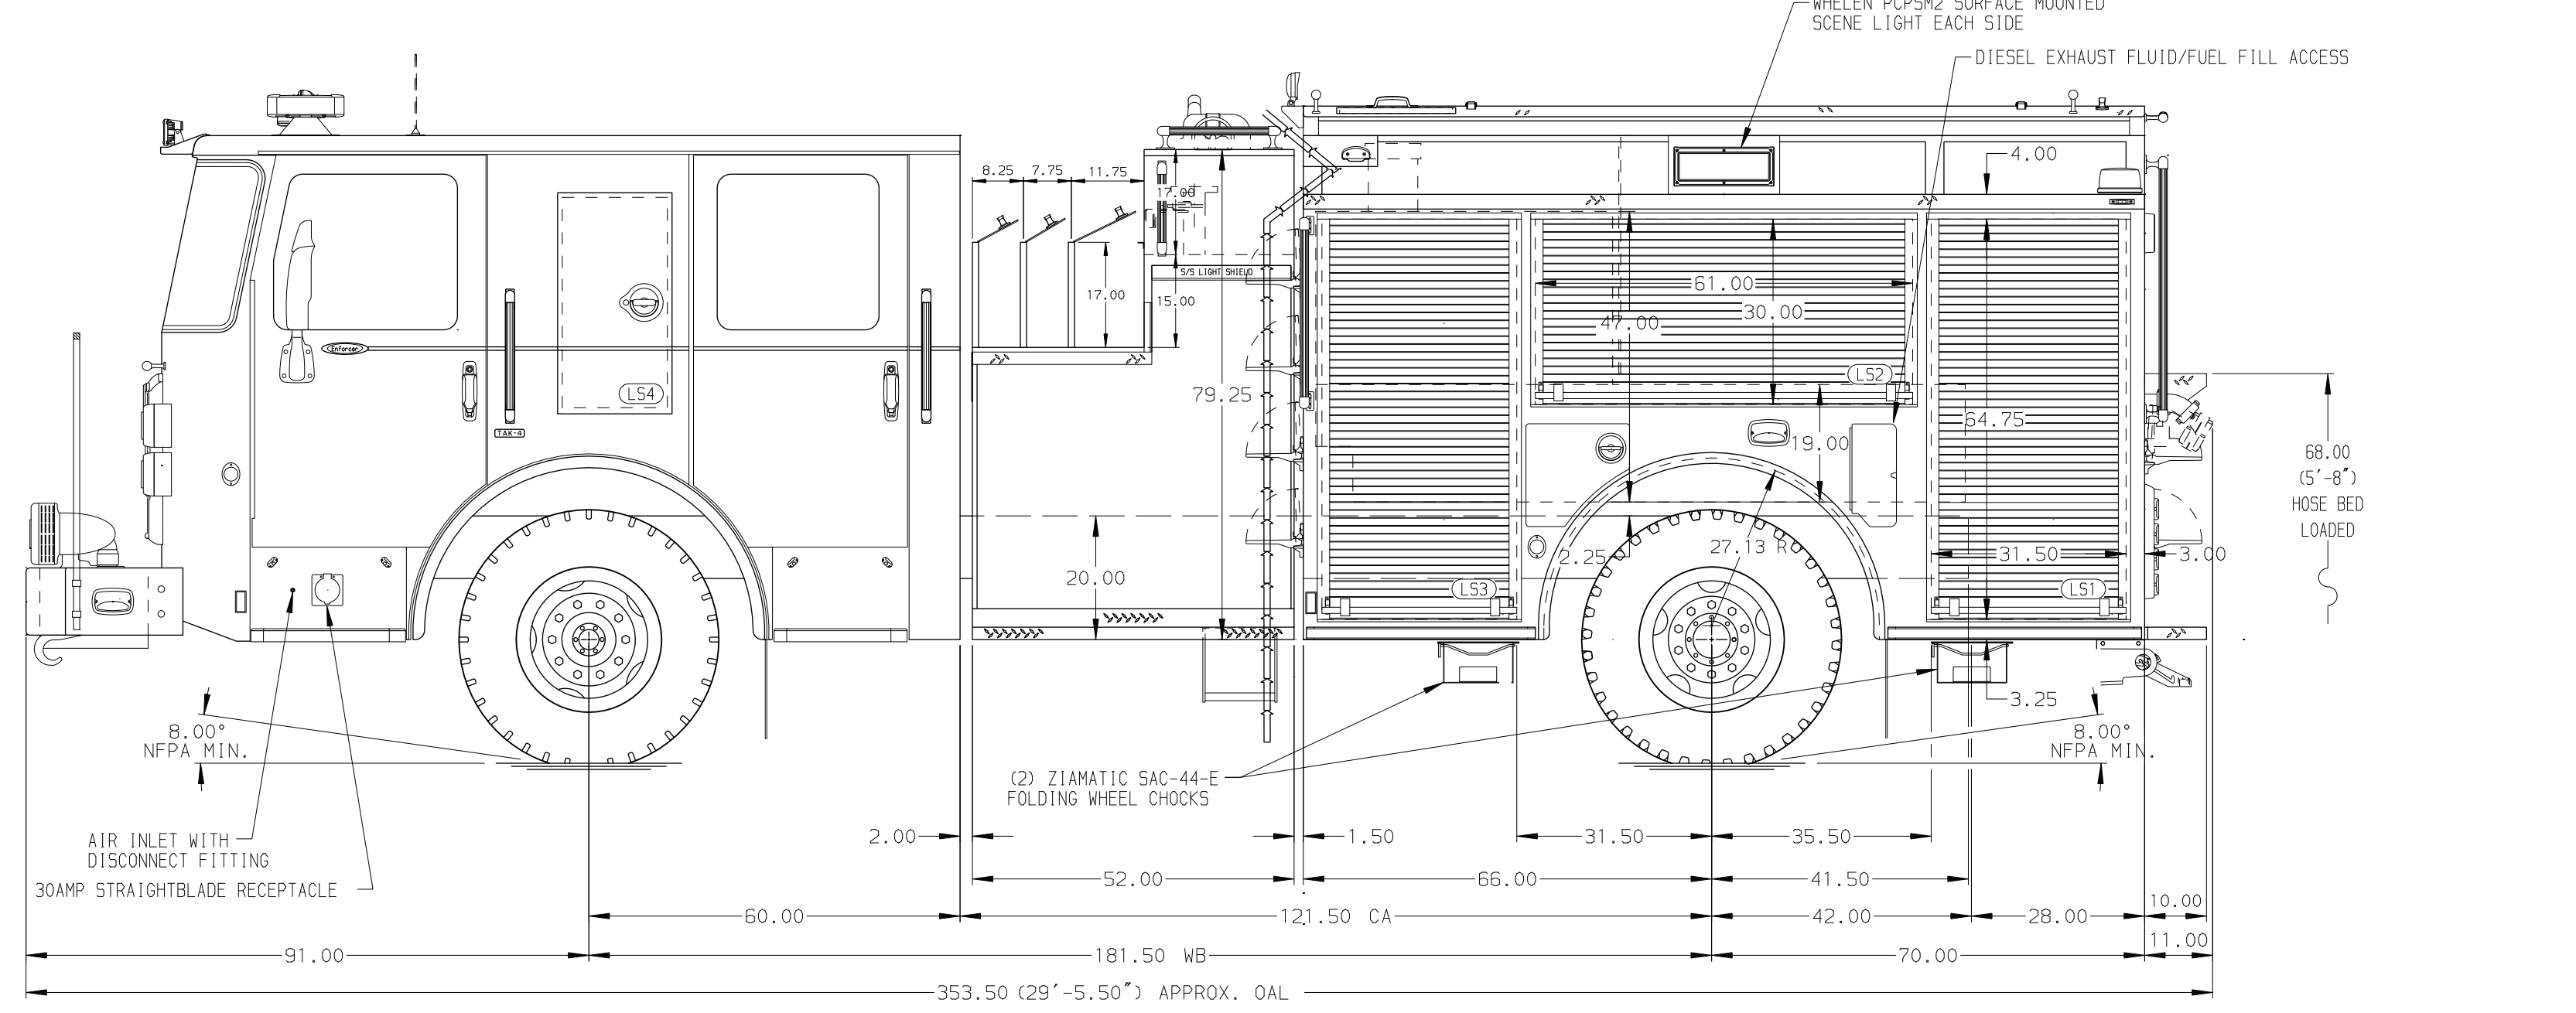

STAINLESS STEEL BODY    MAXIMUM O.A.H. 116.00"    FRONTAL IMPACT PROTECTION

- NOTE
1. OSHKOSH TAK-4 T3 REAR STEER
  2. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON PUMP PANEL PER ORDER
  3. BATTERY CHARGER LOCATED PER ORDER
  4. SUB FEED BREAKER BOX LOCATED PER ORDER
  5. FIVE FULL WIDTH/DEPTH ADJUSTABLE SHELVES WITH SIDES LOCATED PER ORDER
  6. ONE ADJUSTABLE SLIDE-OUT TRAY WITH SIDES LOCATED PER ORDER
  7. FOUR PAC TRAC EQUIPMENT MOUNTING SYSTEMS ON THE REAR WALL LOCATED PER ORDER
  8. VERTICAL PARTITION HOSE STORAGE SLOTS LOCATED PER ORDER
  9. THREE HORIZONTAL EQUIPMENT MOUNTING TRACKS LOCATED PER ORDER
  10. FOUR ZIAMATIC AIR BOTTLE BRACKETS LOCATED PER ORDER

REV	DATE	BY	CH	ENFORCER
13MAR24	BST	JLL		CHASSIS DATA
15FEB24	BST	JLL		MAKE
11SEP23	BST	JLL		PIERCE
17AUG23	KWH	JLL		MODEL
22JUN23	BST	JLL		

		JOB NO.	38010-01-02
		SCALE	1:24
TITLE	1250-D-500P, 136" PUMPER BODY, FH, 52" SIDE CONTROL LADDERS BETWEEN TANK AND BODY, DELUGE	DRAWN BY	BST
FOR	CAMBRIDGE FIRE DEPARTMENT CAMBRIDGE, MA	CHECKED BY	PHA
DWG NO.	38010AD	SHEET SIZE	D
		SHEET NO.	1 OF 1