

PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM

18,000 Lb Dana Axle

AXLE, REAR

27,000 Lb Meritor Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

19" Extended Painted Steel

CAB

6000 Enforcer Cab

BODY

WATER TANK

750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

152" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

152" Lap Low FDLER

FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Hale QMAX

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

(1) 2.50" Standard Capacity

SPEEDLAYS

SpeedLays Not Required

GENERATOR


Generator Not Required

Foam System


Foam System Not Required

Foam Cell

Foam Cell Not Required

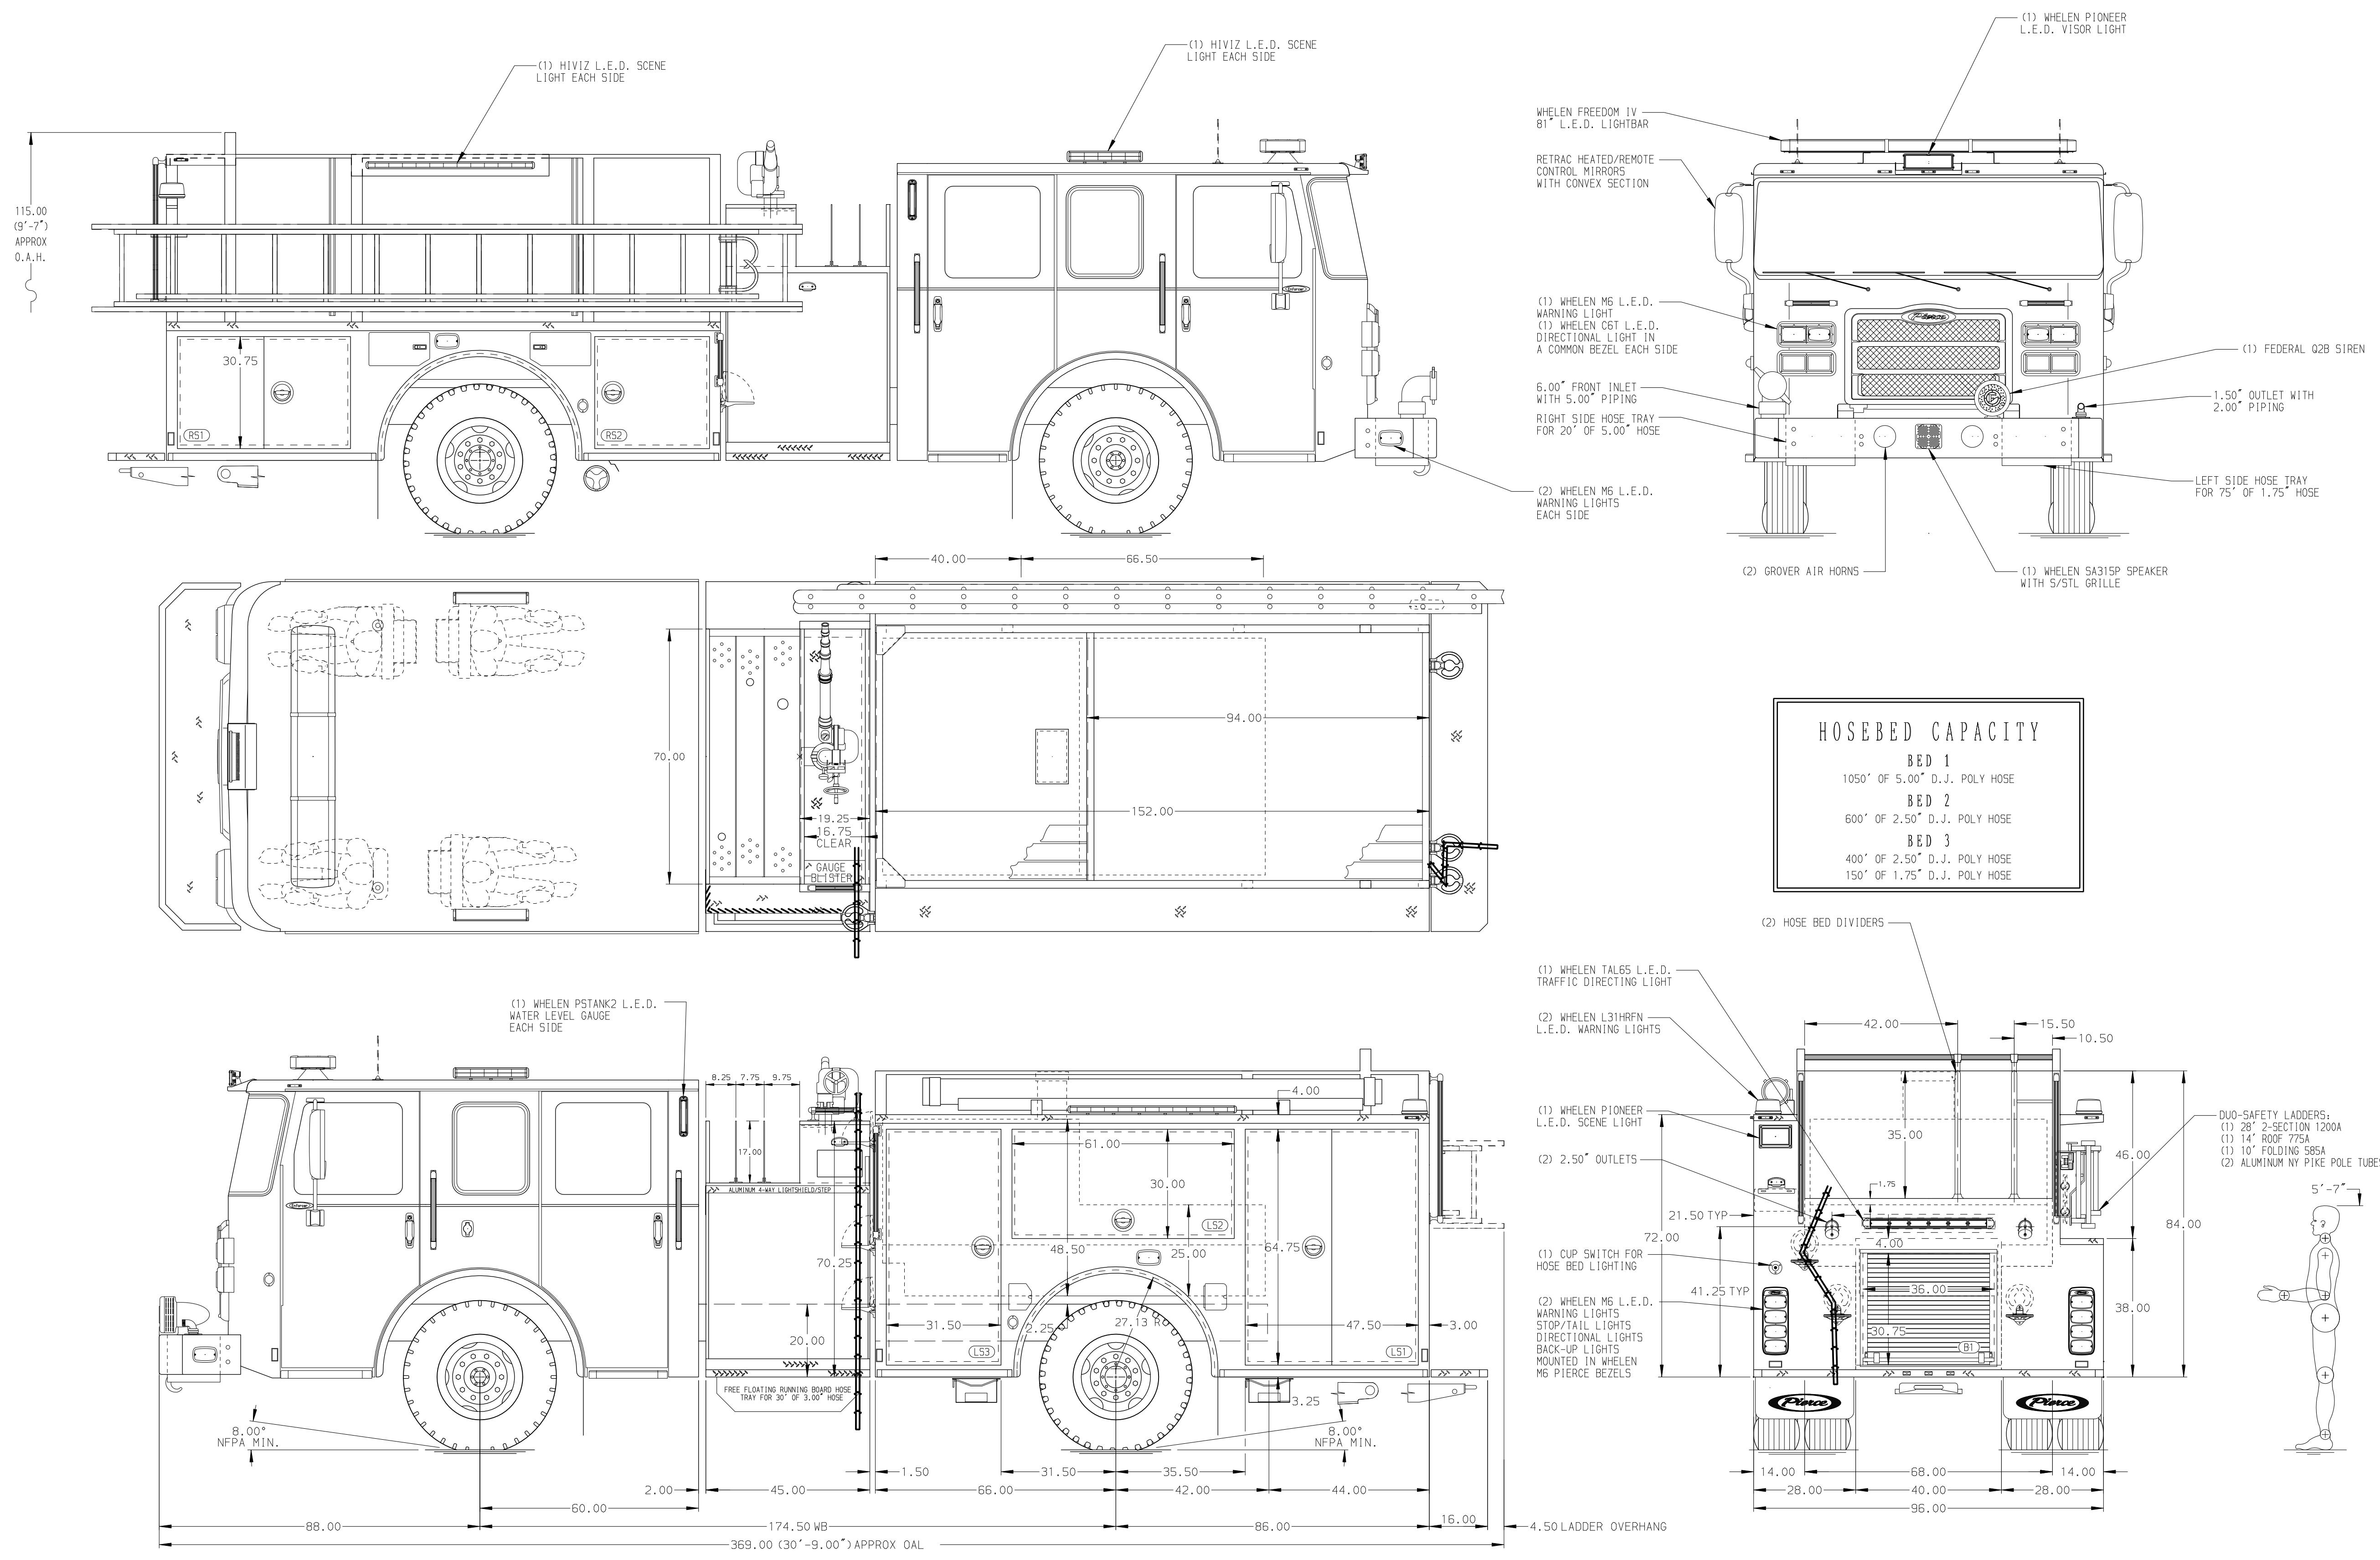

HOSEBED CAPACITY	
BED 1	1050' OF 5.00" D.J. POLY HOSE
BED 2	600' OF 2.50" D.J. POLY HOSE
BED 3	400' OF 2.50" D.J. POLY HOSE
	150' OF 1.75" D.J. POLY HOSE

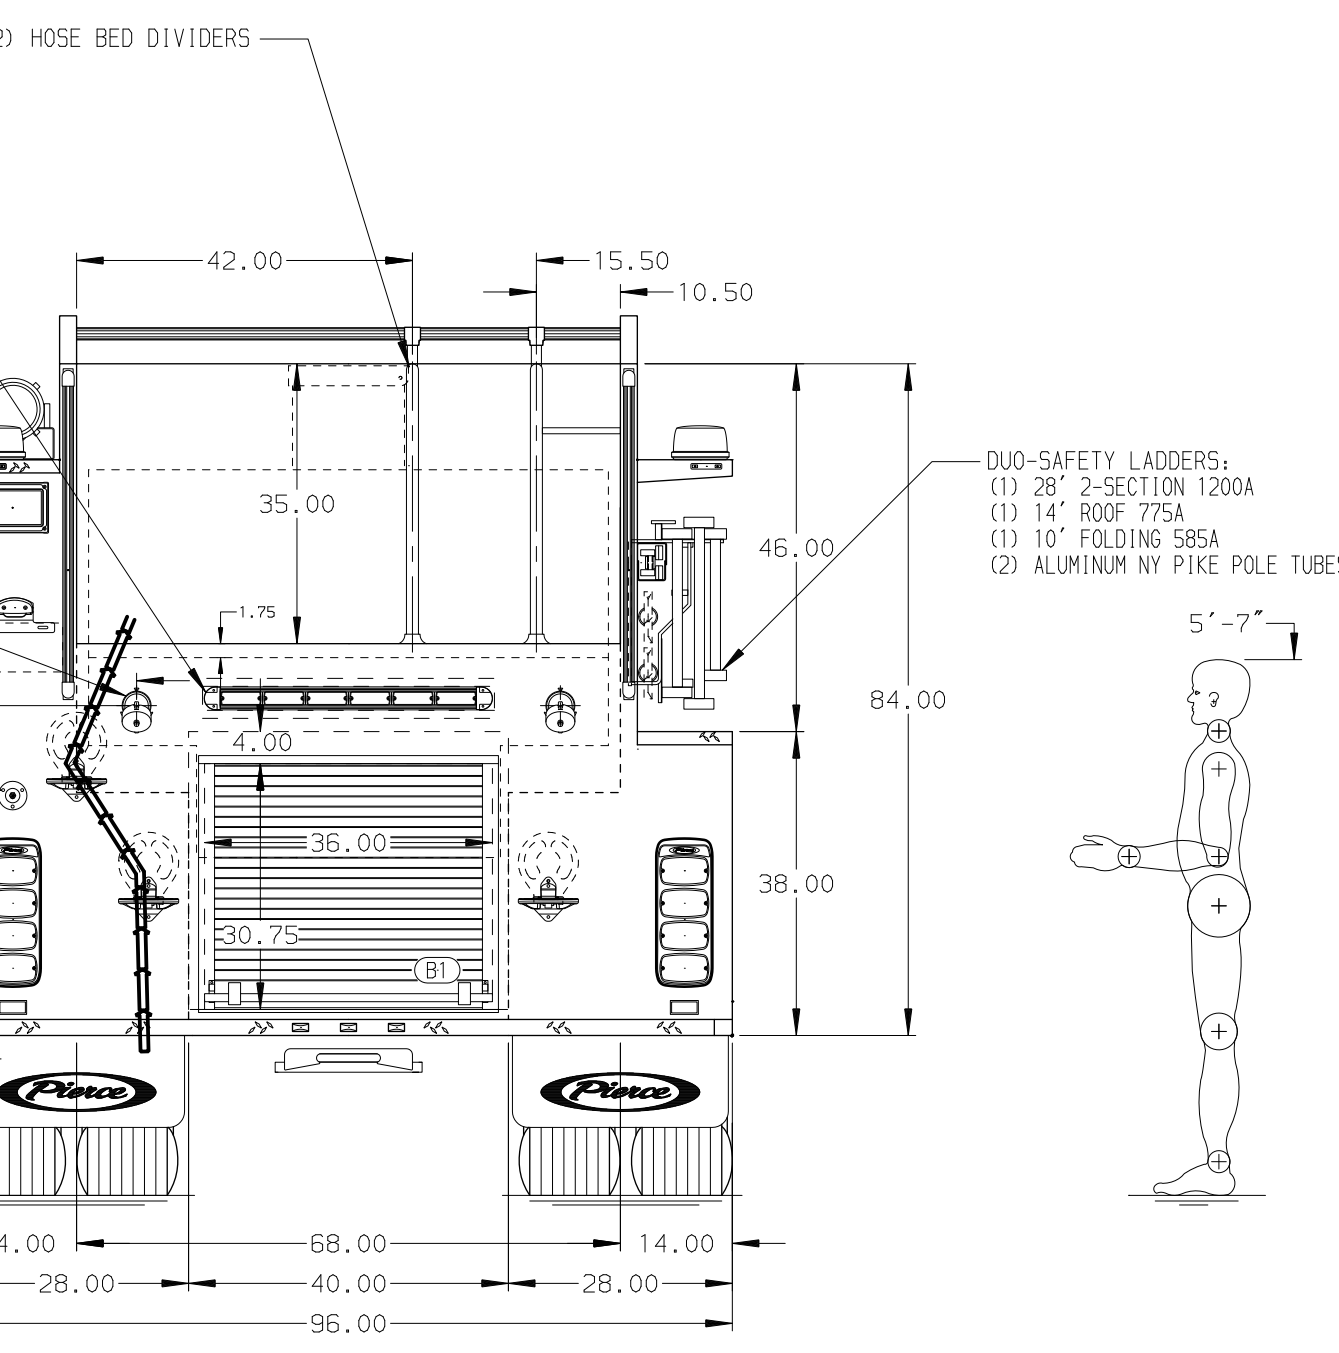

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- 2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- 3. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
- 4. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- 5. FIVE ADJUSTABLE SHELVES LOCATED PER ORDER
- 6. THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
- 7. ALUMINUM FLOORBOARD LOCATED PER ORDER
- 8. FOUR 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
REV	DATE	BY	CH

MANUFACTURING INC.		JOB NO.	38295
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	MMF
MAKE		CHECKED BY	COL
FOR	East Joliet Fire Protection District	SHEET SIZE	SHEET NO.
MODEL			1 OF 1
DWG NO.	38295AD		