


HOSEBED CAPACITIES

- ① 900' OF 2.50" HOSE
- ② 700' OF 4.00" HOSE
- ③ 900' OF 2.50" HOSE

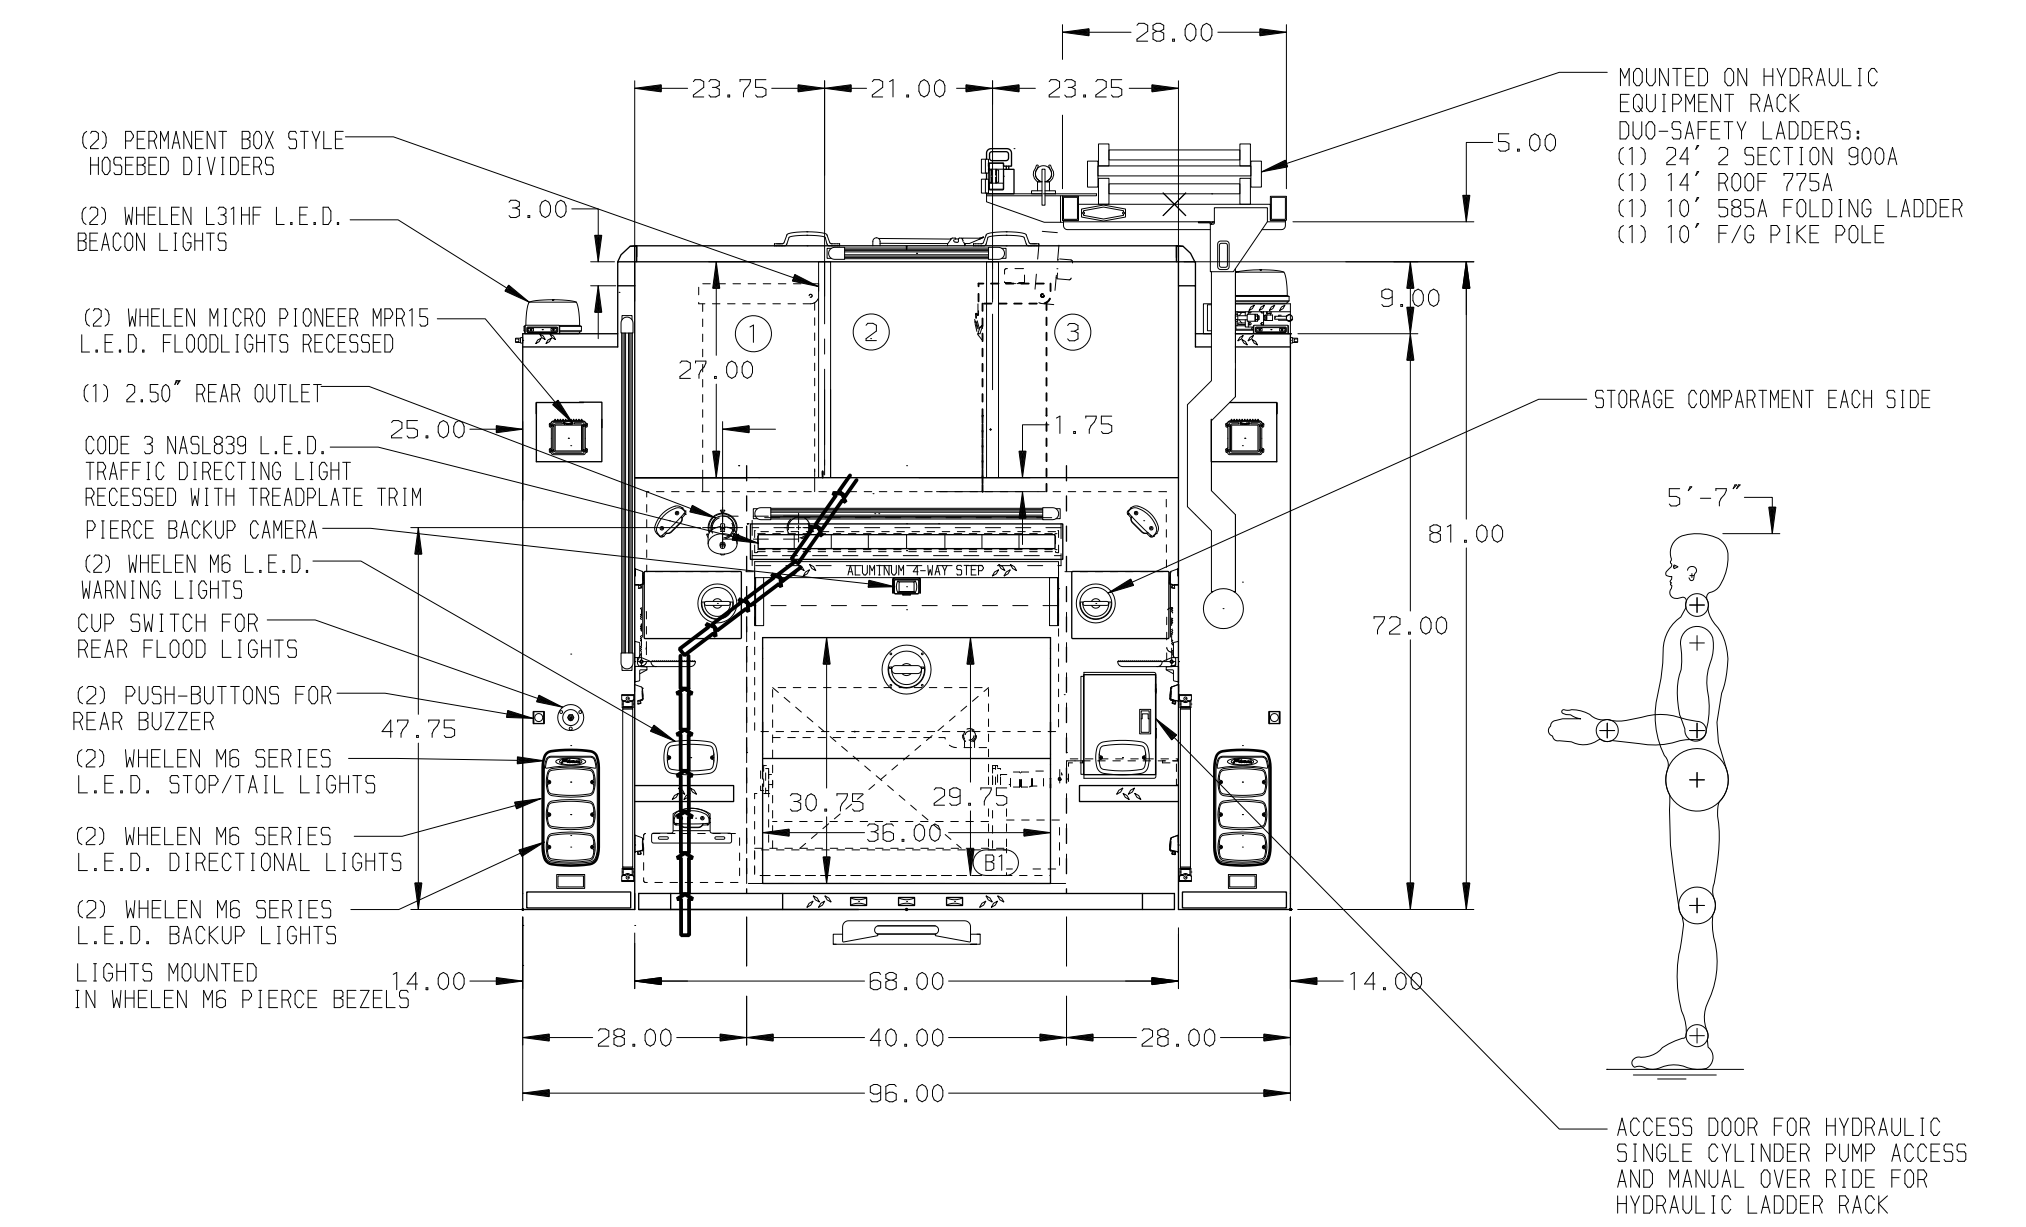

GALVANNEAL

NOTE:  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.  
MINOR DETAILS NOT SHOWN.

- BRUSHED S/S SCUFFPLATES ON INTERIOR OF CAB DOORS
- BRUSHED S/S SCUFFPLATE ON CAB DOOR JAMBS
- BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- BATTERY CHARGER LOCATED IN THE CREW CAB SEAT RISER
- ERNST SIGHT TUBE ON THE DRIVER'S SIDE FRONT BULKHEAD TO MATCH 32951
- AIR OUTLET WITH SHUT OFF VALVE ON THE LEFT SIDE PUMP PANEL

REV	DATE	BY	CH	ARROW	XT
08MAY24	LST	BSE			CHASSIS DATA
03APR24	LST	BSE			MAKE
29FEB24	LST	BSE			PIERCE
16FEB24	LST	BSE			MODEL
26JAN24	LST	BSE			

	<b>MANUFACTURING INC.</b>		JOB NO.	38312
			SCALE	1:24
		TITLE	1500-D-500P, 25 GAL FOAM CELL, 152" MEDIUM BODY	
		FOR	(2) X-LAYS, HYD LADDER RACK, FRONT INLET, HOSE REEL	
		DWG NO.	38312AD-SH1	
		CHECKED BY	BSE	28SEP23
		SHEET SIZE	D	1 of 2
		DRAWN BY	LST	28SEP23
		SHEET NO.		1 of 2