

**PUMPER
BODY**

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

**CHASSIS
AXLE, FRONT, CUSTOM**

16,000 Lb Dana Axle

AXLE, REAR

24,000 Lb Meritor Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

10" Extended Stainless Steel

CAB

7010 Enforcer Cab

**BODY
WATER TANK**

500 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

152" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

152" Lap Full Height Front & Rear FDLER

**FIRE SUPPRESSION
PUMPHOUSE**

48" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

DEADLAYS, 1.50"

(2) 1.50" Special Capacity

SPEEDLAYS

SpeedLays Not Required

GENERATOR

Generator Not Required

Foam System

Husky 3 Single Agent Foam System


Foam Cell

20 Gallon Foam Cell, Reduced Water

MAXIMUM O.A.H. 120.00"

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHOULDER STRAIGHT BLADE RECEPTACLE AND INDICATOR LIGHT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- ELEVEN ADJUSTABLE SHELVES LOCATED PER ORDER
- ONE SWING-OUT TOOLBOARD LOCATED PER ORDER

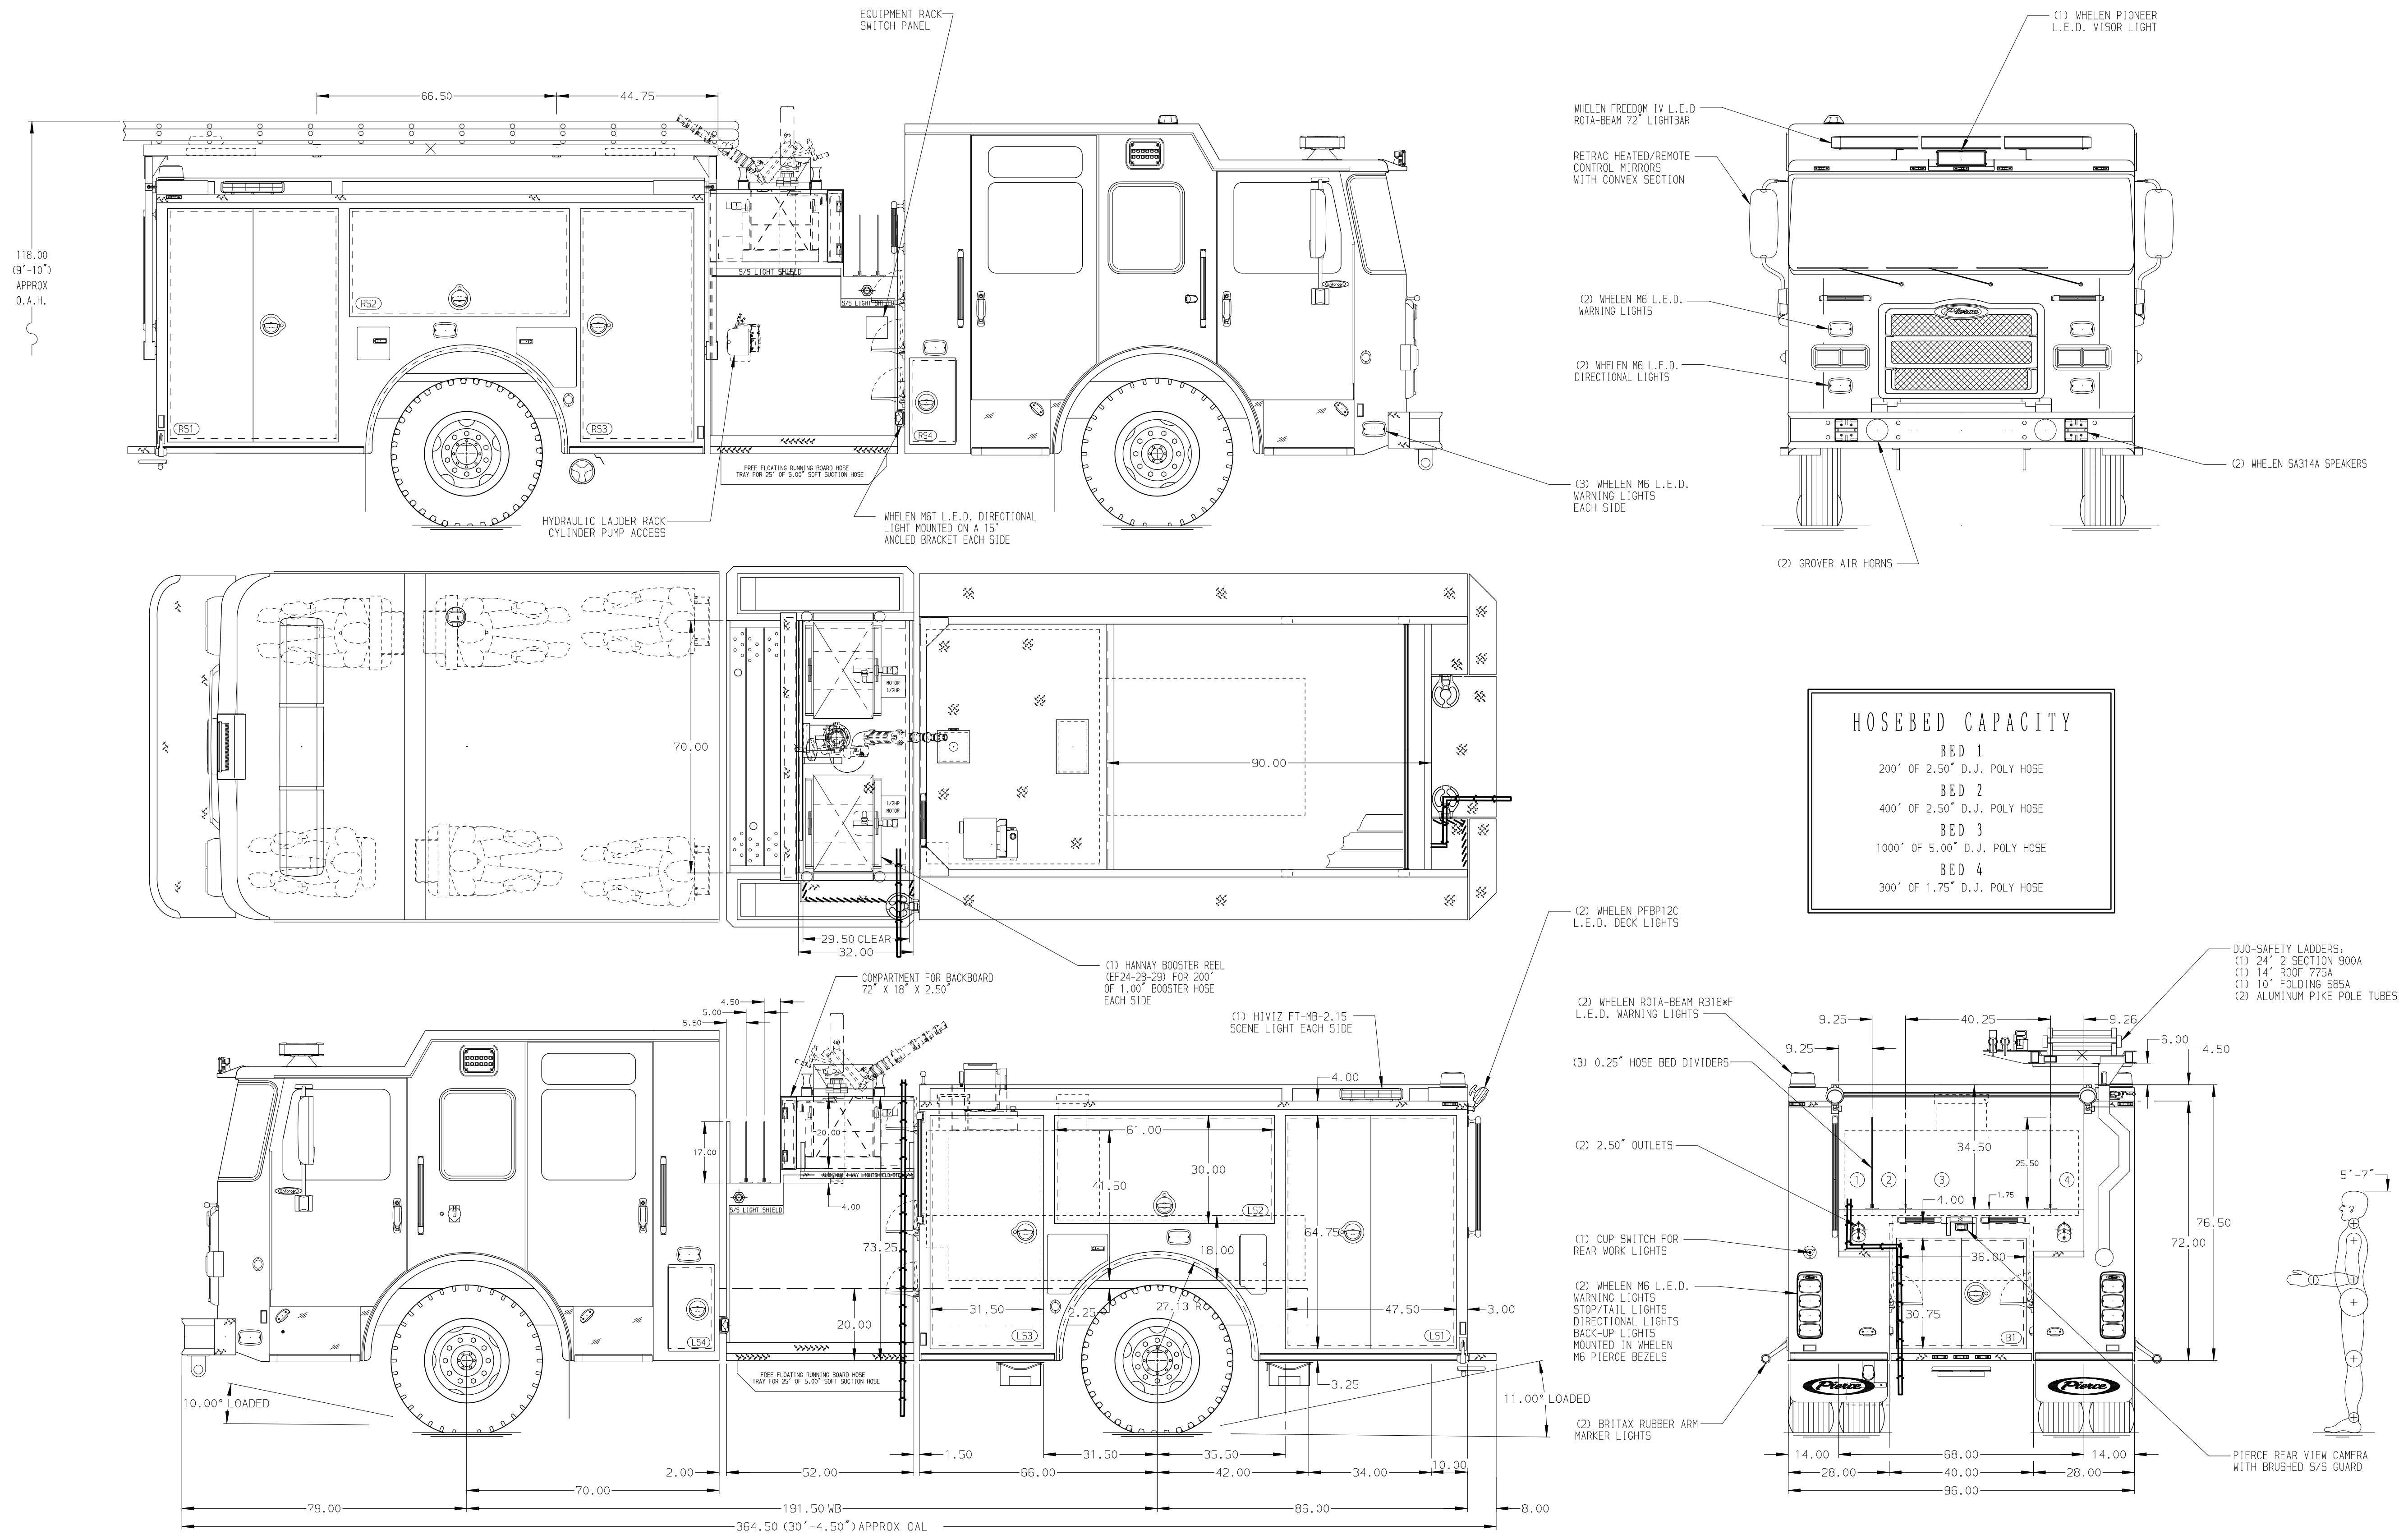

HOSEBED CAPACITY	
BED 1	200' OF 2.50" D.J. POLY HOSE
BED 2	400' OF 2.50" D.J. POLY HOSE
BED 3	1000' OF 5.00" D.J. POLY HOSE
BED 4	300' OF 1.75" D.J. POLY HOSE

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
REV	DATE	BY	CH

Pierce MANUFACTURING INC.		JOB NO.	38547
TITLE	Pierce Pumper Approval Drawing	SCALE	1:24
DATE		DATE	
FOR	Salem Fire Department	DRAWN BY	MMF
MODEL		CHECKED BY	COL
ENFORCER		SHEET SIZE	D
		SHEET NO.	1 OF 1

38547AD