

PUMPER BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM
18,000 Lb Oshkosh Tak-4 Axle

AXLE, REAR
24,000 Lb Meritor Axle

ENGINE
450 HP Cummins L9

TRANSMISSION
Allison 5th Gen, 4500 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY WATER TANK
750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR
30.75" FF RollUp Rear Compt

COMPT, PUMPER, DRIVER SIDE
152" RollUp Full Height Front & Rear FDLR

COMPT, PUMPER PASS. SIDE
152" RollUp Full Height Front & Rear FDLR

FIRE SUPPRESSION PUMPHOUSE
48" Control Zone Side Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity

SPEEDLAYS
SpeedLays Not Required

GENERATOR
Generator Not Required


Foam System
Piping For Future Husky 3/12 Foam System

Foam Cell
20 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHOULDER RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CREW CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGER INDICATOR LOCATED DRIVER SIDE STEP WELL
- FOUR ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
- TWO 120V RECEPTACLES LOCATED PER SHOP ORDER
- TWO FLOOR MOUNTED TRAYS LOCATED IN COMPARTMENT PER SHOP ORDER
- PLUMBING FOR FUTURE HUSKY 3/12 SYSTEM

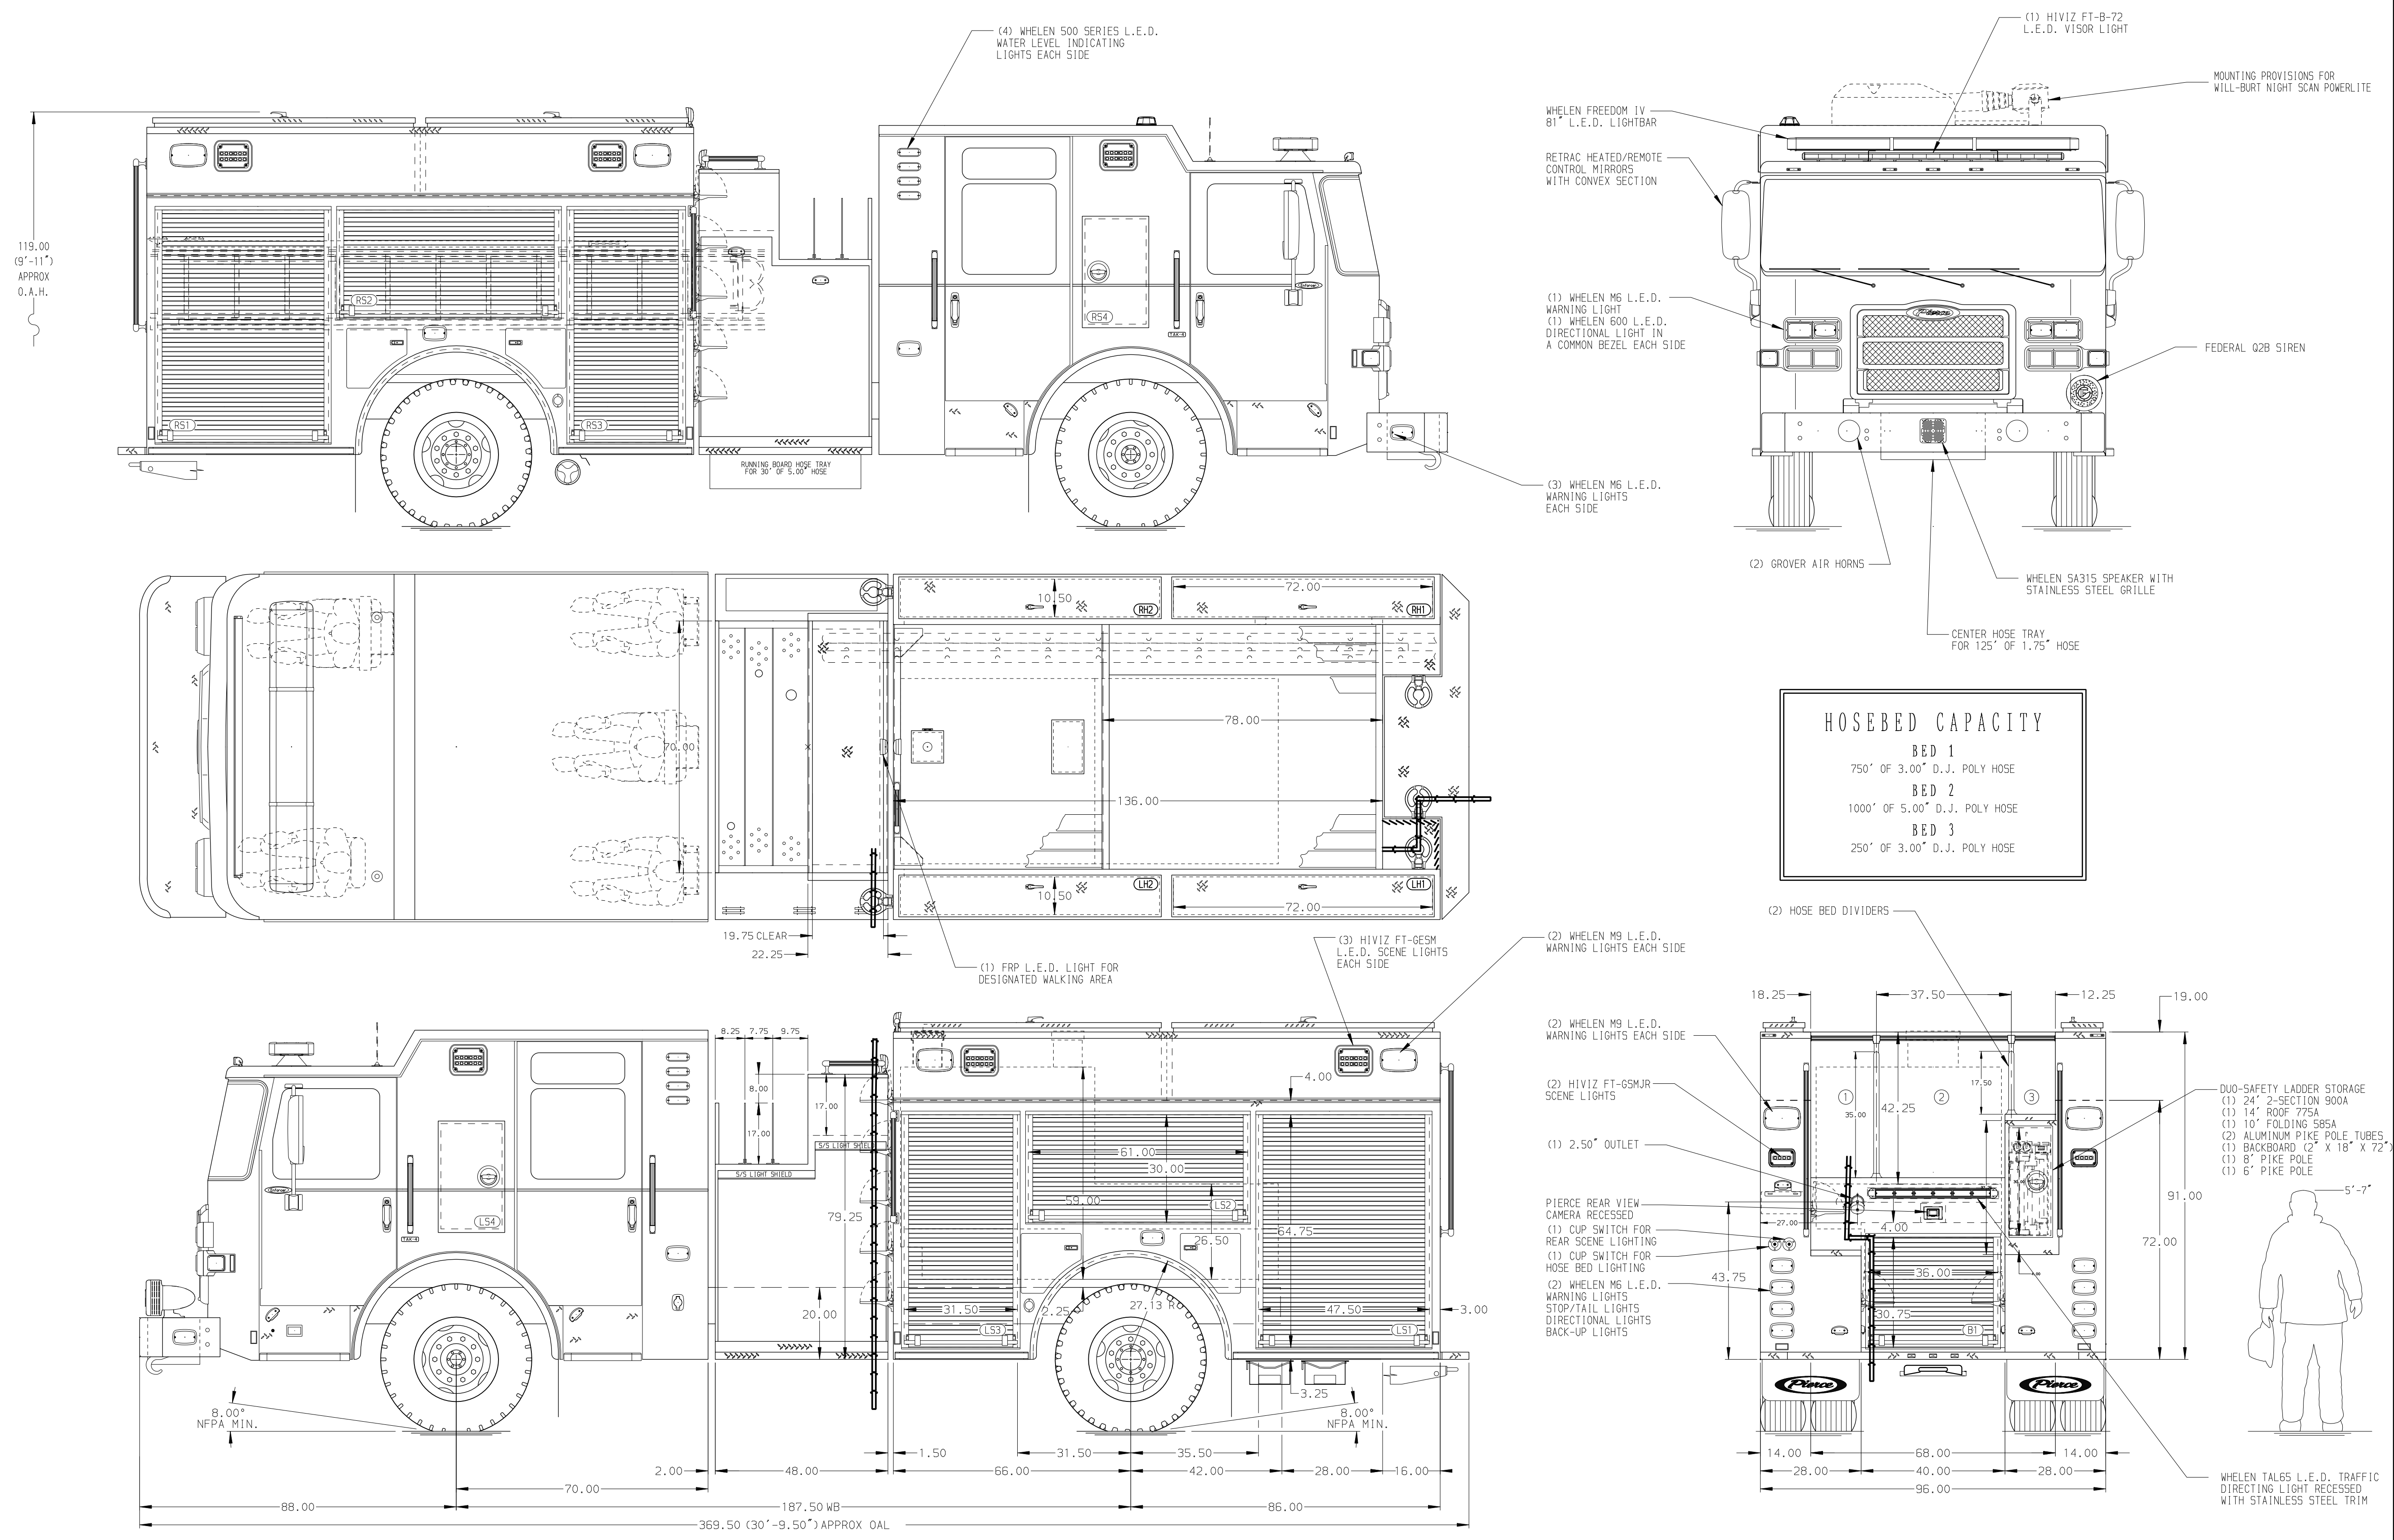

CUSTOMER APPROVAL				Pierce MANUFACTURING INC.		JOB NO.	38569
APPROVED BY: _____						SCALE	DATE
DATE: _____						1:24	
CHASSIS DATA		TITLE	Pierce Pumper Approval Drawing		DRAWN BY	COL	11APR22
MAKE		FOR	Pierce Stock Field Unit		CHECKED BY	THS	12APR22
PIERCE		DWG NO.	38569AD		SHEET SIZE	D	SHEET NO. 1 OF 1
MODEL							
ENFORCER							