


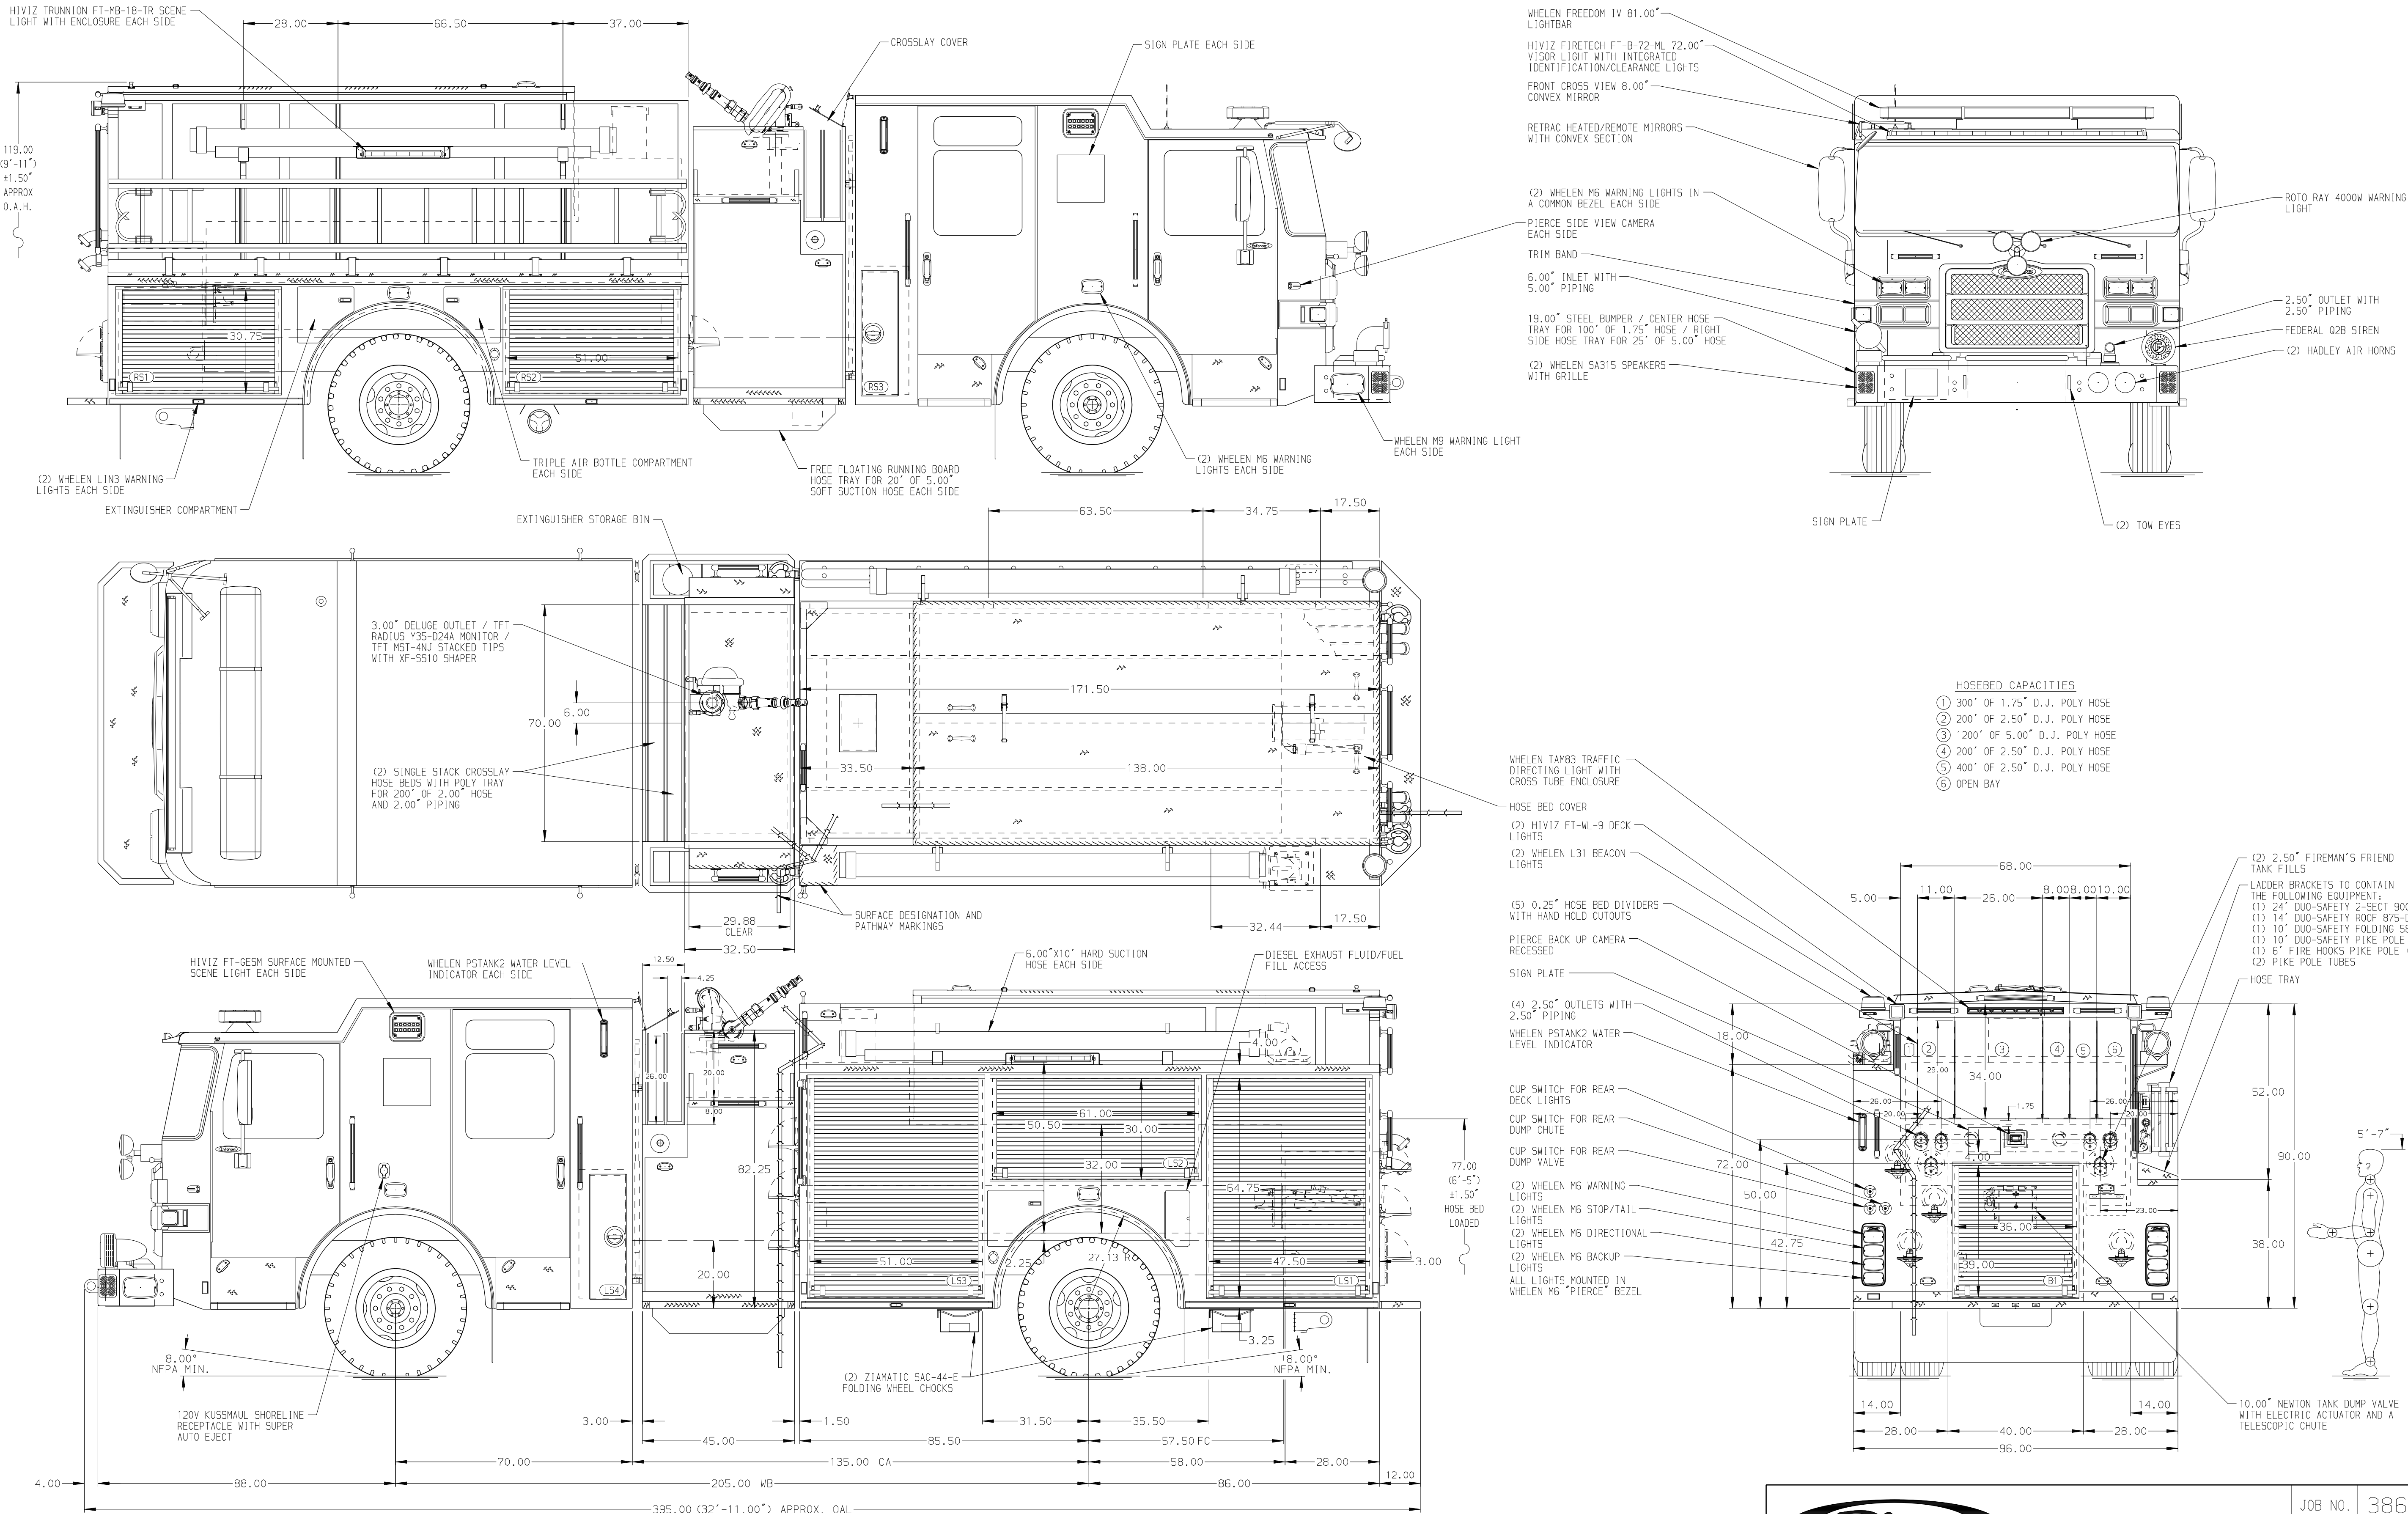

ALUMINUM BODY MAXIMUM O.A.H. 119.00" MAXIMUM O.A.L. 395.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED ON PUMP PANEL PER ORDER
3. BATTERY CHARGER LOCATED PER ORDER
4. BATTERY CHARGER INDICATOR LOCATED PER ORDER
5. FOUR FULL WIDTH/DEPTH ADJUSTABLE SHELVES WITH SIDES LOCATED PER ORDER
6. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH SIDES LOCATED PER ORDER
7. ONE SWING-OUT TOOLBOARD WITH PEGBOARD PATTERN LOCATED PER ORDER
8. TWO TRANSVERSE COMPARTMENT PARTITIONS LOCATED PER ORDER
9. TWO SPECIAL HEIGHT VERTICAL PARTITIONS LOCATED PER ORDER
10. PEGBOARD WITH TRACKS ON REAR WALL PER ORDER

11. THREE 120V DUPLEX RECEPTACLES IN REAR BODY COMPARTMENT LOCATED PER ORDER
12. ONE FULL WIDTH/DEPTH SLIDE-OUT ADJUSTABLE TRAY WITH SIDES LOCATED PER ORDER

REV	DATE	BY	CH	ENFORCER
05JAN24	BST	CSH	MAKE	
21NOV23	BST	CSH	PIERCE	
14SEP23	BST	CDU	MODEL	

		JOB NO.	38669
TITLE		SCALE	DATE
FOR		DRAWN BY	06SEP23
DWG NO.		CHECKED BY	07SEP23
38669AD		SHEET SIZE	SHEET NO.
		D	1 OF 1

1500-D-1000P, 171" PUMPER BODY, DELUGE, BOOSTER REEL
RIGHT SIDE LADDER BRACKETS, 45" SIDE CONTROL
NORTH SIDE FIRE AND RESCUE
CLAYTON, NORTH CAROLINA