

Medium Aluminum 2nd Gen Pumper
CHASSIS
Saber FR Chassis

AXLE, REAR
27,000 lb Dana Axle

380 HP Cummins L9 Engine
TRANSMISSION
Allison 6th Gen, 3000 EVS P

19" Extended Stainless Steel

6010 Saber FR Cab

COMPT, PUMPER, REAR
51.25" FF Rollup Rear Compt

COMPT, PUMPER, RIGHT SIDE
152" Rollup Full Height Front & Rear FDLER

45" Control Zone Top Mount

1250 GPM Waterous CS

1.50" Crosslays Not Required

2.50" Crosslay Not Required

(2) 1.50" W/Tray Std. Capacity




Generator Not Required

Husky 3 Single Agent Foam System

20 Gallon Foam Cell, Reduced Water

Side Roll and Frontal Impact Protection

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

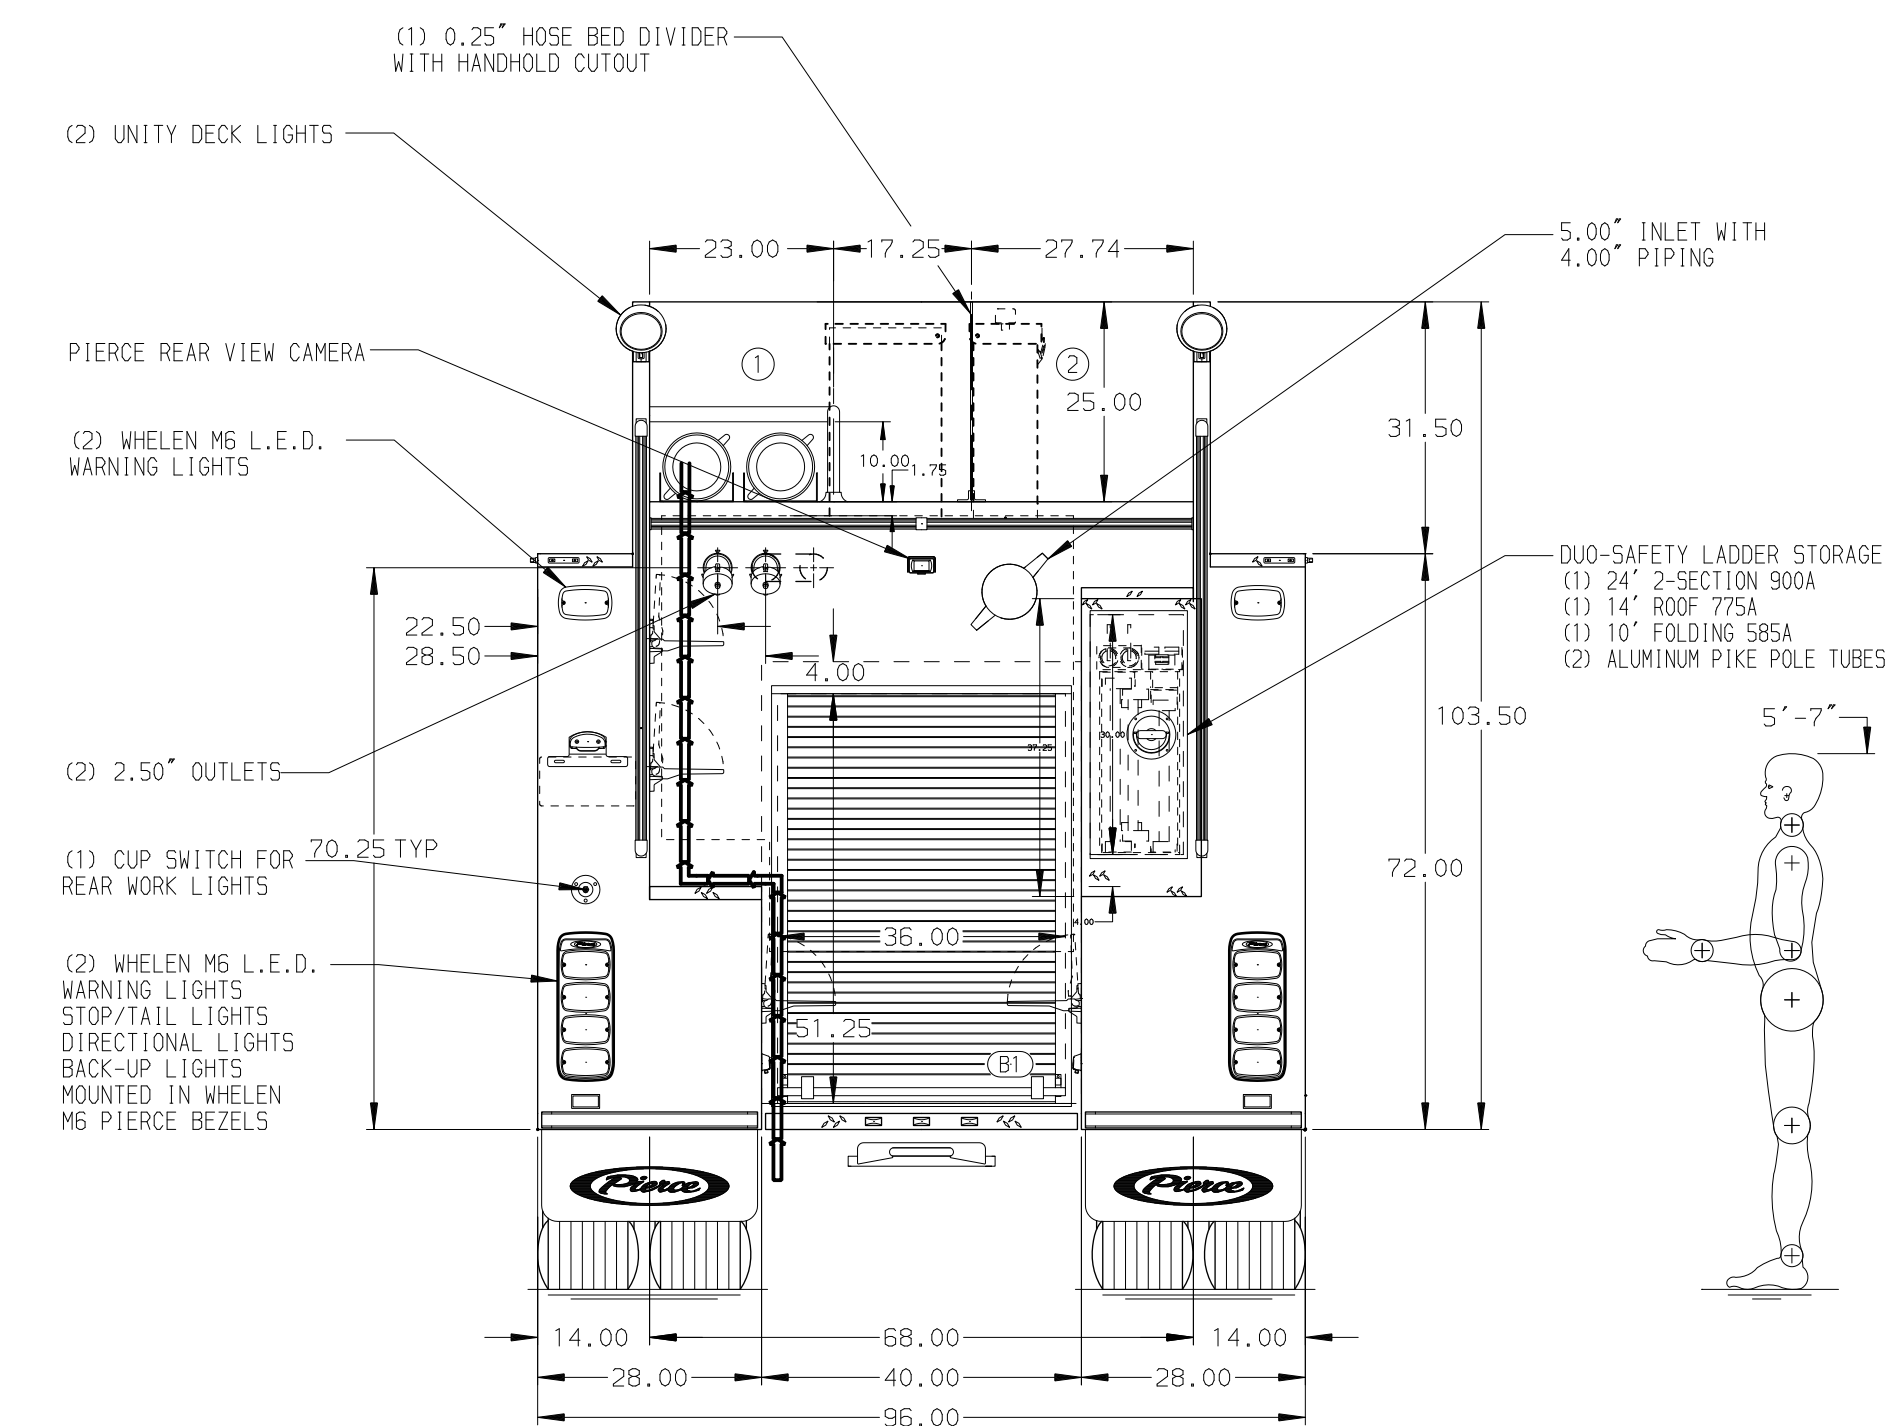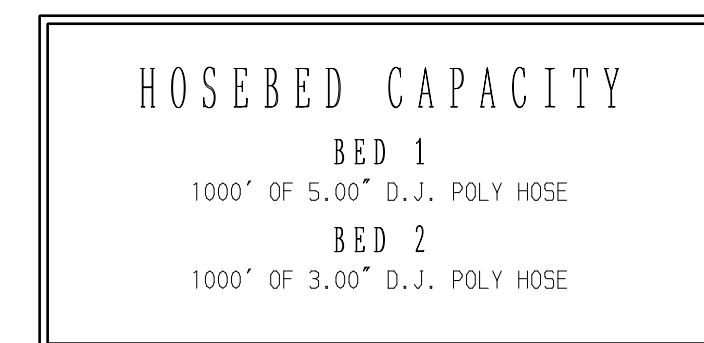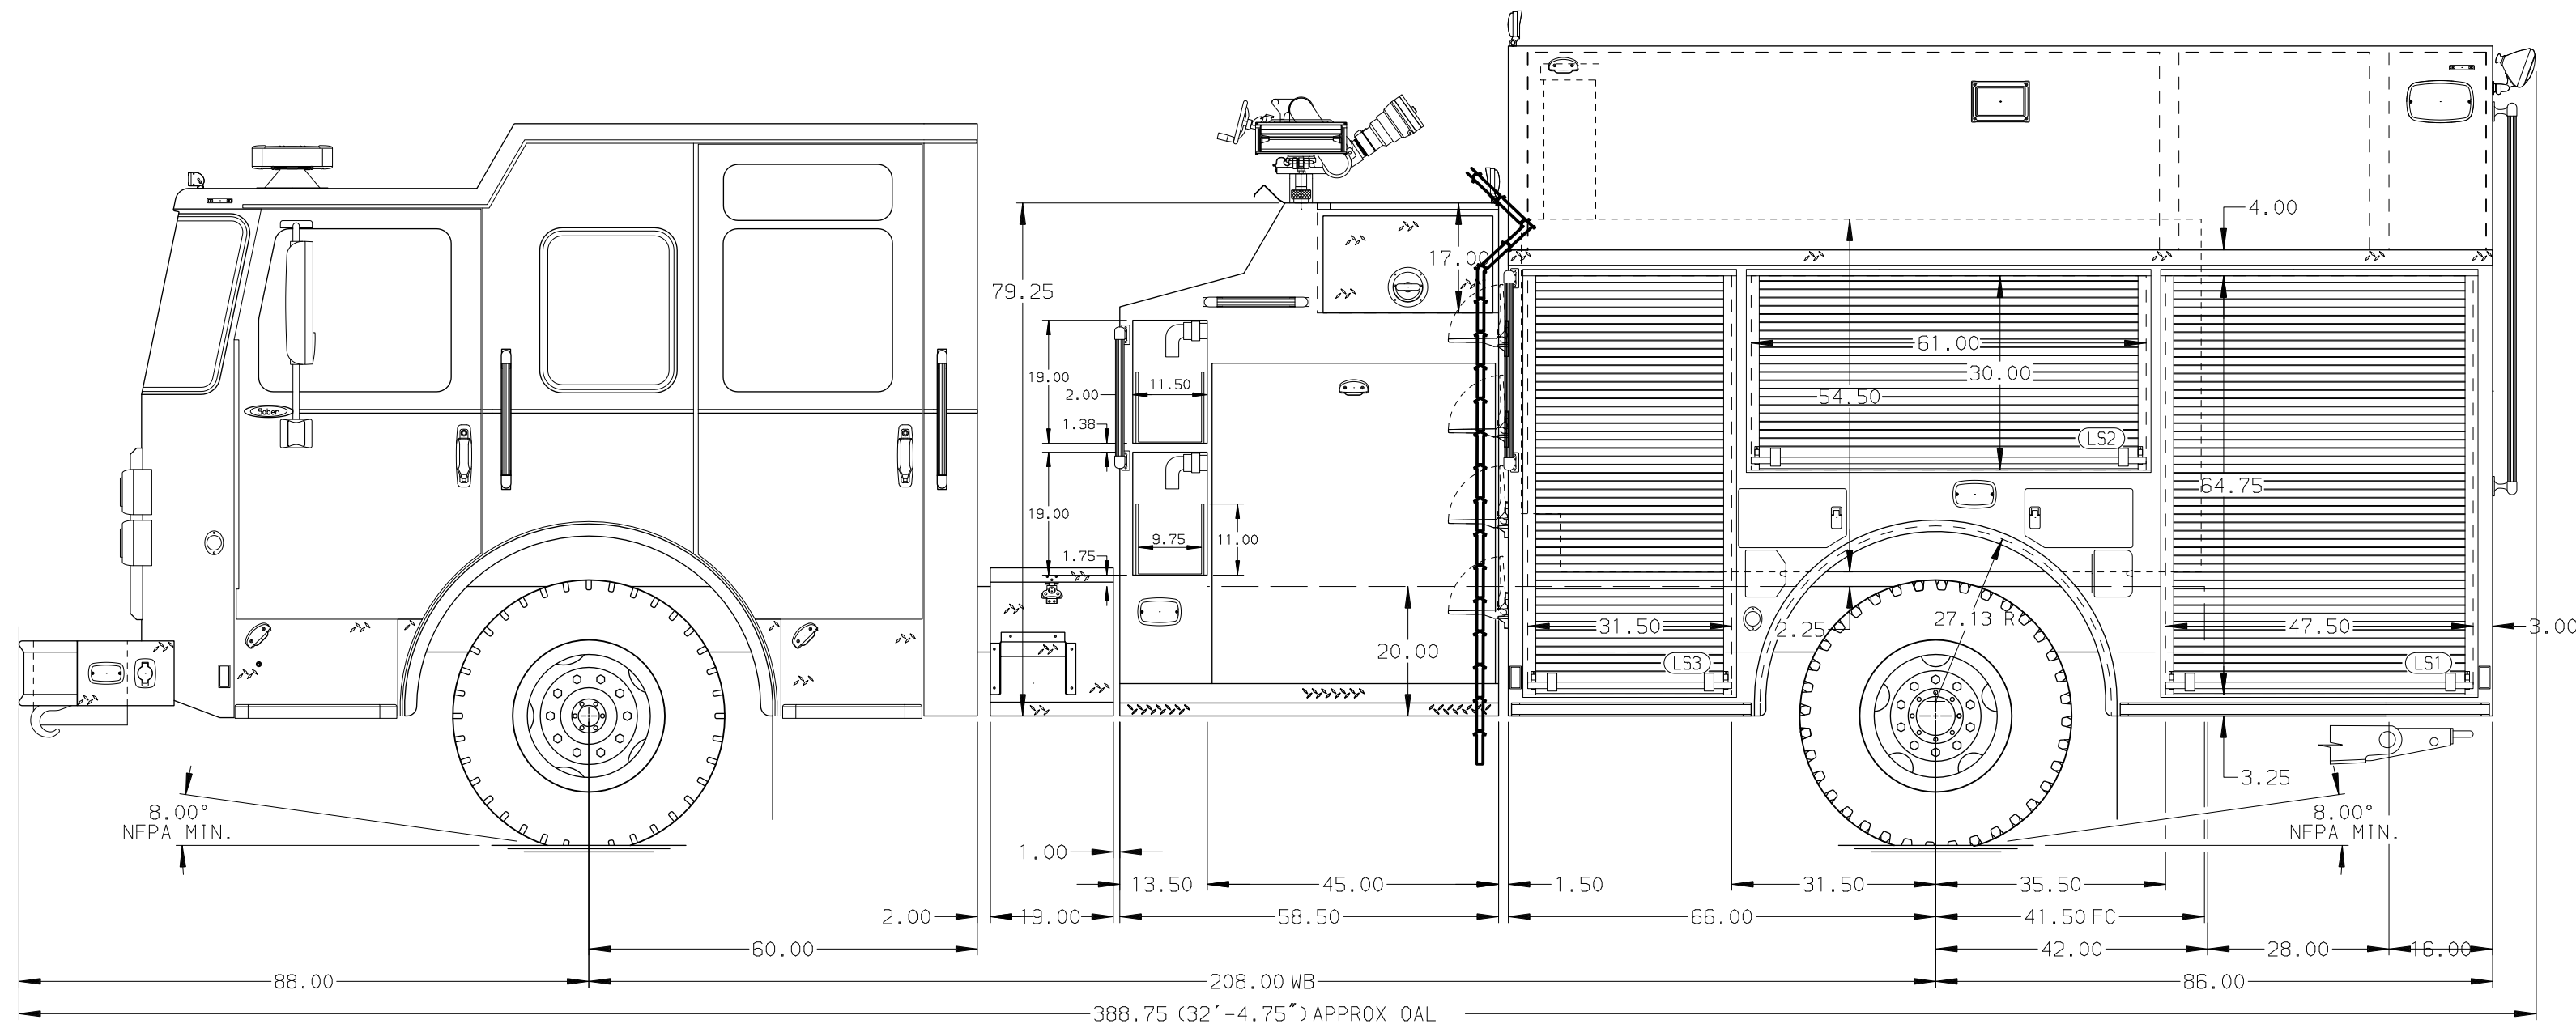

CUSTOMER APPROVAL					 MANUFACTURING INC.		JOB NO.	38789
APPROVED BY: _____ DATE: _____							SCALE	DATE
				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	DRAWN BY	040CT22
				MAKE	FOR	Goodhue	CHECKED BY	18NOV22
				PIERCE			COL	
				MODEL	DWG	38789AD	SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	SABER FR	NO.		D	1 OF 1