

**PUMPER BODY**

Long Aluminum 2nd Gen Pumper

**CHASSIS**

Enforcer Chassis

**CHASSIS AXLE, FRONT, CUSTOM**

20,000 Lb Dana Axle

**AXLE, REAR**

31,000 Lb Dana Axle (Derated 29,800 Lb)

**ENGINE**

450 HP Cummins L9 Engine

**TRANSMISSION**

Allison 6th Gen, 3000 EVS P

**BUMPER**

19" Extended Painted Steel

**CAB**

7010 Enforcer Cab

**BODY**

**WATER TANK**

500 Gallon New York Style Water Tank

**COMPT, PUMPER, REAR**

23.50" FF Lap Rear Compt

**COMPT, PUMPER, LEFT SIDE**

171" Lap Full Height & Depth Front & Rear

**COMPT, PUMPER, RIGHT SIDE**

171" Lap Full Height & Depth Front & Rear

**FIRE SUPPRESSION PUMPHOUSE**

45" Control Zone Side Mount

**PUMP**

1250 GPM Waterous CS

**CROSSLAYS, 1.50"**

(2) 1.50" 200' of 1.50"

(1) 1.50" 300' of 1.50" (Dead Lay)

**CROSSLAYS, 2.50"**

2.50" Not Required

**SPEEDLAYS**

Speedlays Not Required

**GENERATOR**

Generator Not Required

**Foam System**

Foam System Not Required


**Foam Cell**

Foam Cell Not Required

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 2.50 OUTLET WITH 2.50 PIPING AND SWIVEL LOCATED ON TOP BUMPER RIGHT AND LEFT SIDE
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED DRIVER SIDE STEP WELL
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- AIR OUTLET WITH SHUT OFF VALVE ON DRIVER SIDE PUMP PANEL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- AUTOMATIC TIRE CHAINS
- JUMPER STUDS DRIVER SIDE CAB STEP

MAXIMUM O.A.H. 120.00" MAXIMUM O.A.L. 390.00"

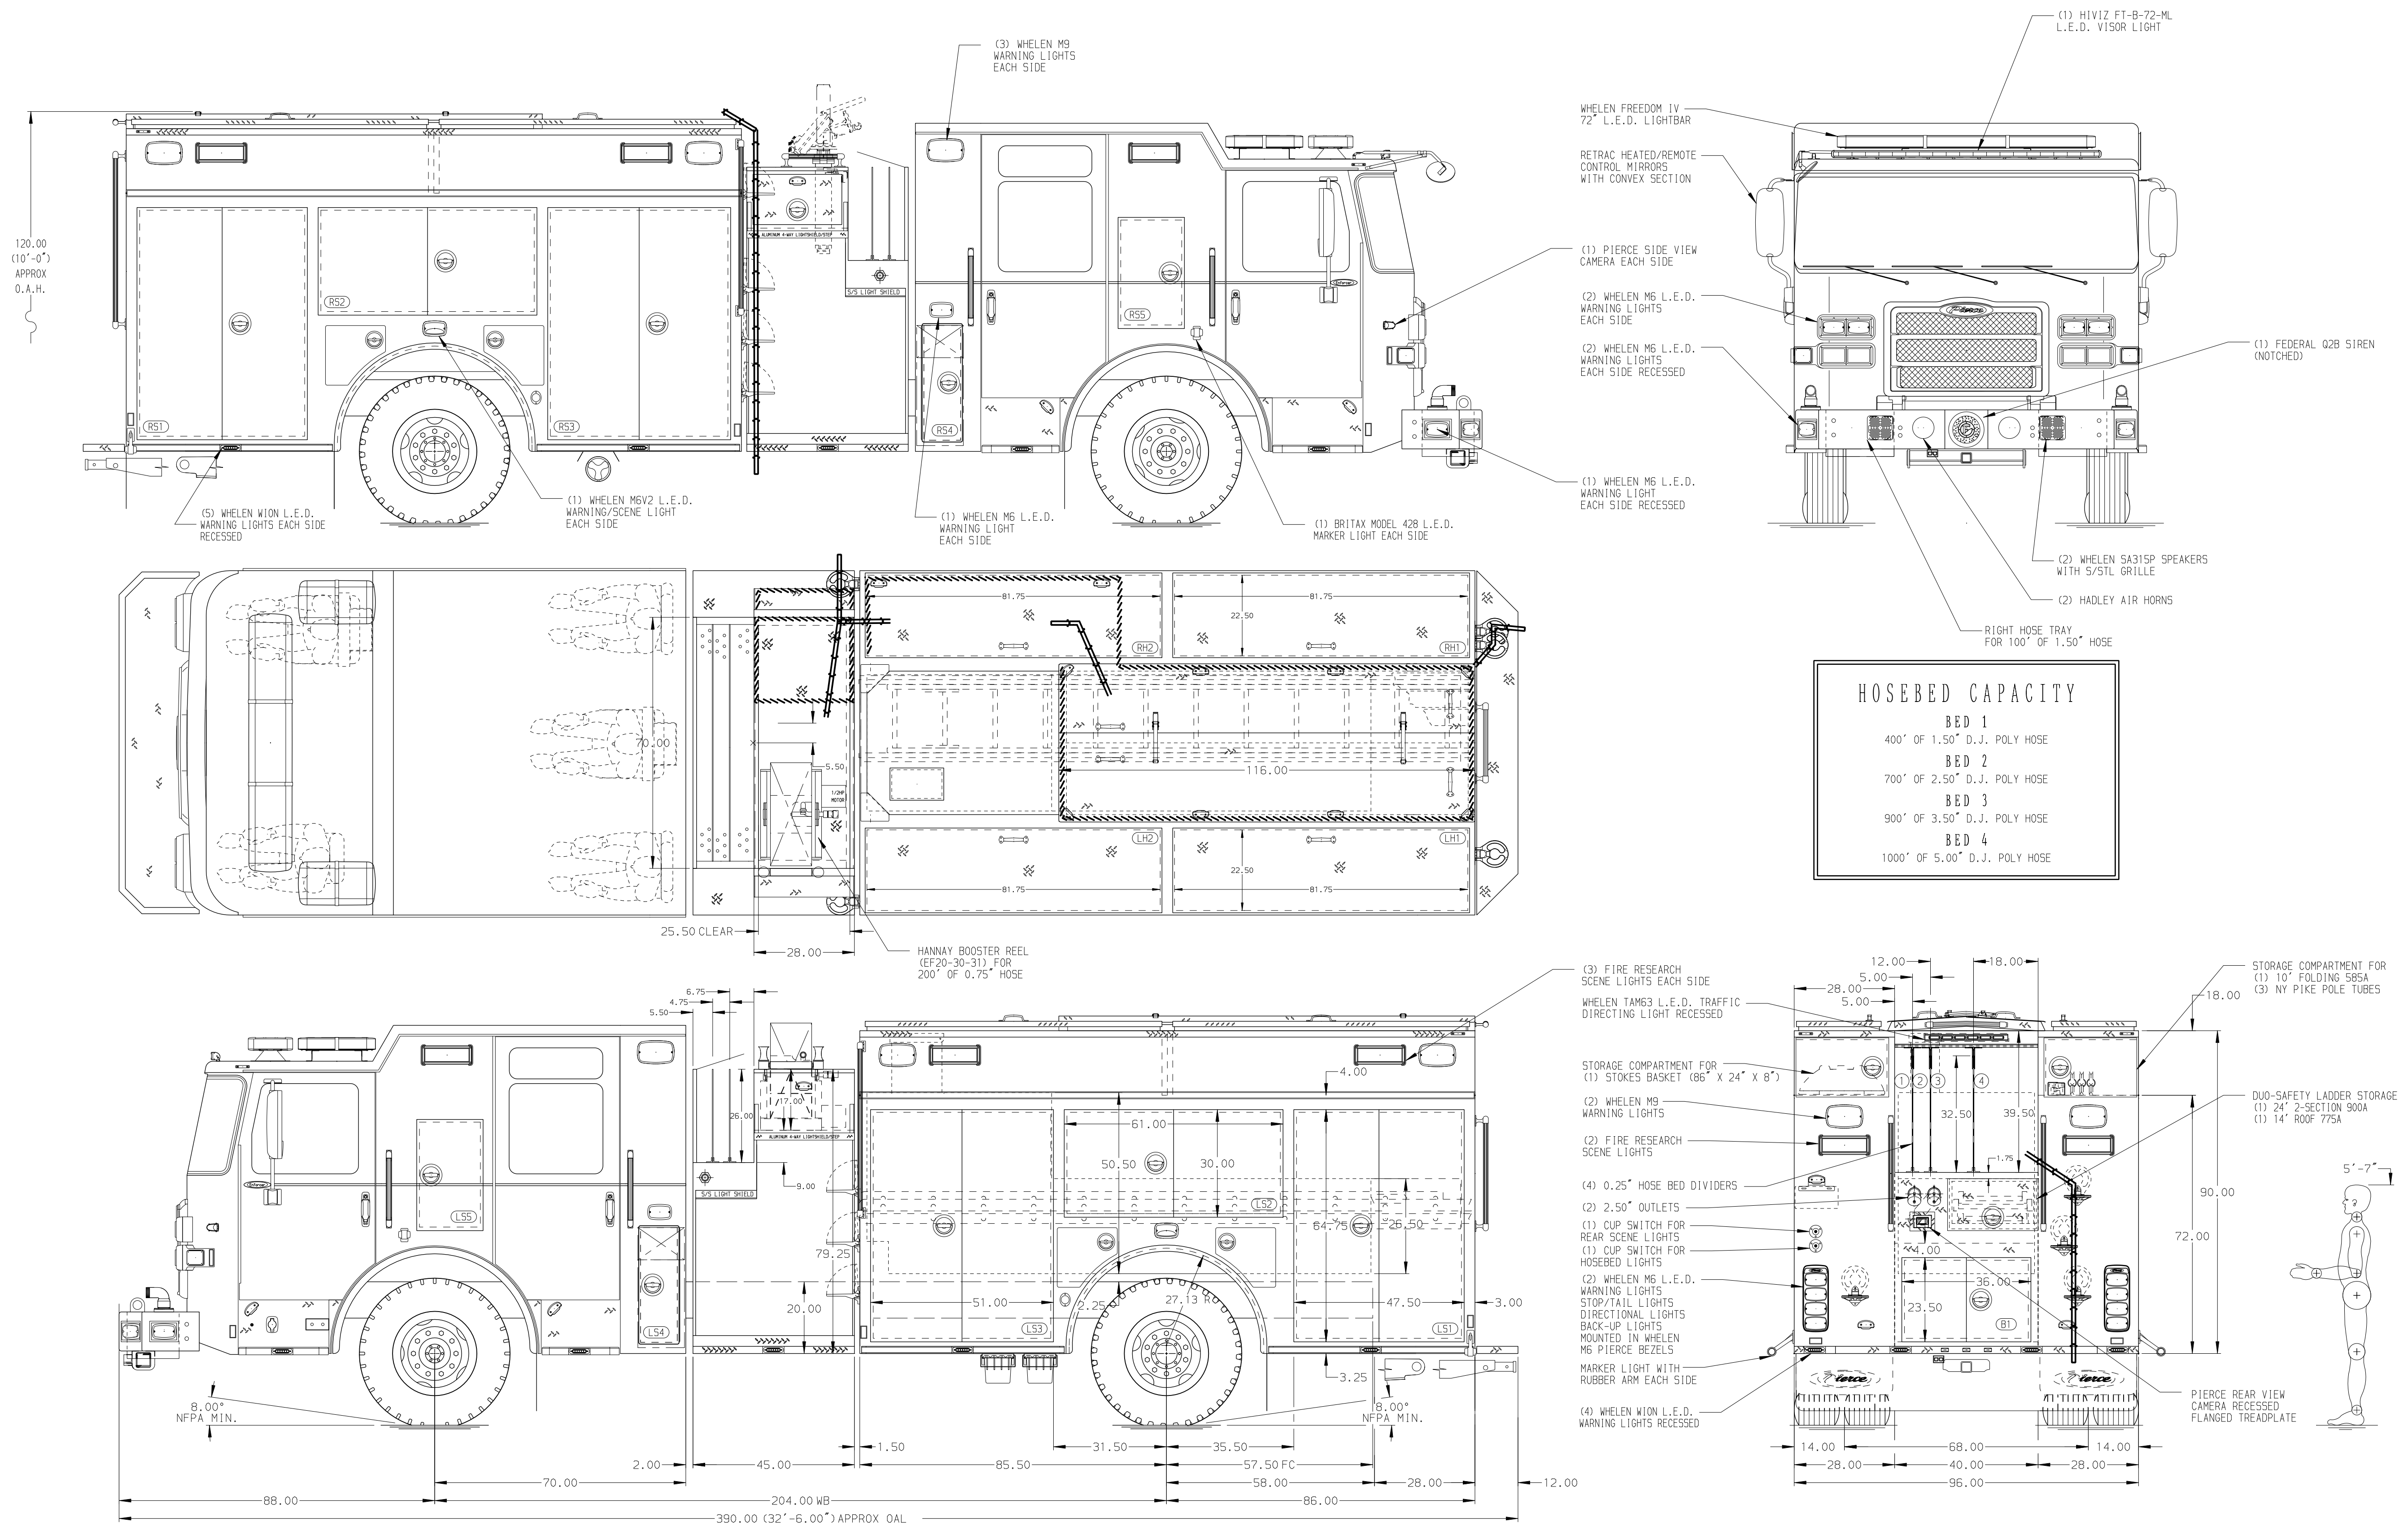

<b>Pierce MANUFACTURING INC.</b>		JOB NO.	39239
		SCALE	DATE
		1:24	
TITLE		Pierce Pumper Approval Drawing	
FOR		Bensalem Township	
DRAWN BY		MMF	15AUG22
CHECKED BY		COL	23AUG22
DWG NO.		39239AD-SH1	SHEET NO.
			1 OF 2

REV	DATE	BY	CH	ENFORCER
09FEB23	MMF	COS		CHASSIS DATA
12JAN23	MMF	COS		MAKE
22DEC22	MMF	COS		PIERCE
20OCT22	MMF	COS		MODEL