

Enforcer Chassis

24,000 Lb Dana Axle

450 HP Cummins L9 Engine

ALLison 6th Gen, 3000 EVS P

16" Extended Painted Steel

7000 Enforcer Cab

30.75" Single Lap Door LS, Open Plumbing RS

5" Longer Than STD Short Body

5" Longer Than STD Short Body

45° Side Control

1500 GPM Waterous CSU

(2) 1.50" Standard Capacity

2.50" Crosslay Not Required

Speedlays Not Required

Generator Not Required


Foam System Not Required

Foam Cell Not Required


NOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 2.50 OUTLET WITH 2.50 PIPING AND SWIVEL LOCATED ON TOP BUMPER LEFT SIDE
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER STEWELL
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. KUSSMAUL AIR COMPRESSOR LOCATED PER SHOP ORDER
6. ADJUSTABLE SHELVES LOCATED PER ORDER
7. ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER

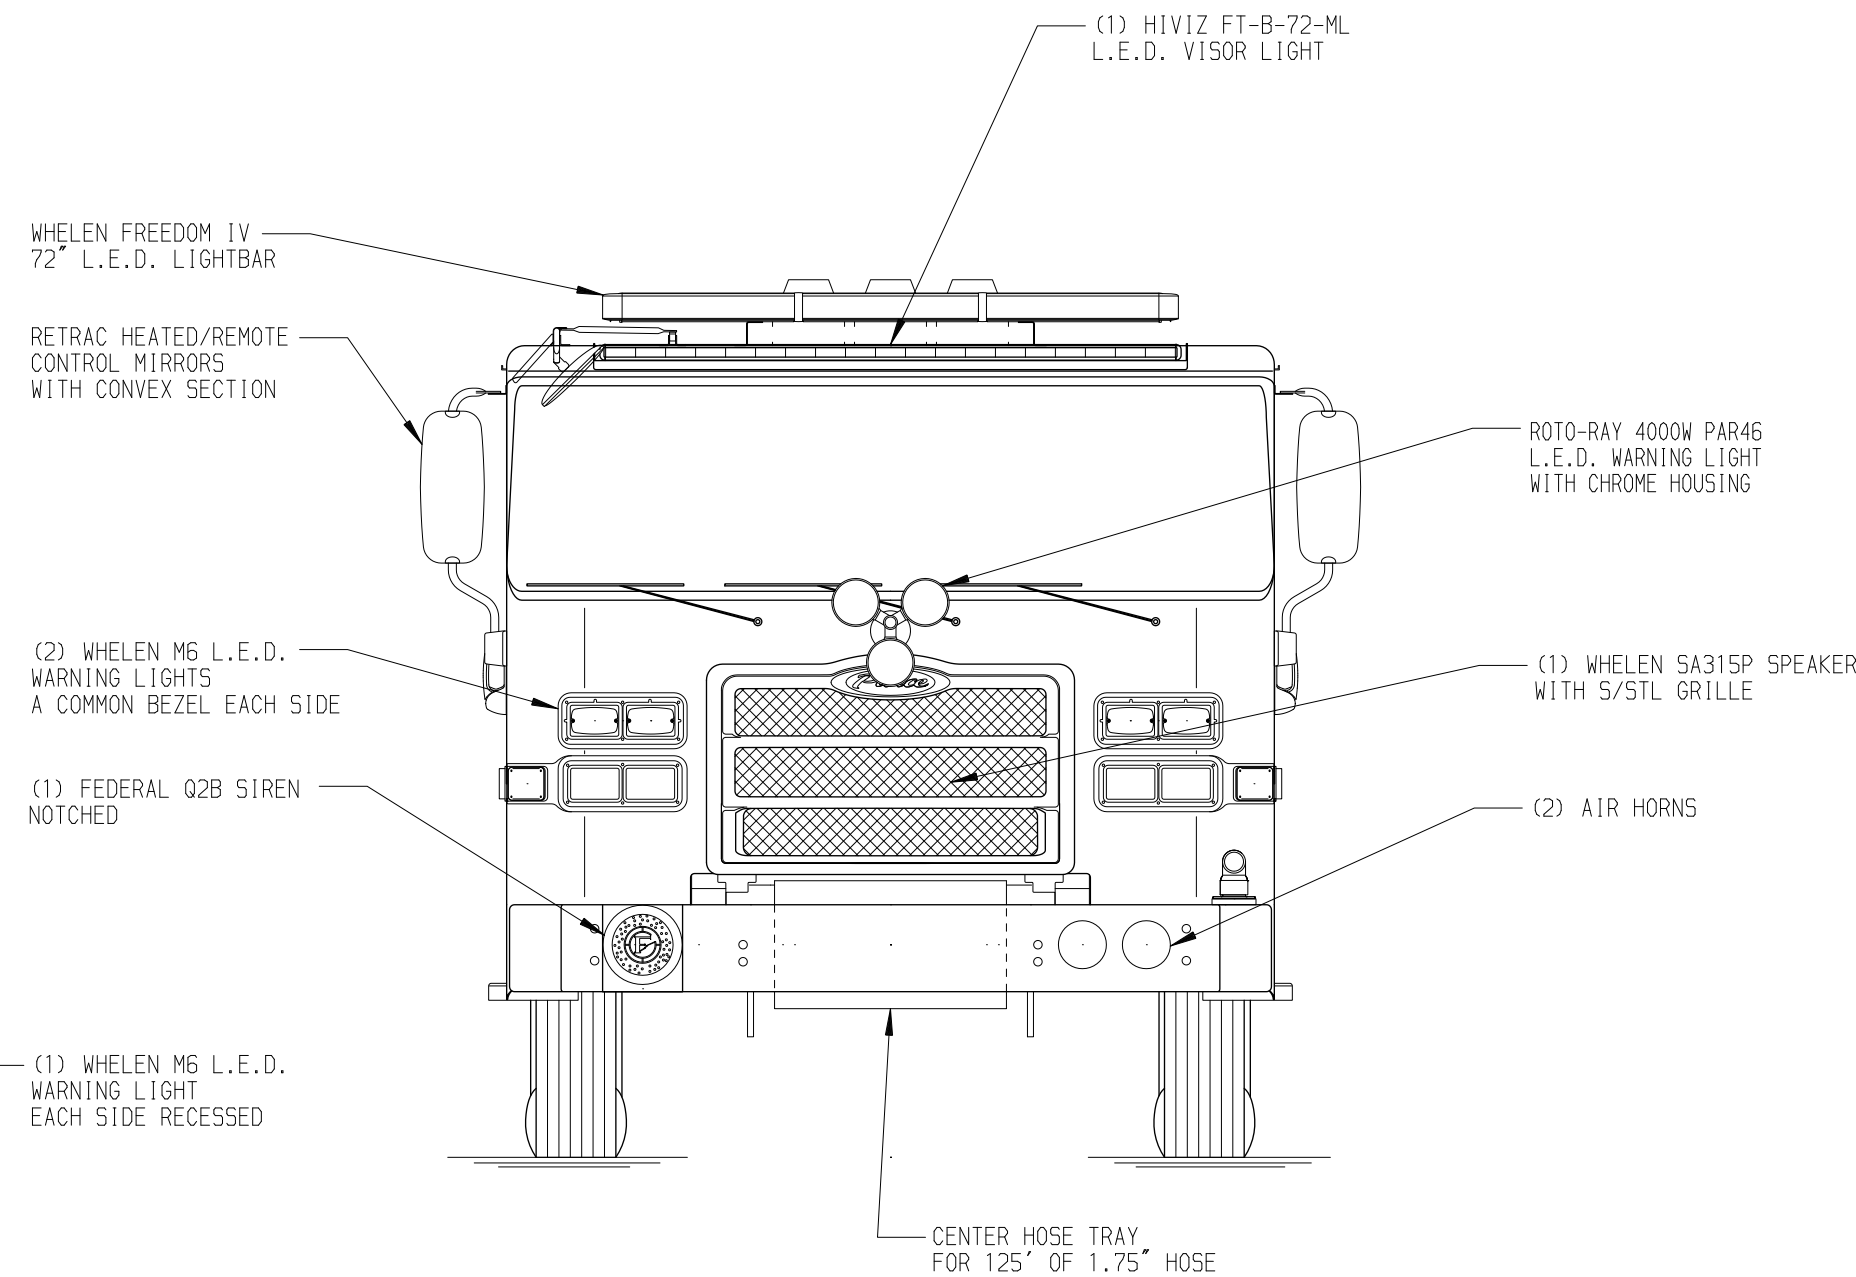

HOSEBED CAPACITY	
BED 1	
250' OF 1.75" D.J.	POLY HOSE
BED 2	
250' OF 1.75" D.J.	POLY HOSE
BED 3	
500' OF 5.00" D.J.	POLY HOSE
BED 4	
300' OF 3.00" D.J.	POLY HOSE
BED 5	
200' OF 2.50" D.J.	POLY HOSE

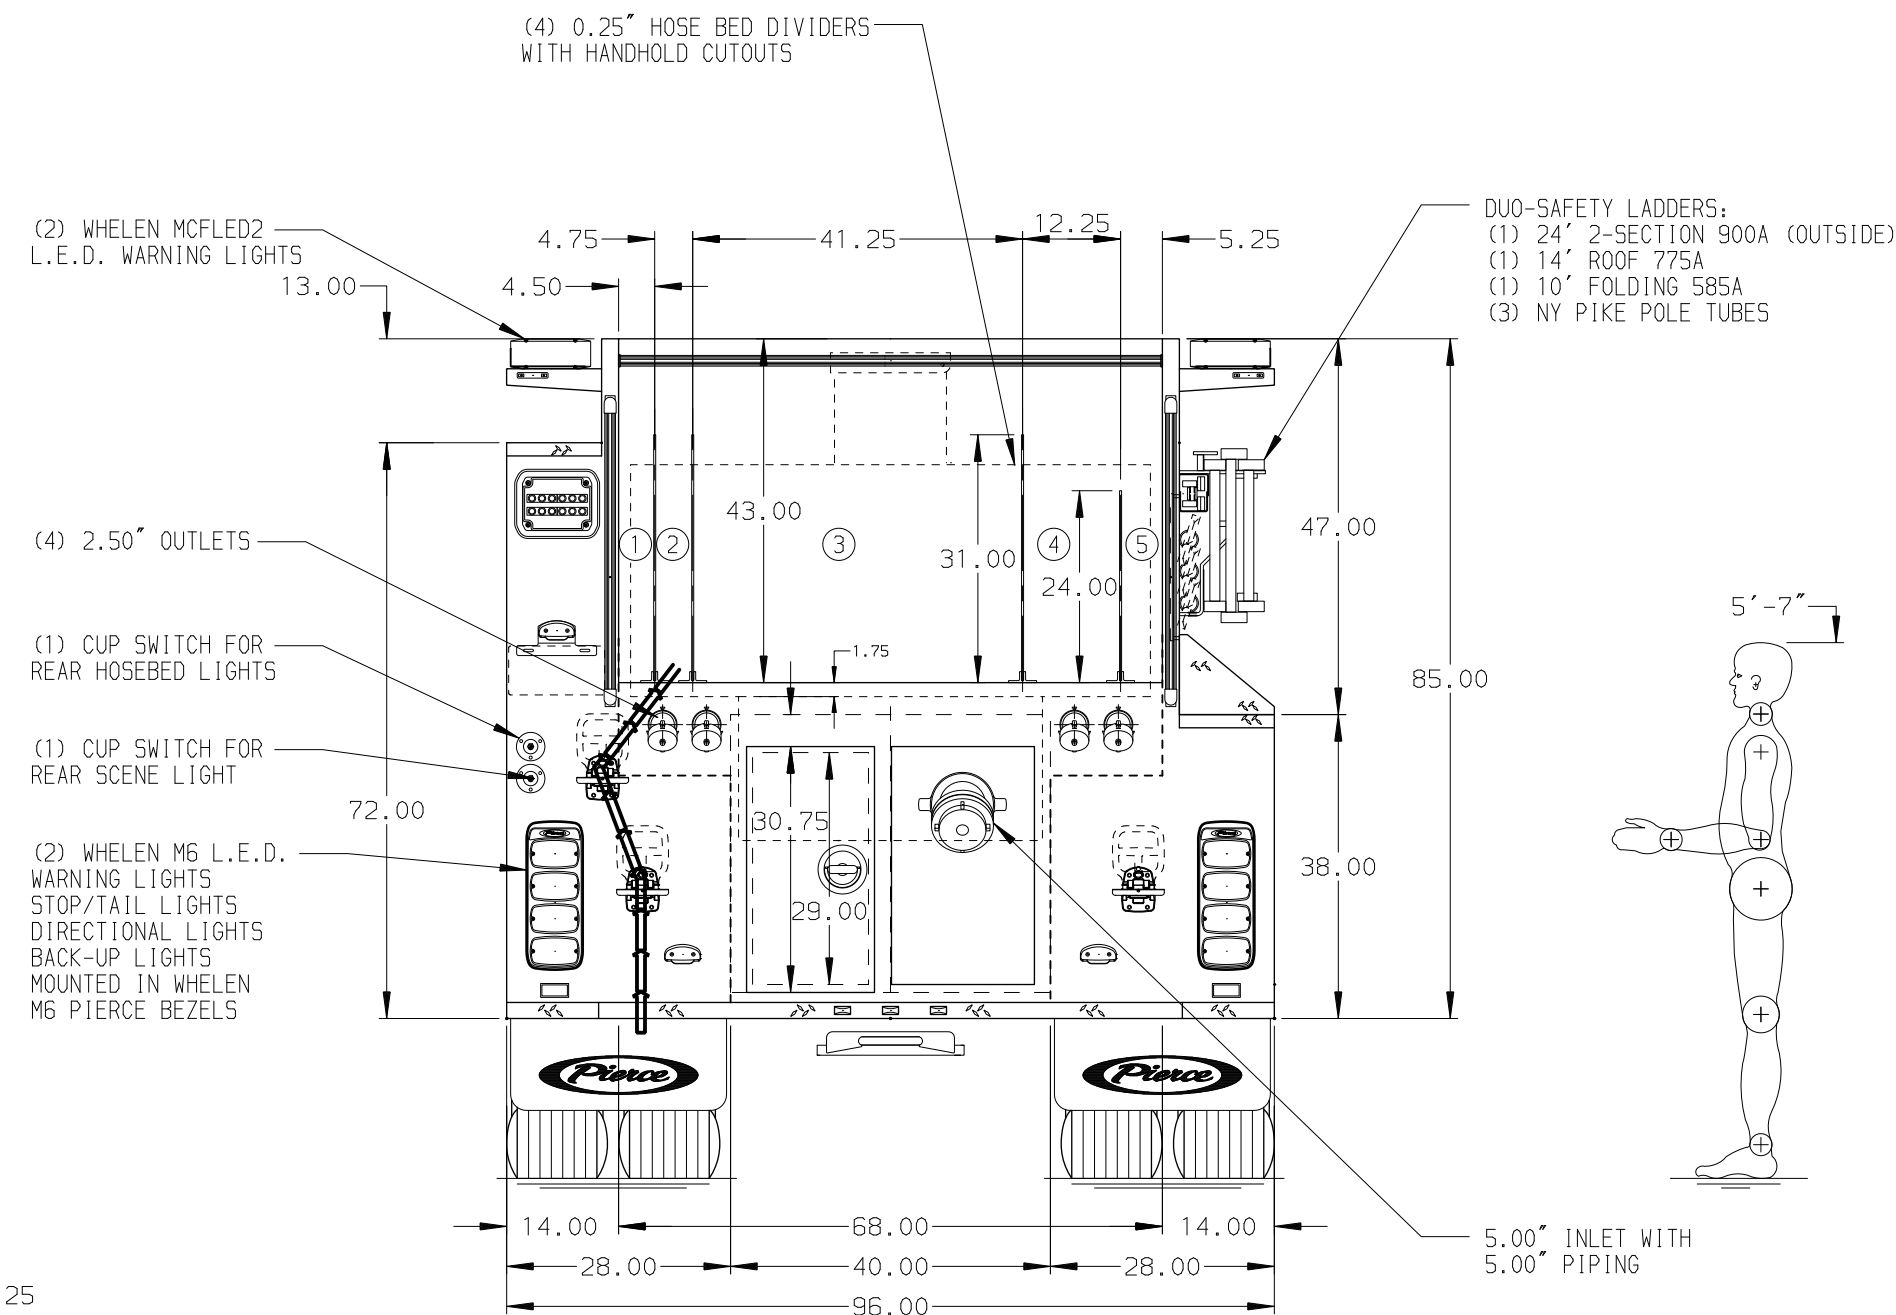

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	DRAWN BY	090CT23
	20FEB24	MMF	ZWE	MAKE	FOR	Glick Fire Equipment Co, Inc	CHECKED BY	100CT23
	03JAN24	MMF	ZWE	PIERCE			AM	
	30NOV23	MMF	ZWE	MODEL	DWG	39526AD	SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	ENFORCER	NO.		D	1 OF 1