

Long Aluminum 2nd Gen Pumper
CHASSIS
Saber FR Chassis

CHASSIS
AXLE, FRONT, CUSTOM
TAK-4 19,500 lbs.

AXLE, REAR
27,000 lb Meritor Axle

ENGINE
450 HP Cummins L9 Engine

TRANSMISSION
Allison 6th Gen, 3000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Saber FR Cab

BODY
WATER TANK
980 Gallon Poly Water Tank
COMPT, PUMPER, REAR
44.50" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE
161" RollUp Full Height Front & Rear FDLR

COMPT, PUMPER, RIGHT SIDE
161" Rollup Full Height Front & Rear FDLER

52" Control Zone Side Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity


SPEEDLAYS

Speedlays Not Required

GENERATOR
Generator Not Required


F o a m S y s t e m
Husky 3, Single Agent

Foam Cell
20 Gallon Foam Cell, Reduced Water

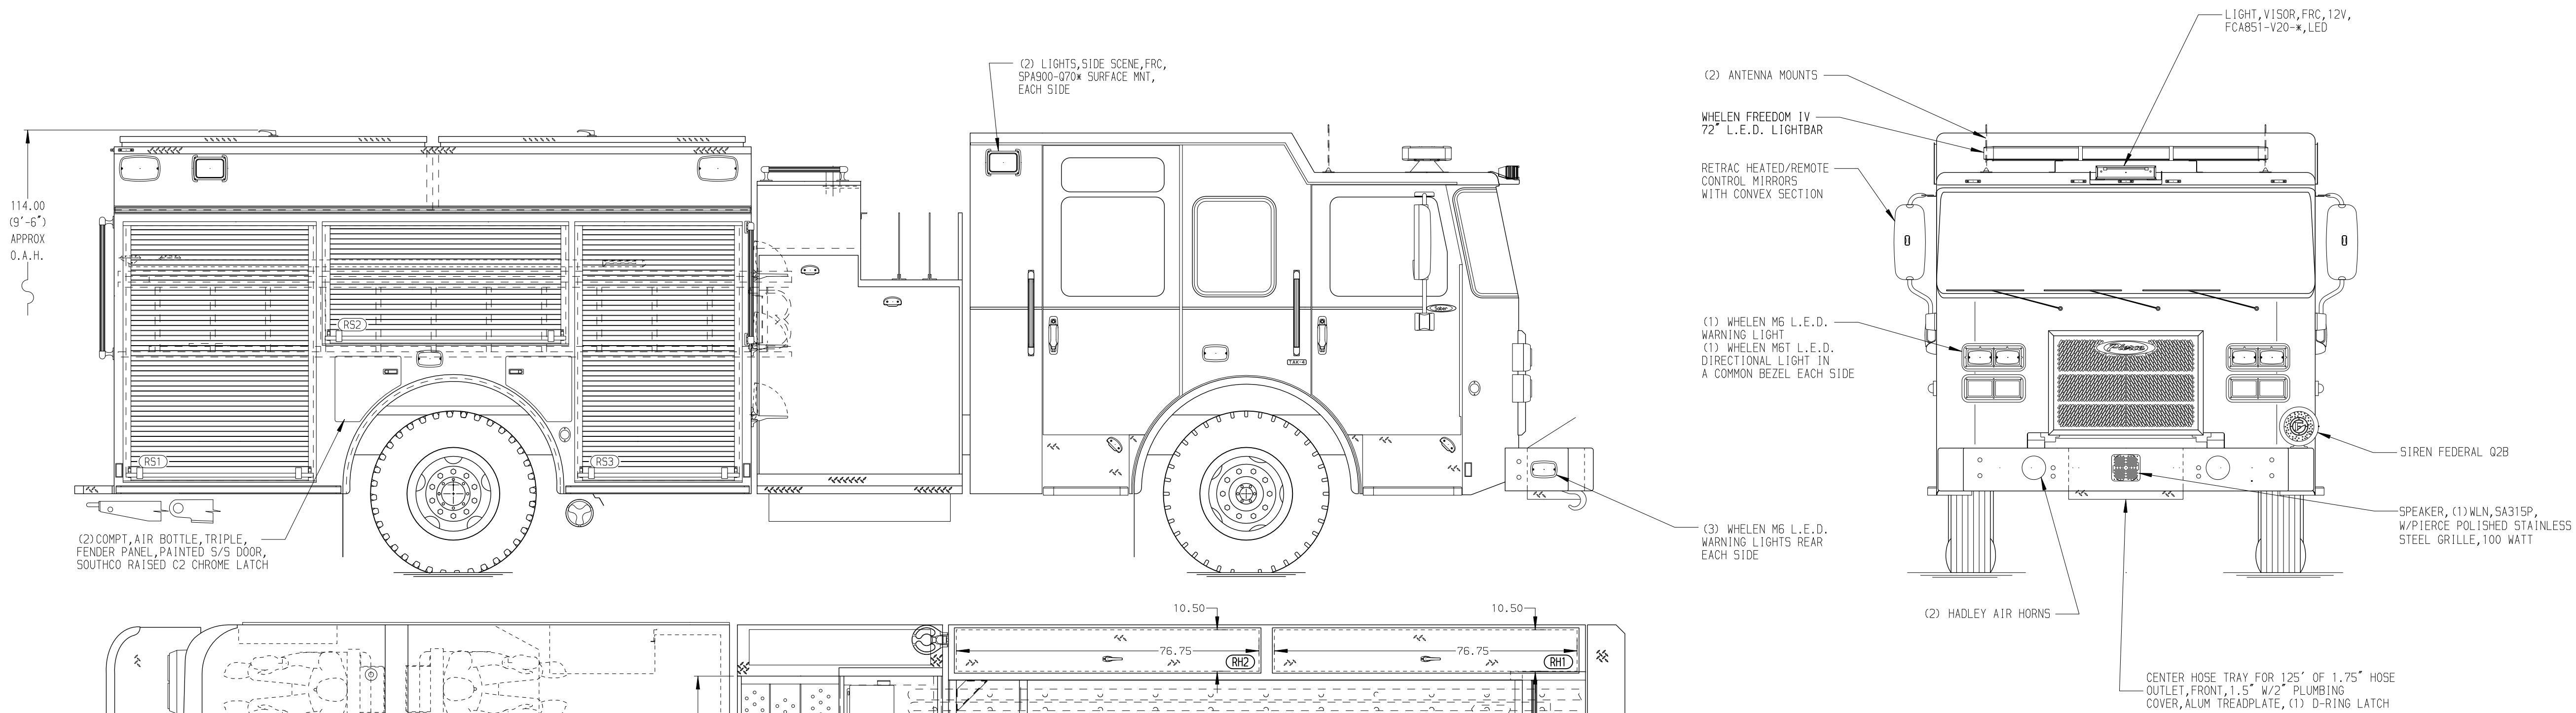

HOSEBED CAPACITY

BED 1
300' OF 2.50" D.J. POLY HOSE
BED 2
1000' OF 5.00" D.J. POLY HOSE
BED 3
300' OF 2.50" D.J. POLY HOSE

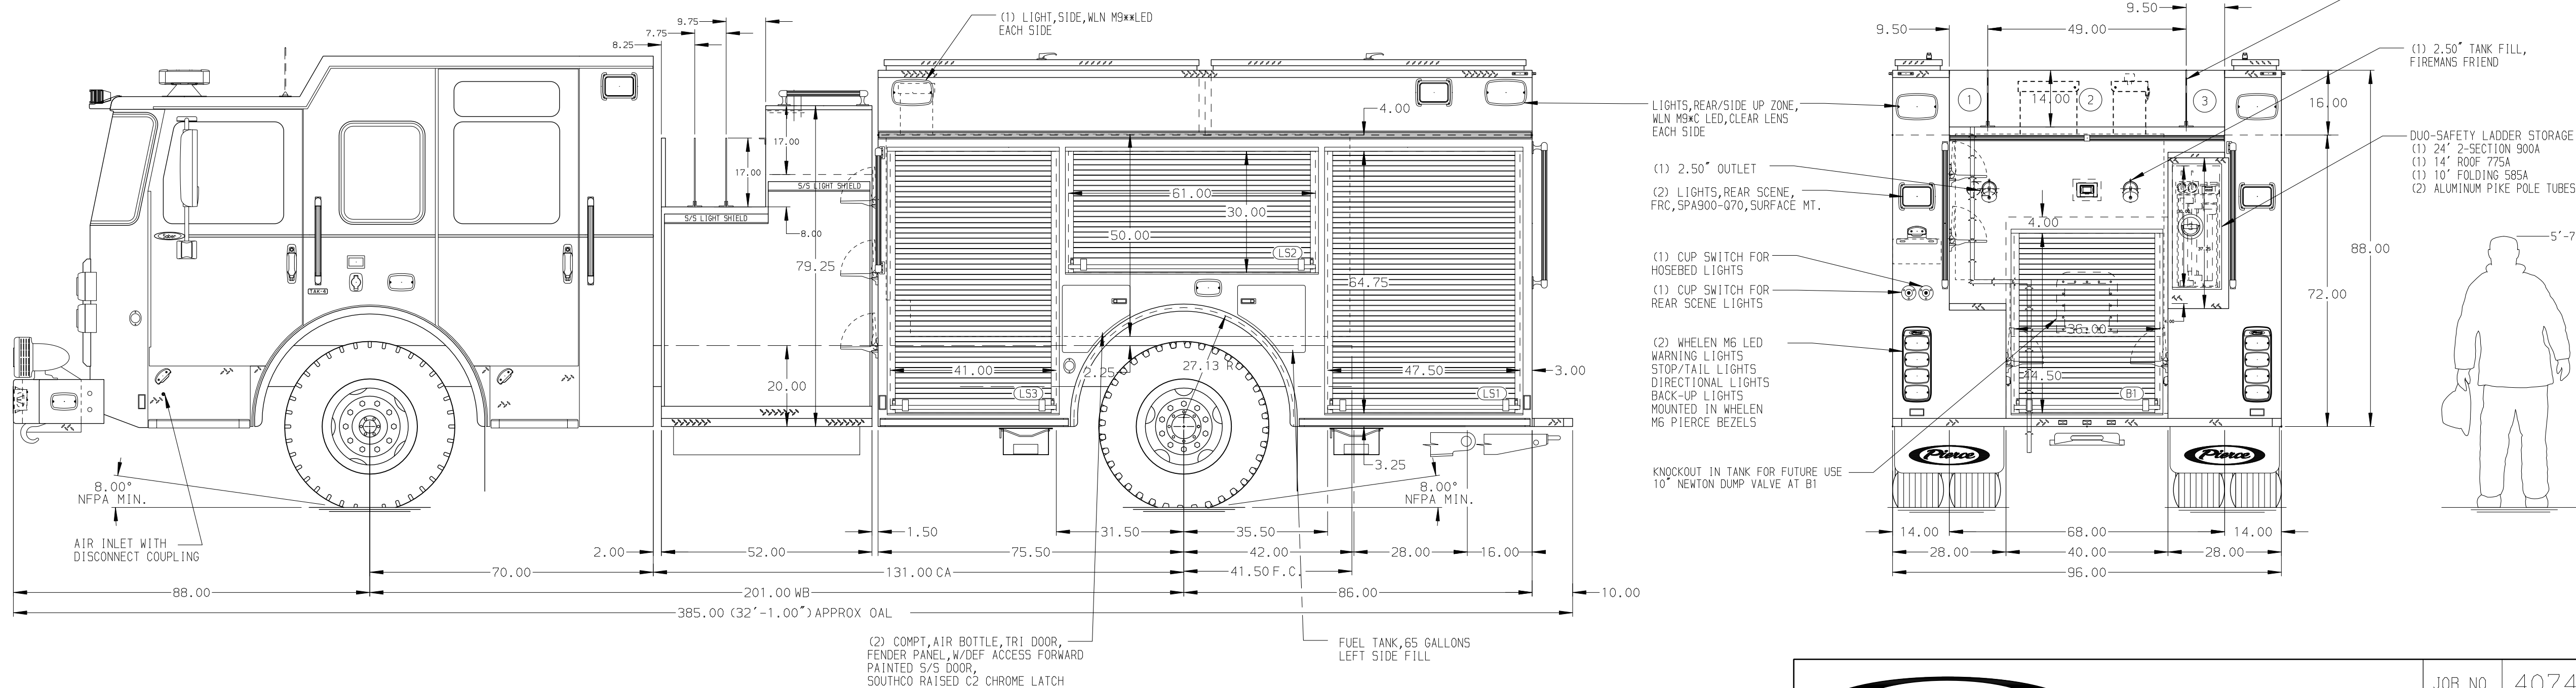

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OULET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPPWELL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. FLOOR-MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
8. MOUNTING PROVISIONS FOR FRONT INLET
9. MOUNTING PROVISIONS FOR WILL BURT NIGH SCAN POWERLITE NS 3.0 10" ON CAB

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	DRAWN BY	20APR23
				MAKE	FOR	PIERCE FIELD UNIT	CHECKED BY	20APR23
				PIERCE			JAP	
	RWR	14JUN23	JAP	MODEL	DWG	40742AD	SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	SABER FR	NO.		D	1 OF 1